

High Power Amplifier at 8 Watt Psat Operating from 1.5 GHz to 3.5 GHz with 19.5 dB Gain, 45 dBm IP3 and SMA

PE15A5005 is a broadband high IP3 8 W GaAs PHEMT MMIC-based coaxial power amplifier module designed to be used in a wide range of commercial and defense applications in the 1.5 to 3.5 GHz frequency range. The amplifier offers 19.5 dB small signal gain with the typical gain flatness of ± 1.25 dB, along with high IP3 performance of 45 dBm. This performance is achieved through the use of advanced GaAs PHEMT MMIC circuitry. The amplifier operates over the temperature range of -40°C to 85°C , and characterized by a light weight (45 g) and small size (1.5"x1.2"x0.56"). To facilitate an effective heat dissipation structure, the amplifier module has 4 screw slots for mounting to a heat sink.

Electrical Specifications

(TA = $+25^{\circ}\text{C}$)

Description	Min	Typ	Max	Unit
Frequency Range	1.5		3.5	GHz
Small Signal Gain		19.5		dB
Gain Flatness		± 1.25		dB
Psat		+39		dBm
Efficiency Psat		32		%
P1dB		+38.5		dBm
Output 3rd Order Intercept Point		+45		dBm
Noise Figure		10		dB
Impedance (Input)		50		Ohms
Impedance (Output)		50		Ohms
Input Return Loss		15		dB
Output Return Loss		8		dB
Operating Temperature Range	-40		+85	$^{\circ}\text{C}$
Thermal Resistance		6		$^{\circ}\text{C/W}$

Mechanical Specifications

Size	
Length	1.2 in [30.48 mm]
Width	1.5 in [38.1 mm]
Height	0.56 in [14.22 mm]
Weight	0.1025 lbs [46.49 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature	
Operating Range	-40 to $+85$ deg C
Storage Range	-55 to $+135$ deg C

Features:

- 1.5 GHz to 3.5 GHz Frequency Range
- P1dB Output Power: 38.5 dBm
- Psat: 39 dBm
- Small Signal Gain: 19.5 dB
- Gain Flatness: ± 1.25 dB
- Power Added Efficiency @Psat: 32%
- 50 Ohm Input and Output Matched
- -40 to $+85^{\circ}\text{C}$ Operating Temperature
- Small Size & Light Weight

Applications:


- Telecom Infrastructure
- Fixed Microwave Backhaul
- Wireless Internet Access
- Wireless Local Loop
- GPS Applications
- WLAN Repeaters
- Microwave Radio Systems
- Military & Space
- Radar & Sensors
- Commercial 2-Way Radio
- Driver Amplifier
- High Power Output Amplifier
- General Purpose Amplification

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

- Notes:
- Values at 25 °C, sea level
 - ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
 - Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink. The amplifier module has 4 screw slots for mounting to a heat sink.
 - DO NOT apply Vds without proper negative voltage on Vgs pins.

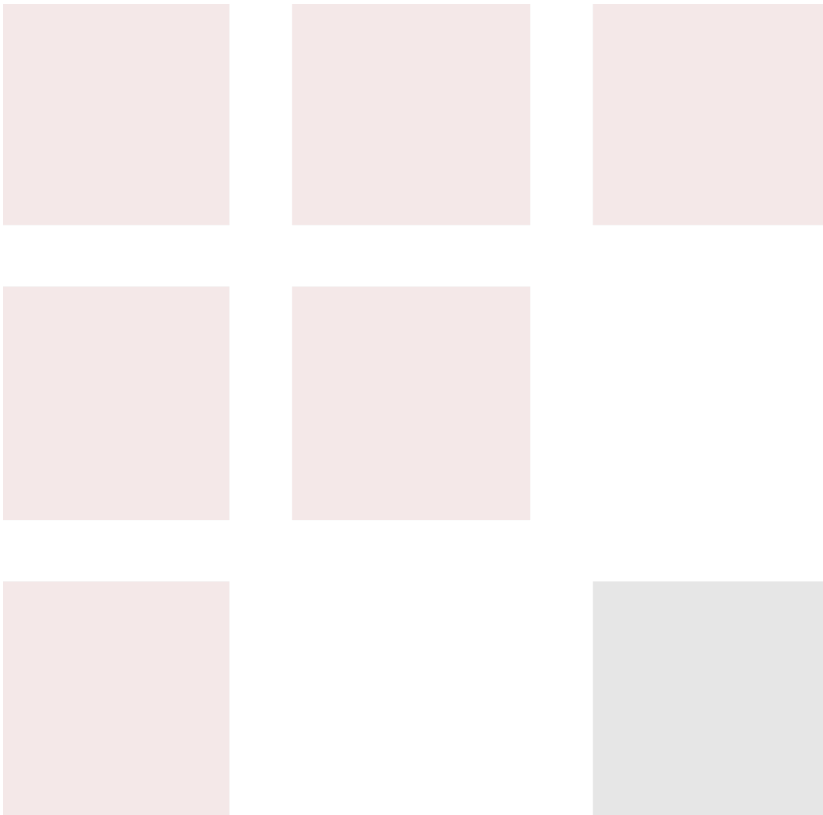

Amplifier Power-up Precautions

- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 P_{in} for Small Signal Gain = P1dB-SSG-10 dB
 P_{in} for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 50ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

- GaAs PHEMT MMIC-Based Power up sequence

High Power Amplifier at 8 Watt Psat Operating from 1.5 GHz to 3.5 GHz with 19.5 dB Gain, 45 dBm IP3 and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [High Power Amplifier at 8 Watt Psat Operating from 1.5 GHz to 3.5 GHz with 19.5 dB Gain, 45 dBm IP3 and SMA FMAM5005](https://www.fairviewmicrowave.com/high-power-amplifier-8watt-19.5db-fmam5005-p.aspx)

URL: <https://www.fairviewmicrowave.com/high-power-amplifier-8watt-19.5db-fmam5005-p.aspx>