

FMC0303143 DATA SHEET

TNC Male to TNC Male Cable RG142 Coax

The TNC male to TNC male cable using RG-142 coax, part number FMC0303143, from Fairview Microwave is in-stock and ships same day. This Fairview TNC to TNC cable assembly has a male to male gender configuration with 50 ohm flexible RG-142 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC0303143 TNC male to TNC male cable assembly operates to 8 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Т	ур	Max	ι	Inits	
Frequency Range	DC			8		GHz	
Velocity of Propagation		70			%		
Capacitance		29.39	[96.42	2]	pF/f	t [pF/m]	

Mechanical Specifications

Cable Assembly

Weight 0.06702 lbs [30.4 g]

Cable

Cable Type Impedance Inner Conductor Type

Inner Conductor Material and Plating

Dielectric Type Number of Shields Shield Layer 1

Shield Layer 2 Jacket Material Jacket Diameter RG-142 50 Ohms Solid

Copper Clad Steel, Silver

PTFE 2

Silver Plated Copper Braid Silver Plated Copper Braid

FFP

0.195 in [4.95 mm]

Connectors

Description	Connector 1	Connector 2		
Туре	TNC Male	TNC Male		
Impedance	50 Ohms	50 Ohms		
Contact Material & Plating	Brass, Gold	Brass, Gold		
Contact Plating Spec.	MIL-G-45204	MIL-G-45204		
Dielectric Type	Teflon	Teflon		
Body Material & Plating	Brass, Nickel	Brass, Nickel		

Mechanical Specification Notes:



Configuration:

- TNC Male
- TNC Male
- RG-142

Features:

- Max Frequency 8 GHz
- 70% Phase Velocity
- · Double Shielded
- FEP Jacket

Applications:

- General Purpose
- · Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





*All cable assemblies have a length tolerance of 1.5% or \pm 3/8", whichever is greater.

Environmental Specifications

Temperature

Operating Range -55 to +200 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

FMC0303143 - xx uu | cm = Centimeters

 Length

Example: FMC0303143-12 = 12 inches long cable

FMC0303143-100cm = 100 cm long cable

TNC Male to TNC Male Cable RG142 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: TNC Male to TNC Male Cable RG142 Coax FMC0303143

URL: https://www.fairviewmicrowave.com/tnc-male-tnc-male-cable-rg142-coax-fmc0303143-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

REV Page 2 of 3

Copyright © 2018





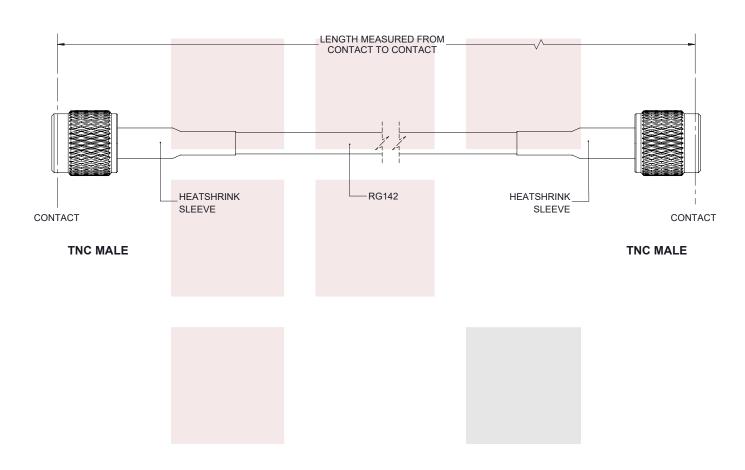

STANDARD TOLERANCES

.X ±0.2 .XX ±0.01 .XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

Fairview Microwave!	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
TNC Male to TNC Male Cable RG142 Coax	DWG NO FMC0303143				CAGE CODE 3FKR5		
The Male to The Male Cable RG142 Coax	CAD FILE 032918	SHEET 1 OF 1	SCAL	E N/A	SIZE A	7361	