

FMCA2714-150CM DATA SHEET

SMA Male Right Angle to BNC Female Bulkhead Cable in 150 CM Length Using RG223 Coax

The RA SMA male to BNC female bulkhead cable using RG223 coax, part number FMCA2714-150CM, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to BNC cable assembly has a male to female gender configuration with 50 ohm flexible RG223 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA2714-150CM SMA male to BNC female cable assembly operates to 4 GHz. The right angle SMA interface on the RG223 cable allows for easier connections in tight spaces. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| - | | | | |
|-------------------------|-----|-------------|-------|--------------|
| Description | Min | Тур | Max | Units |
| Frequency Range | DC | | 4 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 66 | | % |
| Capacitance | | 30.8 [101.0 |)5] | pF/ft [pF/m] |
| Operating Voltage (AC) | | | 500 | Vrms |

| Performance by | Freq <mark>ue</mark> | ncy | | | | |
|-----------------------|----------------------|------|------|------|------|-------|
| Description | F1 | F2 | F3 | F4 | F5 | Units |
| Frequency | 0.1 | 0.25 | 0.5 | 1 | 4 | GHz |
| Insertion Loss (Typ.) | 0.5 | 0.61 | 0.75 | 0.96 | 1.74 | dB/ft |
| | 1.64 | 2 | 2.46 | 3.15 | 5.71 | dB/m |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Length* Weight

Cable

Cable Type Impedance Inner Conductor Type 59.06 in [150.01 cm] 0.2146 lbs [97.34 g]

RG223 50 Ohms Solid



Configuration:

- SMA Male Right Angle
- BNC Female Bulkhead
- RG223

Features:

- Max Frequency 4 GHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 Shield Layer 2 Jacket Material Jacket Diameter Copper, Silver PE 2 Silver Plated Copper Braid Silver Plated Copper Braid PVC, Black 0.209 in [5.31 mm]

Repeated Minimum Bend Radius

1 in [25.4 mm]

Connectors

| Description | Connector 1 | Connector 2 | |
|-----------------------------|---------------------|-------------------------------|--|
| Туре | SMA Male | BNC Female | |
| Mount Method | | Bulkhead | |
| Specification | MIL-STD-348A | MIL-STD-348A | |
| Impedance | 50 Ohms | 50 Ohms | |
| Contact Material & Plating | Brass, Gold | Brass, Gold | |
| Contact Plating Spec. | 50 µin minimum | 30 µin minimum | |
| Dielectric Type | PTFE | PTFE | |
| Body Material & Plating | Brass, Nickel | Brass, Nickel | |
| Body Plating Spec. | 100 µin minimum | 100 µin mini <mark>mum</mark> | |
| Coupling Nut Material & Pla | ating Brass, Nickel | | |
| Coupling Nut Plating Spec. | 100 µin minimum | | |
| Hex Size | 5/16 inch | | |
| Torque | 3 in-lbs 0.34 Nm | | |
| | | | |

Environmental Specifications

Temperature Operating Range

-40 to +80 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

• Values at 25°C, sea level.

How to Order

Part Number Configuration:

FMCA2714 - xx



uu

Example: FMCA2714-12 = 12 inches long cable FMCA2714-100cm = 100 cm long cable

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689






SMA Male Right Angle to BNC Female Bulkhead Cable in 150 CM Length Using RG223 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SMA Male Right Angle to BNC Female Bulkhead Cable in 150 CM Length Using RG223 Coax FMCA2714-150CM


URL: https://www.fairviewmicrowave.com/ra-sma-male-to-bnc-female-bulkhead-cable-rg223-coax-in-150-cm-and-rohs-fmca2714-150cm-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



an INFINIT[©] brand



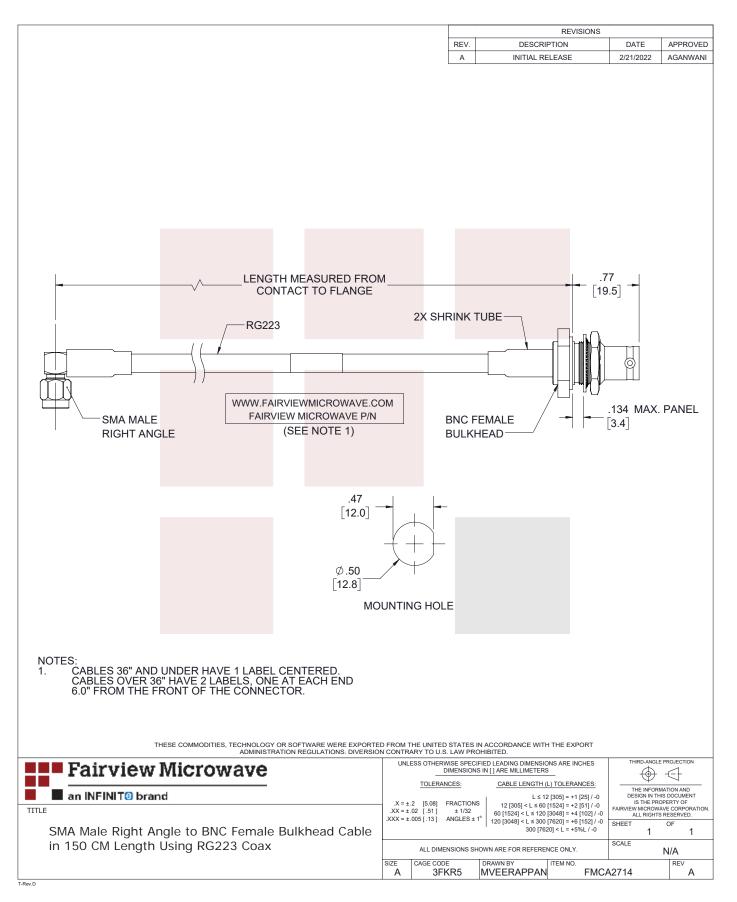

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689