

## SBPF-1000-2000-05-N DATA SHEET

# Tunable Band Pass Filter With N Female Connectors From 1 GHz to 2 GHz With a 5% Bandwidth

Fairview Microwave's hand-tunable RF filters are commonly used in lab environments for testing many frequency bands including PCS, UHF, PMR, Tetra, LTE, and WiFi. The tunable band pass filters and band reject filters, also known as band-stop filters or band-rejection filters, are effective in band selection or frequency discrimination with high attenuation greater than 50 dB possible, allowing for excellent noise, harmonic and adjacent-band reduction. Each of the new bandpass filters and band reject filters from Fairview are rated to 50 Watts power handling and are designed with N female connectors. Fairview's all new family of tunable RF filters are available from stock and can ship same-day.

#### **Features:**

- Design: Tunable Filter
- Connector 1: N Female
- Connector 2: N Female

#### **Electrical Specifications\***

Min	Тур	Max	Units	
1		2	GHz	
	5		%	
	2.2:1			
	3.5:1			
1			%	
		1.5:1		
		1	dB	
	50		Ohms	
		50	Watts	
	Min 1 1	1 5 2.2:1 3.5:1 1	1 2 5 5 2.2:1 3.5:1 1 1.5:1 1 50	

<sup>\*</sup> Values at 25°C, sea level

**Mechanical Specifications** 

**Temperature**Operating Range
Storage Range

-55 to +85 deg C -55 to +125 deg C

**Size** Length Width Height

7.38 in 187.45 mm 2.88 in 73.15 mm 2.75 in 69.85 mm

#### **Connectors**

Description	Connector 1	Connector 2			
Туре	N Female	N Female			

**Compliance Certifications** (visit www.FairviewMicrowave.com for current document)

#### Plotted and Other Data

Notes:

• Values at 25 °C, sea level


Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com



### **Swept Data**

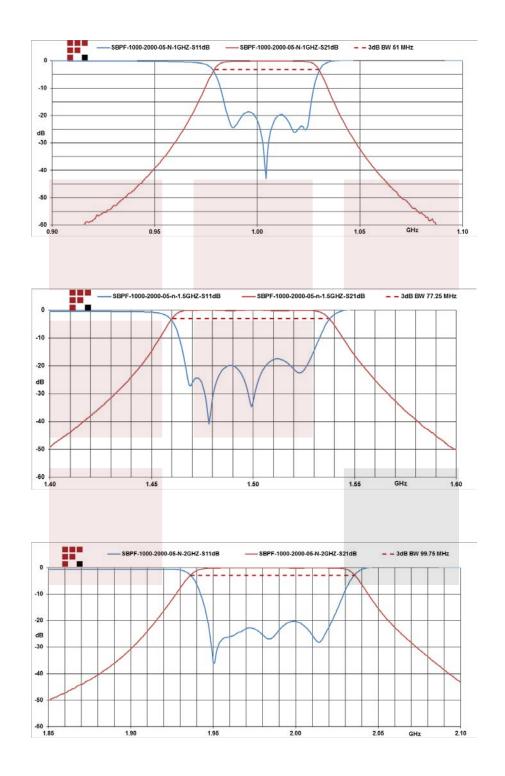



## SBPF-1000-2000-05-N **DATA SHEET**

Tunable Band Pass Filter With N Female Connectors From 1 GHz to 2 GHz With a 5% Bandwidth from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Tunable Band Pass Filter With N Female Connectors From 1 GHz to 2 GHz With a 5% Bandwidth SBPF-1000-2000-05-N


URL: http://www.fairviewmicrowave.com/tunable-band-pass-filter-n-female-1000mhz-2ghz-sbpf-1000-2000-05-n-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

to implem	ent improvemer	ıts. Fairview	/ Microw	ave reserves	s the righ	t to mak	e such	changes	as req	uired.	Unles	s oth	nerwise
stated, all	specifications a	re nominal.	Fairvie	w Microwave	e does no	ot make	any re	presentat	ion or	warrar	nty re	gardi	ing the
suitability	of the part desc	cribed hereir	for any	y particular	purpose,	and Fair	view N	1icrowave	does	not ass	sume .	any I	liability
arising ou	t of the use of a	ny part or do	ocument	tation.									



## SBPF-1000-2000-05-N DATA SHEET

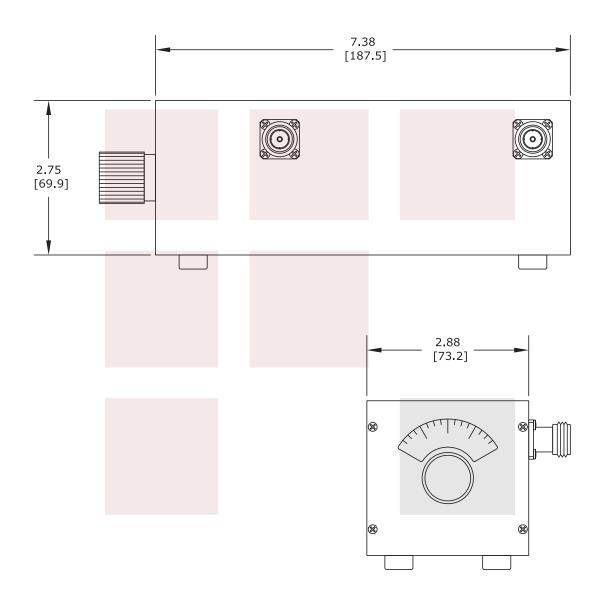

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].					
Tunable Band Pass Filter With N Female Connectors From 1 GHz to 2 GHz With a 5% Bandwidth	SBPF-1000-2000-05-N			CAGE CODE 3FKR5		
	CAD FILE 050814	SHEET	SCALE N/A	SIZE A	2233	