

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-3 GHZ
 VSWR @ 3GHZ : 1.15 MAX
 POWER (AVG) 2 WATTS
 POWER (PEAK) 250 WATTS
 IMPEDANCE: 50 OHMS
 ATTENUATION ACCURACY
 GREATER OF +/- 0.3 DB OR 3%
 VSWR: 1.15 MAX


MECHANICAL:

MATERIAL BODY: BRASS
 PLATING: TRI-METAL (TIN-ZINC-COPPER)
 MATERIAL RING & CONTACTS: BeCu
 CENTER CONTACT: GOLD PLATED OVER NICKEL
 RESISTIVE ELEMENT: AINi SUBSTRATE T Ni RESISTOR

ENVIRONMENTAL:

TEMP: -55 C TO +135 C

ROHS COMPLIANT

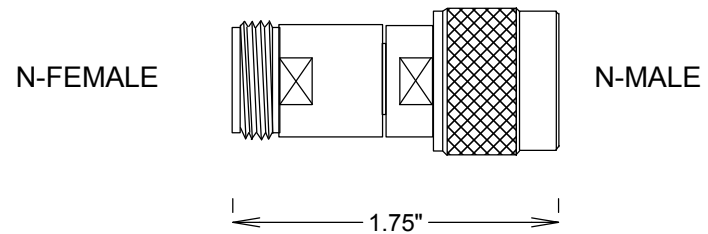

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
TITLE ATTENUATORS N M/F 3GHZ			
SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SA3NS-XX	A
SCALE		SHEET	