

# SMA M/F 6 GHZ 5 WATT ATTENUATORS

SA6S5W-XX

## SPECIFICATIONS

### ELECTRICAL:

FREQUENCY: 0-6 GHZ  
 VSWR 1.2:1 MAX  
 POWER (AVG) 5 WATTS @ 25 DEG C  
 POWER (PEAK) 500 WATTS  
 IMPEDANCE: 50 OHMS  
 ATTENUATION ACCURACY:

1-20 dB	±.5dB
21-30 dB	±.75 dB


### MECHANICAL:

MATERIAL CONNECTORS: PASSIVATED STAINLESS STEEL  
 MATERIAL CONTACTS: BeCu  
 CONTACT PLATING: Au PER MIL-G-45204

### ENVIRONMENTAL:

TEMP: -55° C TO +125° C

ROHS COMPLIANT

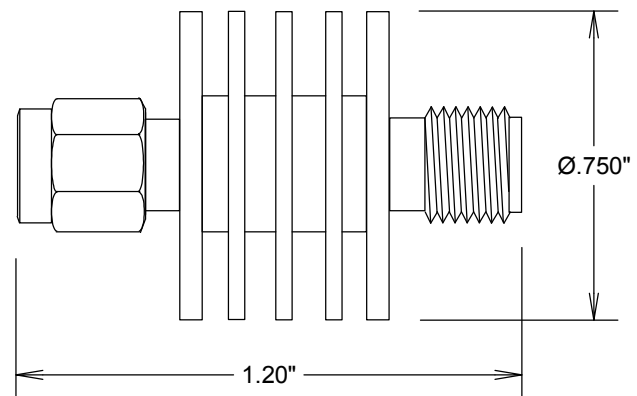

				<b>FAIRVIEW MICROWAVE INC.</b>	
				ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	
				TITLE	
				<b>SMA M/F 6 GHZ 5 WATT ATTENUATORS</b>	
SIZE	CAGE CODE	DWG NO	REV		
<b>A</b>	<b>3FKR5</b>	<b>SA6S5W-XX</b>	<b>A</b>		
SCALE				SHEET	