

SMA/F-TNC/F BULKHEAD ADAPTER HERMETIC

SM4745

SPECIFICATIONS


ELECTRICAL

FREQUENCY: 0-12.4 GHZ
 VSWR: 1.25:1 MAX
 IMPEDANCE: 50 OHMS

MECHANICAL

MATERIALS BODY PASSIVATED S. STEEL
 MATERIALS CONTACTS BeCu
 CONTACT PLATING: Au MIL-G-45204
 INTERFACE: MIL-STD-348B
 INSULATOR: TEFLON
 DURABILITY: 500 CYCLES MIN
 TEMPERATURE: -55 TO +125° C
 ROHS COMPLIANT

HERMETIC

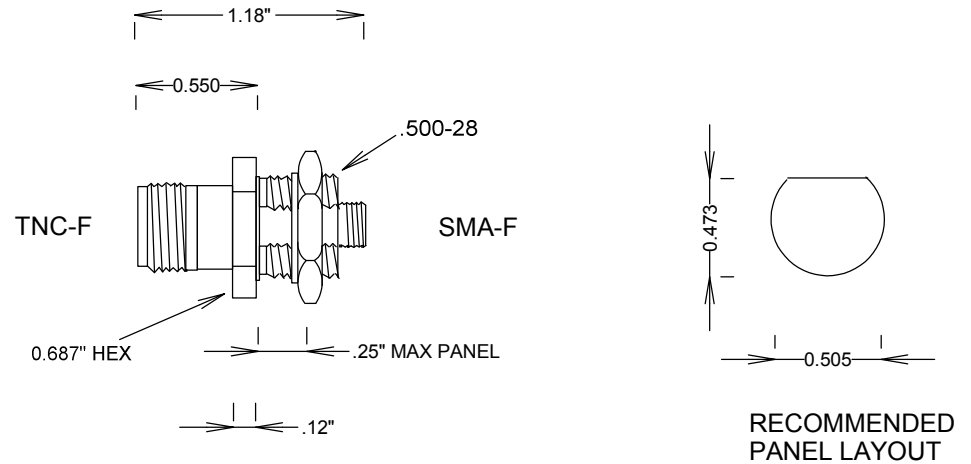

				FAIRVIEW MICROWAVE INC.			
				ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
				TITLE			
				SMA/F-TNC/F BULKHEAD ADAPTER HERMETIC			
SIZE		CAGE CODE		DWG NO		REV	
A		3FKR5		SM4745		--	
SCALE				SHEET			