

SMA F/F BULKHEAD ADAPTER 18GHZ w ORING

SM4913, SM4914

SPECIFICATIONS

ELECTRICAL
 50 OHMS
 VSWR 1.15:1 MAX @ 18 GHZ
 FREQUENCY: 0-18 GHZ


MECHANICAL
 500 CYCLES MIN
 7-9 LBS COUPLING NUT MATING TORQUE

ENVIRONMENTAL
 -55°C TO +110°C
 CORROSION: MIL-STD 202
 VIBRATION: MIL-STD 202

MATERIALS
 BODY SM4914 AU PLATED STAINLESS STEEL
 BODY SM4913 PASSIVATED STAINLESS STEEL
 CONTACTS: BeCu ATSM-B-196
 CENTER CONTACTS Au PLATED MIL-G-45204
 INSULATOR: TEFLON
 ORING: SILICONE RUBBER

INTERFACE: MIL-STD-348B

ROHS COMPLIANT

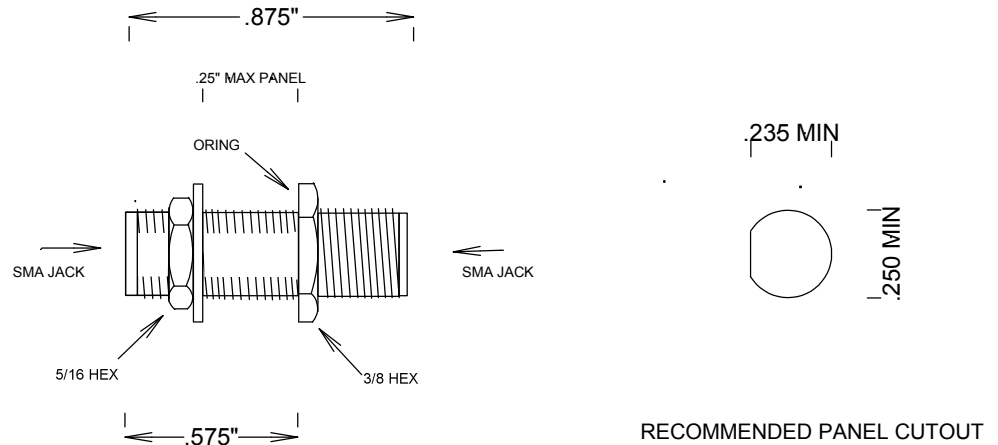

LOCKWASHER, ORING, GASKET SUPPLIED

SM4914 AU PLATED
 SM4913 PASSIVATED

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**SMA F/F BULKHEAD ADAPTER
 18GHZ w ORING**

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM4913, SM4914	--

SCALE SHEET