

SMA-SMA ADAPTERS 27GHZ

SM4952, SM4962, SM4972

SPECIFICATIONS




ELECTRICAL
 50 OHMS
 VSWR 1.20:1 MAX @ 27 GHZ
 FREQUENCY: 0-27 GHZ

MECHANICAL
 500 CYCLES MIN
 RECOMMENDED TORQUE: 7-9 IN-LBS
 INTERFACE: MIL-STD-348A

ENVIRONMENTAL
 -65 DEG C TO +100 DEG C
 CORROSION: MIL-STD 202
 VIBRATION: MIL-STD 202

MATERIALS
 BODY PASSIVATED STAINLESS STEEL
 CONTACTS: BeCu
 CONTACT PLATING: Au MIL-G-45204

ROHS COMPLIANT

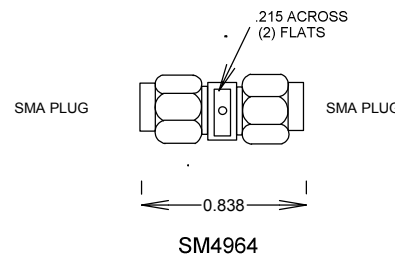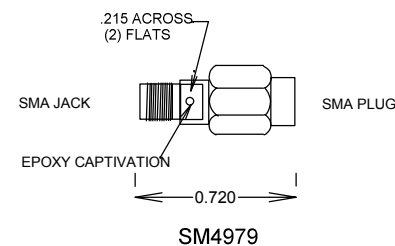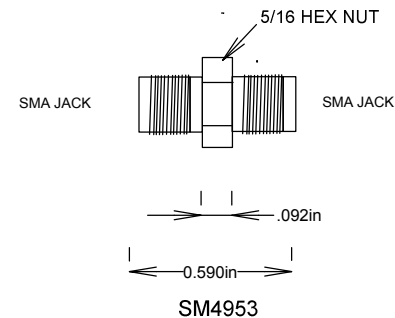

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA ADAPTERS 27GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM4953, SM4964, SM4979	A
SCALE			SHEET