

POWER DIVIDER N 800-2500MHZ 3-WAY

SMP8753


SPECIFICATIONS

ELECTRICAL

FREQUENCY: 800-2500 MHZ
 ISOLATION: 20 DB MIN
 POWER: 5 W AVG
 IMPEDANCE: 50 OHMS
 VSWR: 1.30:1 MAX , ALL PORTS
 AMPLITUDE BALANCE: 0.5DB
 LOSS: 5.3 DB (4.8+.5)

MECHANICAL

MATERIALS BODY: PASSIVATED ALUMINUM
 CONNECTORS: N-FEMALE, NICKEL PLATING
 TEMP RANGE: -40 TO +85 DEG C
 WEIGHT: 12.5 oz

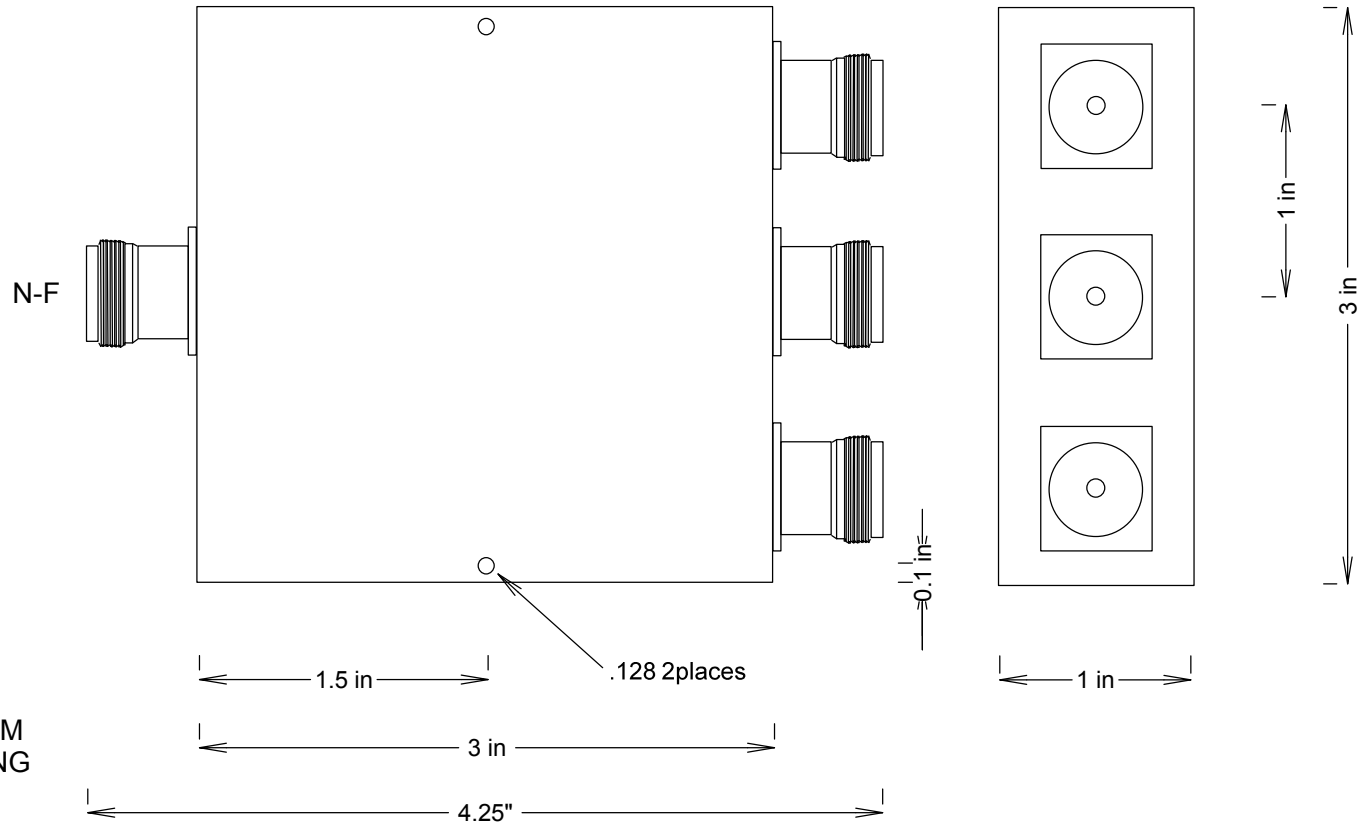

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

POWER DIVIDER N 800-2500MHZ 3-WAY

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SMP8753	
SCALE		SHEET	