
A.GANWAN	03/31/2022	INITIAL RELEASE	Α
APPROVED	DATE	DESCRIPTION	REV.
		REVISIONS	

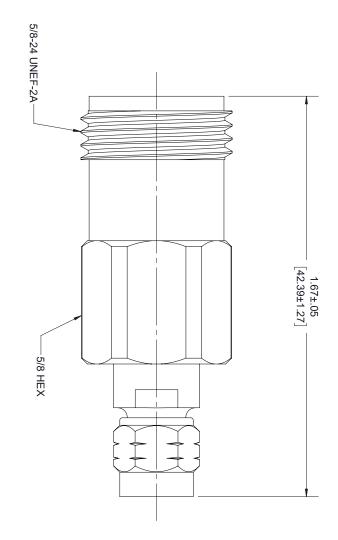

N FEMALE

1.85mm MALE

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORTE ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

** Microwave*

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS.



TITLE

▶	CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = +1 [25] / 12 [305] < L ≤ 60 [1524] = +2 [51] / 60 [1524] < L ≤ 120 [3048] = +4 [102] /	CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = +1 [25] - 0 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION ALL RIGHTS RESERVED.	TION AND DOCUMENT IRTY OF ICORPORATION. ISERVED.
05[.13] ANGLES±1°	120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5%L / -0	L ≤ 300 [7620] = +6 [152]/-0 300 [7620] < L = +5%L/-0	SHEET 1	9F 1
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	WN ARE FOR REFEREI	NCE ONLY.	N SCALE	N/A
CAGE CODE 1	DRAWN BY	ITEM NO.		REV
3FKR5	K.GLEBOVA	FMAD1329)1329	Þ

X = ±.2 [5.08] FRACTIONS XX = ±.02 [.51] ± 1/32 XXX = ±.005[.13] ANGLES ± 1°

A

CAGE CODE 3FKR5