


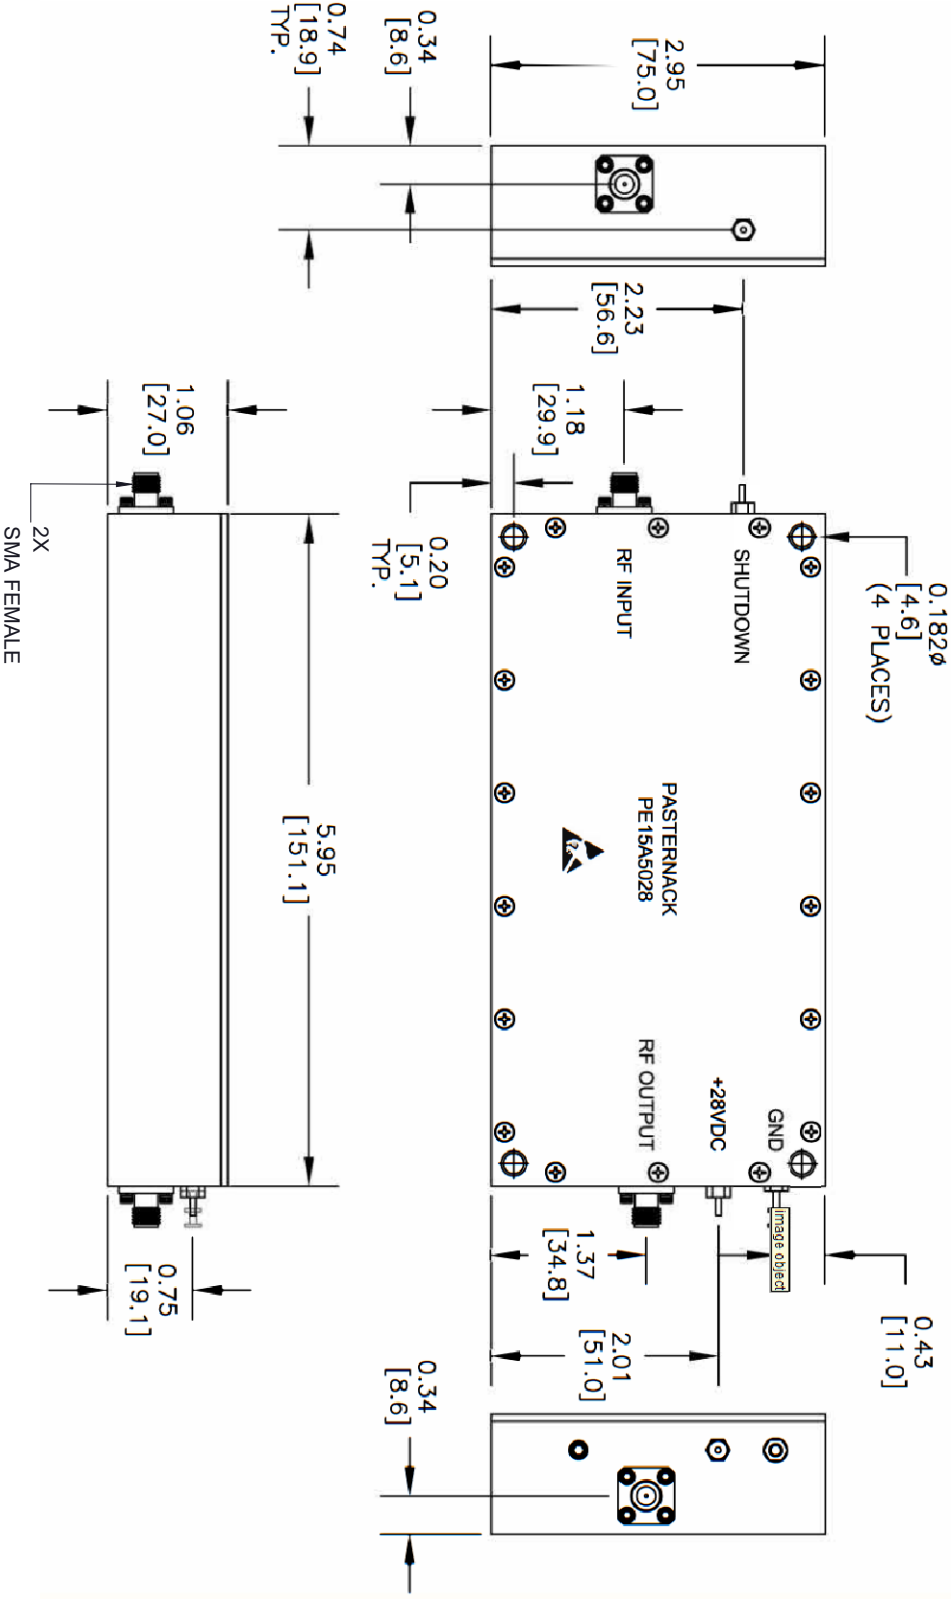

NOTES:

- HEAT SINK REQUIRED FOR PROPER OPERATION, UNIT IS COOLED BY CONDUCTING TO HEAT SINK.
- USE A MANUAL TOGGLE SWITCH WITH AN OPEN ON ONE END AND SHORT ON THE OTHER END.
- ONCE THE PIN IS SHORTED OUT, THE AMPLIFIER WILL SHUT DOWN.
- TTL METHOD: USE A DARLINGTON TRANSISTOR (DARLINGTON PAIR) THAT IS CONNECTED TO A TTL OF YOUR CHOICE WITH AN OPEN AND SHORT PORT. WHEN TTL GOES HIGH (5V), THE UNIT WILL SHUT DOWN.

STANDARD TOLERANCES

.X ± 0.2
.XX ± 0.01
.XXX ± 0.005

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE				NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
DWG NO		CAGE CODE					
FMAM5028F		3FKR5					
CAD FILE	120517	SHEET	1 OF 1	SCALE	N/A	SIZE	A
				7361			