REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	ECO-12621	10/23/2023	KGLEBOVA	SRAUTUS

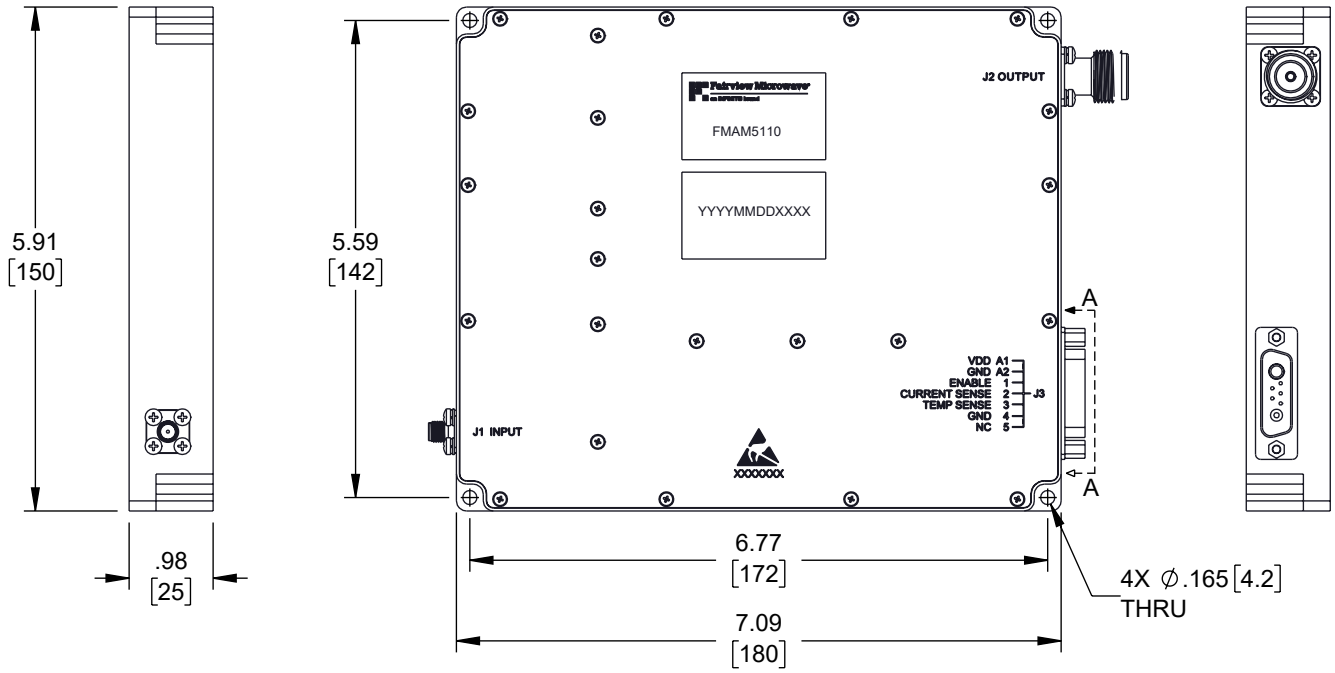

HYBRID D-SUB 7-PIN, MALE		
PIN #	DESCRIPTION	SPECIFICATIONS
A1	VDD	32 VDC
A2	GND	GROUND
1	ENABLE	AMPLIFIER ENABLE: TTL LOGIC HIGH (3.3V) (INTERNALLY PULLED-LOW)
2	CURRENT SENSE	ANALOG VOLTAGE RELATIVE TO IDD @ 100MV PER AMPERE
3	TEMP SENSE	ANALOG VOLTAGE RELATIVE TO MODULE'S TEMPERATURE @ 10 MV/°C
4	GND	GROUND
5	NC	NO CONNECTION



VIEW A-A

NOTES:

1. ADEQUATE HEATSINK REQUIRED.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5] | FRACTIONS ± 1/32
.XX = ±.02 [0.5] | ANGLES ± 1°
.XXX = ±.005 [0.13]

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

Fairview Microwave
an INFINITE brand
Website: www.FairviewMicrowave.com
Phone: 1.800.715.4396 | 1.972.649.6678

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION
53 DB GAIN, 200 WATT PSAT, 20 MHZ TO 520 MHZ, HIGH POWER LDMOS AMPLIFIER, SMA, CLASS AB

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3FKR5	BPUCHASKI	FMAM5110	B