

RA BNC Male to RA BNC Male Cable RG-316 Coax




FMCA10012

Configuration

- Connector 1: BNC Male Right Angle
- Connector 2: BNC Male Right Angle
- Cable Type: RG-316
- Coax Cable Group: 8
- Coax Flex Type: Flexible

Features

- Max Frequency 2 GHz
- 69% Phase Velocity
- FEP Jacket

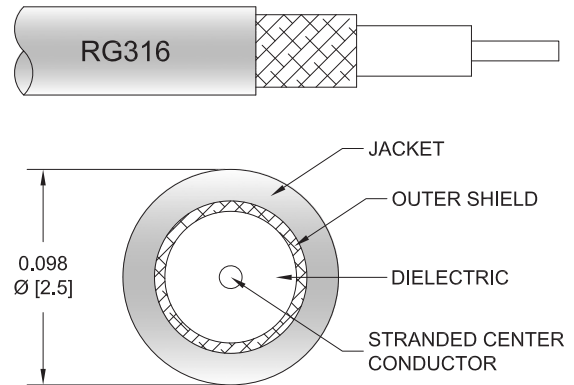

Applications

- General Purpose
- Laboratory Use

Description

The RA BNC male to RA BNC male cable using RG-316 coax, part number FMCA10012, from Fairview Microwave is in-stock and ships same day. This Fairview BNC to BNC cable assembly has a male to male gender configuration with 50 ohm flexible RG-316 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA10012 BNC male to BNC male cable assembly operates to 2 GHz. The right angle BNC interfaces on the RG-316 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			335	Vrms
Jacket Spark			2,000	Vrms

Specifications by Frequency

RA BNC Male to RA BNC Male Cable RG-316 Coax



FMCA10012

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency	50	100	250	500	2000	
FMCA10012	Custom Lengths Available	Insertion Loss (Typ.)	0.08	0.11	0.16	0.238	0.48	dB/ft	
			0.25	0.37	0.53	0.79	1.58	dB/m	
FMCA10012-12	12 inch	Insertion Loss (Typ.)	0.48	0.51	0.56	0.64	0.88	dB	0.114
FMCA10012-24	24 inch	Insertion Loss (Typ.)	0.55	0.62	0.72	0.88	1.36	dB	0.125
FMCA10012-36	36 inch	Insertion Loss (Typ.)	0.63	0.73	0.88	1.12	1.84	dB	0.135
FMCA10012-48	48 inch	Insertion Loss (Typ.)	0.7	0.84	1.04	1.36	2.32	dB	0.145
FMCA10012-72	72 inch	Insertion Loss (Typ.)	0.85	1.06	1.36	1.83	3.28	dB	0.165

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB
 Loss due to Connector 2: 0.2 dB
 Base Weight: 0.114 pounds
 Additional Weight per Inch: 0.00084 pounds

Mechanical Specifications

Cable Assembly

Weight 0.114 lbs [51.71 g]

Cable

Cable Type RG-316
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Shield Layer 1 Silver Plated Copper Braid
 Jacket Material FEP, Tan
 Jacket Diameter 0.102 in [2.59 mm]

RA BNC Male to RA BNC Male Cable RG-316 Coax



FMCA10012

Connectors

Description	Connector 1	Connector 2
Type	BNC Male Right Angle	BNC Male Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100 µin minimum

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

RA BNC Male to RA BNC Male Cable RG-316 Coax



FMCA10012

Typical Performance Data

How to Order

Part Number Configuration: **FMCA10012** - **xx** **uu**

_____ Unit of Measure:
 cm = Centimeters
 <blank> = Inches
 _____ Length
 _____ Base Number

Example: FMCA10012-12 = 12 inches long cable
 FMCA10012-100cm = 100 cm long cable

RA BNC Male to RA BNC Male Cable RG-316 Coax from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [RA BNC Male to RA BNC Male Cable RG-316 Coax FMCA10012](#)

URL: <https://www.fairviewmicrowave.com/ra-bnc-male-to-ra-bnc-male-cable-rg-316-coax-fmca10012-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMCA10012 CAD Drawing

RA BNC Male to RA BNC Male Cable RG-316 Coax

