

## Low Loss RA N Male to SMA Male Cable TCOM-195 Coax With Times Microwave Components




### FMCA100138

#### Configuration

- Connector 1: N Male Right Angle
- Connector 2: SMA Male
- Cable Type: TCOM-195
- Coax Flex Type: Flexible

#### Features

- Max Frequency 6 GHz
- 80% Phase Velocity
- Triple Shielded
- PE Jacket

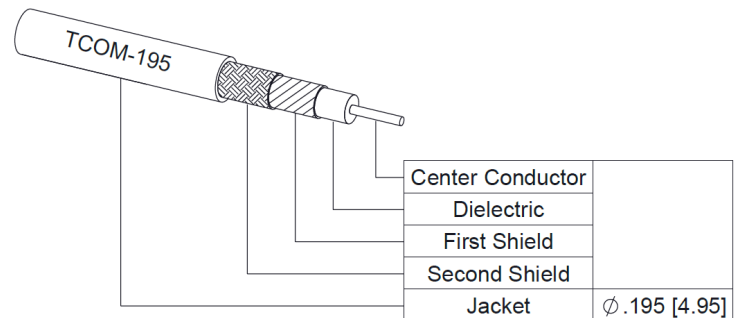

#### Applications

- General Purpose
- Laboratory Use

#### Description

The RA type N male to SMA male cable using TCOM-195 coax, part number FMCA100138, from Fairview Microwave is in-stock and ships same day. This Fairview type N to SMA cable assembly has a male to male gender configuration with 50 ohm flexible TCOM-195 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA100138 type N male to SMA male cable assembly operates to 6 GHz. The right angle type N interface on the TCOM-195 cable allows for easier connections in tight spaces. The triple shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		80		%
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		7.16 [23.49]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		3.42 [11.22]		Ohms/1000ft [Ohms/Km]
Jacket Spark			3,000	Vrms

#### Specifications by Frequency

Low Loss RA N Male to SMA Male Cable  
TCOM-195 Coax With Times Microwave Components



**FMCA100138**

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency		250	500	1000		
FMCA100138	Custom Lengths Available	Insertion Loss (Typ.)	0.036	0.073	0.106	0.172	0.271	dB/ft	
			0.12	0.24	0.35	0.57	0.89	dB/m	
FMCA100138-12	12 inch	Insertion Loss (Typ.)	0.34	0.38	0.41	0.48	0.58	dB	0.147
FMCA100138-24	24 inch	Insertion Loss (Typ.)	0.38	0.45	0.52	0.65	0.85	dB	0.182
FMCA100138-36	36 inch	Insertion Loss (Typ.)	0.41	0.52	0.62	0.82	1.12	dB	0.217
FMCA100138-48	48 inch	Insertion Loss (Typ.)	0.45	0.6	0.73	0.99	1.39	dB	0.252
FMCA100138-60	60 inch	Insertion Loss (Typ.)	0.48	0.67	0.83	1.16	1.66	dB	0.287

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB  
 Loss due to Connector 2: 0.1 dB  
 Base Weight: 0.147 pounds  
 Additional Weight per Inch: 0.00291 pounds

**Mechanical Specifications**

**Cable Assembly**

Width/Diameter 0.5 in [12.7 mm]  
 Weight 0.147 lbs [66.68 g]

**Cable**

Cable Type TCOM-195  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper  
 Dielectric Type PE (F)  
 Number of Shields 3  
 Shield Layer 1 Silver Plated Copper Braid  
 Shield Layer 2 Tinned Copper Braid  
 Jacket Material PE, Black  
 Jacket Diameter 0.195 in [4.95 mm]  
 One Time Minimum Bend Radius 0.5 in [12.7 mm]  
 Repeated Minimum Bend Radius 2 in [50.8 mm]  
 Bending Moment 0.2 lbs-ft [0.27 N-m]  
 Flat Plate Crush 15 lbs/in [0.27 Kg/mm]

Low Loss RA N Male to SMA Male Cable  
TCOM-195 Coax With Times Microwave Components



**FMCA100138**

**Connectors**

Description	Connector 1	Connector 2
Type	N Male Right Angle	SMA Male
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Mating Cycles	500	
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50µ in. minimum	ASTM B488
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Tri-Metal	Passivated Stainless Steel
Body Plating Specification	80µ in. minimum	
Coupling Nut Material and Plating	Brass, Tri-Metal	Passivated Stainless Steel
Coupling Nut Plating Specification	80µ in. minimum	
Hex Size	30	5/16 Inch

**Environmental Specifications**

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Low Loss RA N Male to SMA Male Cable  
TCOM-195 Coax With Times Microwave Components



**FMCA100138**

**Typical Performance Data**

**How to Order**

Part Number Configuration:

**FMCA100138**

**- xx**

**uu**



Example: FMCA100138-12 = 12 inches long cable  
FMCA100138-100cm = 100 cm long cable

Low Loss RA N Male to SMA Male Cable TCOM-195 Coax With Times Microwave Components from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Low Loss RA N Male to SMA Male Cable TCOM-195 Coax With Times Microwave Components FMCA100138](#)

URL: <https://www.fairviewmicrowave.com/low-loss-ra-n-male-to-sma-male-cable-tcom-195-coax-with-times-microwave-components-fmca100138-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMCA100138 CAD Drawing

Low Loss RA N Male to SMA Male Cable TCOM-195 Coax With Times Microwave Components

