

NEX10 Male to NEX10 Male Right Angle Low PIM Cable 48 Inch Length Using TFT-5G-402 Coax Using Times Microwave Components

FMCA2354-48



Configuration

- Connector 1: NEX10 Male
- Connector 2: NEX10 Male Right Angle
- Cable Type: TFT-5G-402
- Coax Flex Type: Flexible

Features

- Max Frequency 4 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket

Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Indoor and Outdoor Use
- Plenum Rated Applications

Description

The NEX10 male to RA NEX10 male 48 inch cable using TFT-5G-402 coax, part number FMCA2354-48, from Fairview Microwave is in-stock and ships same day. This Fairview NEX10 to NEX10 cable assembly has a male to male gender configuration with 50 ohm flexible TFT-5G-402 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. Our low PIM design offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The FMCA2354-48 NEX10 male to NEX10 male cable assembly operates to 4 GHz. The right angle NEX10 interface on the TFT-5G-402 cable allows for easier connections in tight spaces. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	80			dB
Passive Intermodulation			-160	dBc
IM3 (2x43dBm Tones) at 850 MHz or 1900 MHz				

NEX10 Male to NEX10 Male Right Angle Low PIM
Cable 48 Inch Length Using TFT-5G-402 Coax Using
Times Microwave Components

FMCA2354-48



Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Capacitance		26.7 [87.6]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Typ.)	0.19	0.3	0.47	0.68	1.4	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1*SQRT(FGHz) dB per connector.

Mechanical Specifications

Cable Assembly

Width/Diameter 0.472 in [11.99 mm]

Cable

Cable Type TFT-5G-402
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper
Dielectric Type PTFE
Number of Shields 2
Jacket Material FEP, Blue
Jacket Diameter 0.16 in [4.06 mm]
One Time Minimum Bend Radius 0.75 in [19.05 mm]

NEX10 Male to NEX10 Male Right Angle Low PIM
Cable 48 Inch Length Using TFT-5G-402 Coax Using
Times Microwave Components

FMCA2354-48



Connectors

Description	Connector 1	Connector 2
Type	NEX10 Male	NEX10 Male Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Mating Cycles	100	500
Contact Material and Plating	Brass, Silver	Brass, Silver
Contact Plating Specification	100 µin	200 µin
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Silver	Brass, Tri-Metal
Body Plating Specification	100 µin	100 µin
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	100 µin	100 µin
Torque	9 in-lbs 1.02 Nm	13 in-lbs 1.47 Nm

Environmental Specifications

Operating Range Temperature -40 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

NEX10 Male to NEX10 Male Right Angle Low PIM Cable 48 Inch Length Using TFT-5G-402 Coax Using Times Microwave Components

FMCA2354-48



Typical Performance Data

How to Order

Part Number Configuration:

FMCA2354

- xx

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: FMCA2354-12 = 12 inches long cable
FMCA2354-100cm = 100 cm long cable

NEX10 Male to NEX10 Male Right Angle Low PIM Cable 48 Inch Length Using TFT-5G-402 Coax Using Times Microwave Components from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [NEX10 Male to NEX10 Male Right Angle Low PIM Cable 48 Inch Length Using TFT-5G-402 Coax Using Times Microwave Components FMCA2354-48](https://www.fairviewmicrowave.com/product/rf-cable-assemblies/low-pim-nex10-male-ra-nex10-male-cable-tft-5g-402-coax-fmca2354-48)


URL: <https://www.fairviewmicrowave.com/product/rf-cable-assemblies/low-pim-nex10-male-ra-nex10-male-cable-tft-5g-402-coax-fmca2354-48.html>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMCA2354-48 CAD Drawing

NEX10 Male to NEX10 Male Right Angle Low PIM Cable 48 Inch Length

Using TFT-5G-402 Coax Using Times Microwave Components

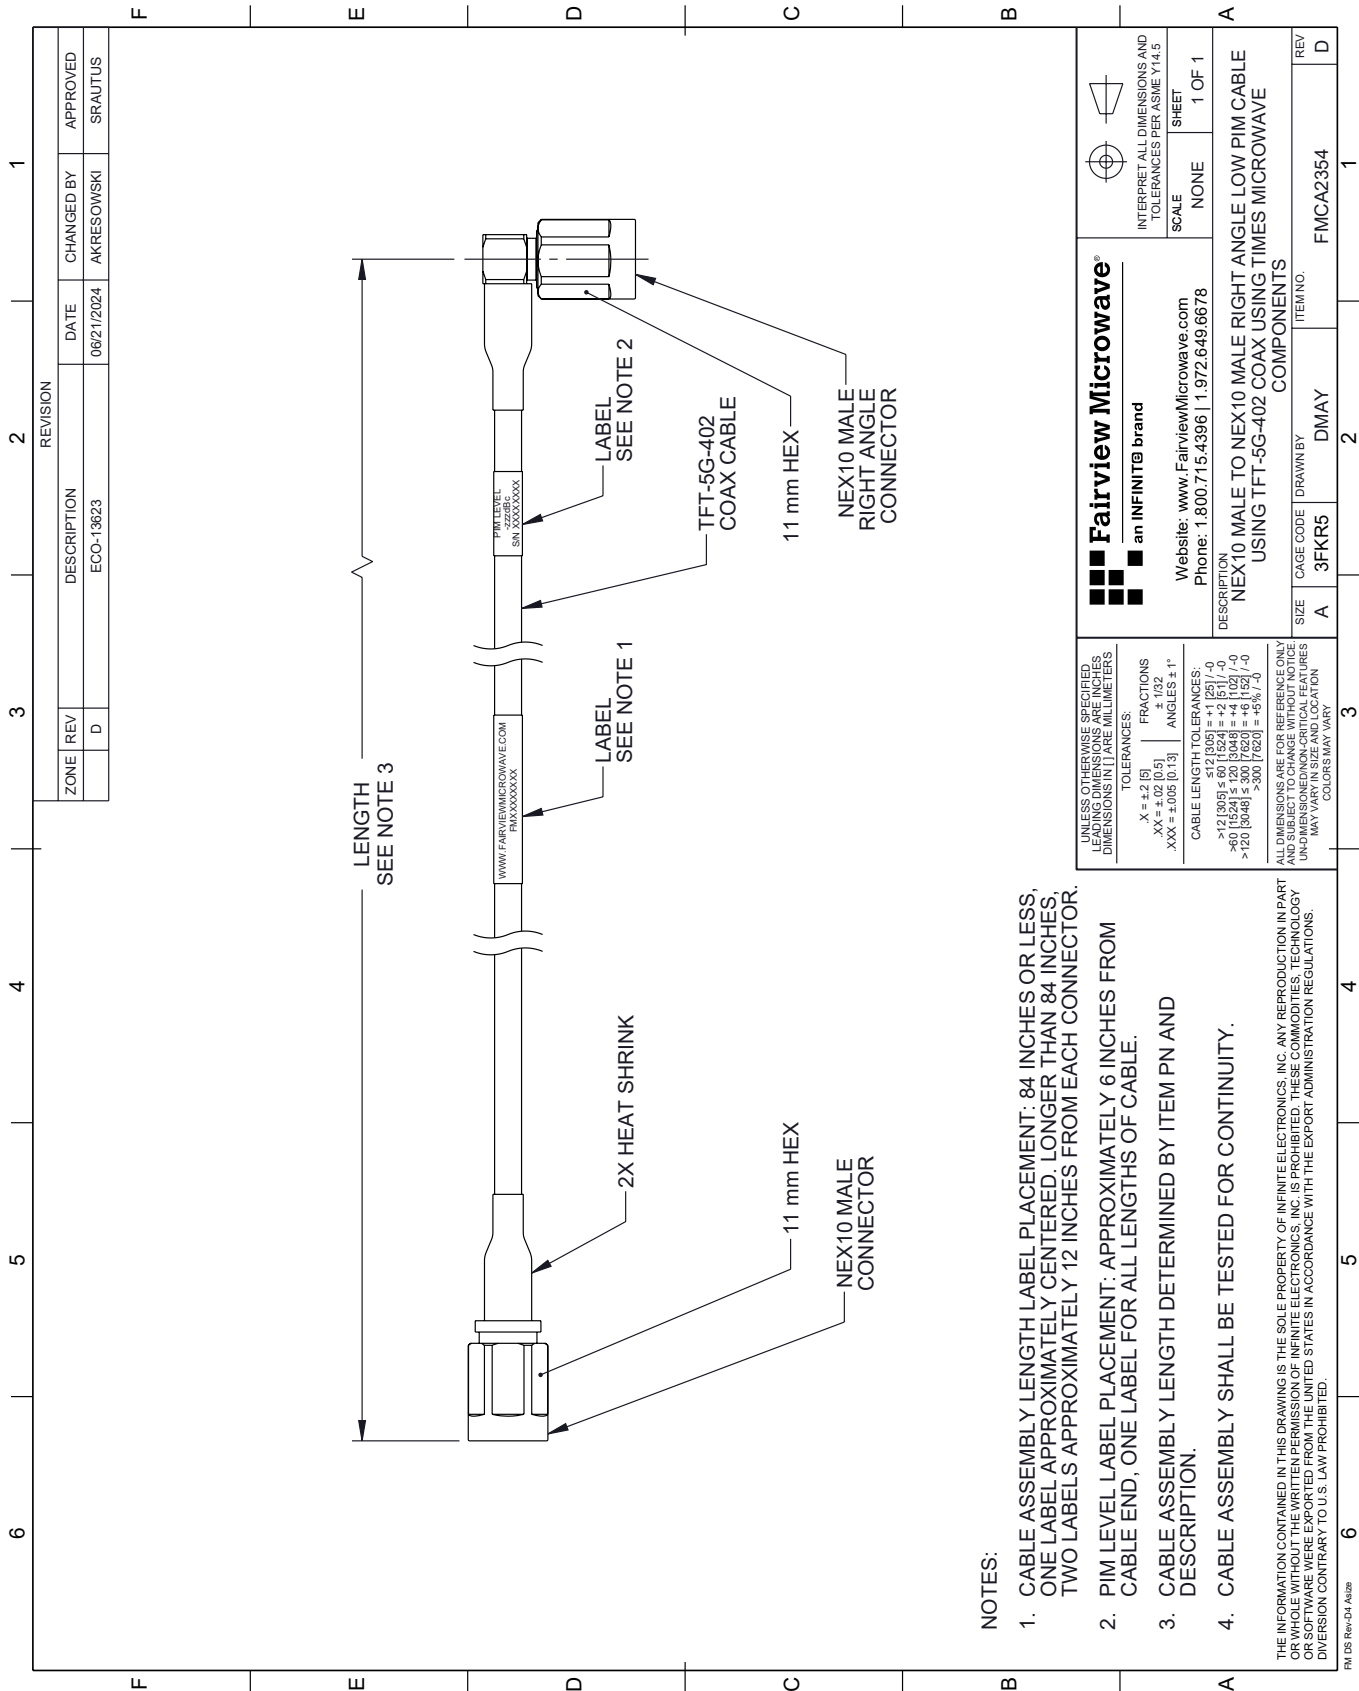

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 84 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED, LONGER THAN 84 INCHES, TWO LABELS APPROXIMATELY 12 INCHES FROM EACH CONNECTOR.
2. PIM LABEL PLACEMENT: APPROXIMATELY 6 INCHES FROM CABLE END, ONE LABEL FOR ALL LENGTHS OF CABLE.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.
4. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.