

Þ	REV.	
INITIAL RELEASE	DESCRIPTION	REVISIONS
06/22/2022	DATE	
SPONG	APPROVED	



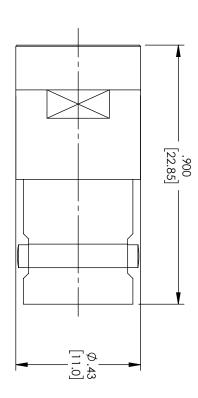

BNC(F)

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIME



TITLE

> SIZE		5	.X = ±.2 .XX = ±.02		
CAGE CODE	ALL DIN	.X=±.2 [5.08] .XX=±.02 [.51] .XX=±.05[.13]		TOLERANCES:	ı
ת ת	MENSIONS SHO	() () () () () () () () () ()	OLERANCES: X = ±.2 [5.08] FRACTIONS XX = ±.02 [5.1] ± 1/32 XXX = ±.005 [.13] ANGLES ± 1°		DIMENSIONS
DRAWN BY	ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	120 [3048] < L ≤ 300 300 [76;	12 [305] < L ≤ 60 60 [1524] < L ≤ 120	CABLE LENGTH (L) TOLERANCES	DIMENSIONS IN [] ARE MILLIMETERS
ITEM NO.		120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5%L / -0	L ≤ 12 [305] = +1 [25] / -0 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	L) TOLERANCES:	100
	SCALE N/A	SHEET 1 O	DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION ALL RIGHT'S RESERVED.	THE INFORMATION AND	\$
REV >	A	<u> </u>	OCUMENT RTY OF CORPORATION. SERVED.	ON A V	#