


LTR	DESCRIPTION	DATE	BY
-	Released	10/27/97	JCL

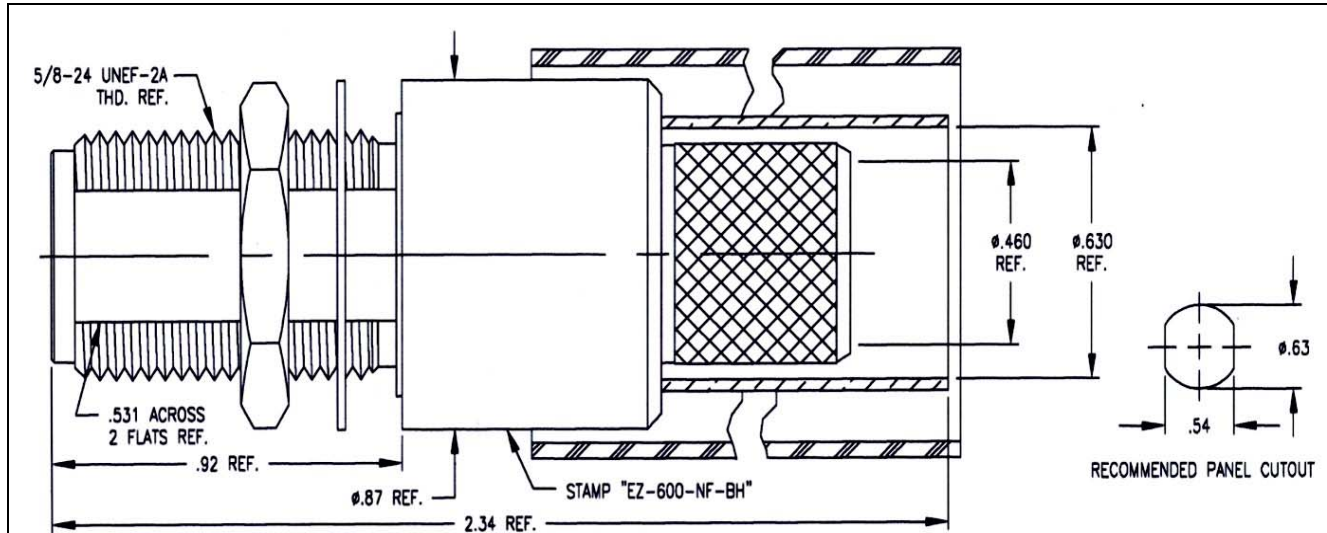

I. MATERIALS & FINISHES

center contact: Gold Plated Beryllium Copper (non-solder)
 outer contact: Silver Plated Brass
 body: Silver Plated Brass
 crimp sleeve: Silver Plated Copper
 lockwasher: Spring Steel
 hex nut:: Silver Plated Brass
 dielectric: Teflon® PTFE
 gasket: Silicone Rubber
 shrink sleeve: Adhesive Lined Polyolefin
 attachment: braid crimp

II. ELECTRICAL PROPERTIES

impedance: 50 ohms
 working voltage: 1000 vrms (max)
 vswr: 1.25:1 (max) up to 2.5 GHz
 insertion loss: $0.10 \times \sqrt{F_{ghz}}$

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals

Drawn	JCL	10/27/97



TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

EZ-600-NF-BH

Type-N female (jack) Bulkhead
 for LMR-600 Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-616
--------	-----------------	-----------------------


Scale: NA

Rev. (-)

Sheet: 1 of 1

NOTICE OF PROPRIETARY RIGHTS THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYSTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

SYM	REVISION DESCRIPTION	DFTM	DATE	APPD	DATE
A	RELEASED FOR PRODUCTION	D. J. H.	8/9/11	J. D. B.	8/16/11

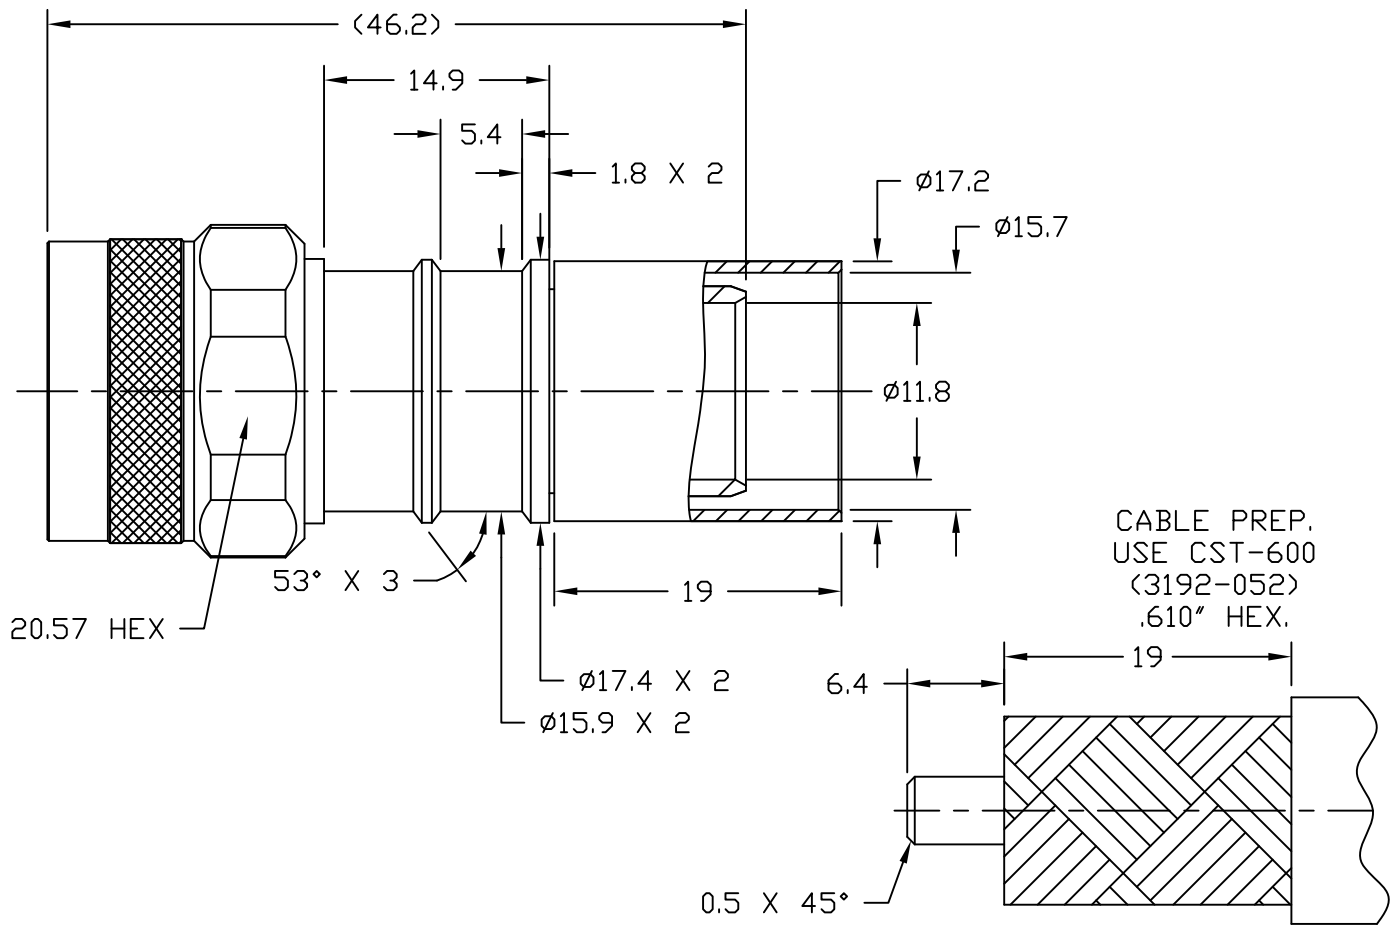

Reference standard IEC60169-16
I. Electric Performance
Impedance(Ω): 50
Frequency Range: DC-6GHz
VSWR: ≤ 1.25
Insert Loss: (dB) ≤ 0.1 (DC-3GHz)
Insulation resistance (M Ω) ≥ 5000
Proof voltage (V) 2500
Conductor resistance (m Ω)
outer conductor < 0.4
inner conductor < 0.8

II. Mechanical Performance
Nut torque 5N.m
(Nut) Whorl pull 500N
Tensile force (cable-connect) 500N
Torsion (cable-connect) 5N.m

III. Material and plating:

Component	Material
inner conductor	Brass
outer conductor	Brass
tube	Copper
nut	Brass
gasket	Silicone rubber
insulator	PTFE

Plating
Au50 micro inches over nickel 100 over copper
copper tin-zinc 100-150 micro inches
copper tin-zinc 100-150 micro inches
copper tin-zinc 100-150 micro inches

IV. Environment
Temp. range -55°C~+155°C
Weather standard IEC 60068 55 / 155/ 56
Thermal shock US MIL-STD 202,Meth.107,Cond.B
Vibration US MIL-STD 202,Meth.204,Cond.B
Shock US MIL-STD 202,Meth.213,Cond.I
Waterproofing standard IP67

V. Assembly: inner conductor installed and outer conductor crimped.

MATL:	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm MACHINED SURFACES FINISH N/A RMS MAX. REMOVE ALL BURRS N/A MAX. BREAK MACHINE CORNERS N/A MAX. FILLET R. TOLERANCES ON DECIMALS .XX $\pm$ N/A .XXX $\pm$ N/A ANGLES $\pm 1^\circ$ FRACTIONS $\pm$ N/A	DFTM. D. J. H.	TIMES MICROWAVE SYSTEMS		
		DATE 8/9/11			
USED ON: 0		CHKD. J. D. B.	EZ-600-NMH-X		
		DATE 8/16/11	"N" MALE FOR LMR-600 CABLE EZ/CRIMP/NO BRAID TRIM		
SCALE: N/A	DWG. SIZE A	APPD. J. D. B.			
		DATE 8/16/11			
DO NOT SCALE DRAWING	CODE IDENT 68999	DATE 8/16/11	1 of 1	SD3190-2627	REV A

TCOM-600 Low PIM Flexible Coax Cable Black PE Jacket

Times Microwave Systems Coax Cable Specification

TCOM-600 low PIM coax cable from Fairview Microwave is only one of many radio frequency coaxial cable types specifically stocked to be ready for quick shipment. Fairview Microwave's TCOM-600 coax cable is manufactured in a flexible design and has a 50 Ohm impedance. This flexible 50 Ohm coax cable is constructed with a polyethylene jacket of 0.59-inch diameter. The maximum passive intermodulation of this low PIM cable is -155 dBc.


Fairview Microwave's TCOM-600 flexible coax cable with a polyethylene jacket is rated for a 10 GHz maximum operating frequency. This 50 Ohm flexible coax cable is built with a shield count of 2 and RF shielding of 100 dB. Our low PIM RF coaxial cable has a solid conductor of copper clad aluminum. This black-colored coax RF cable has a typical insertion loss/maximum attenuation of 10.6 dB/100ft at a frequency of 10 GHz.

The TCOM-600 coax cable with foam PE dielectric can operate at temperatures ranging from -40 to 85 degrees C. Additional specifications for this TCOM-600 double-shielded RF coaxial cable are on our downloadable PDF datasheet above. This coaxial cable features a dual shield of tinned copper braid over the silver plated copper braid. Our low PIM coaxial cable has a dielectric withstanding voltage of 4000 Vdc.

TCOM-600 low PIM RF cable is part of more than one million RF, microwave, and millimeter wave parts in stock at Fairview Microwave. This TCOM-600 coax cable is ready to buy and can be shipped worldwide. Fairview Microwave also maintains a wide selection of other radio frequency coaxial cable types that ship the same day from our Allen, TX warehouse in the United States, as with the rest of our other RF/microwave and millimeter wave components.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		10	GHz
Impedance		50		Ohms
Velocity of Propagation		87		%
Time Delay		1.17 [3.84]		ns/ft [ns/m]
Shielding Effectiveness	100			dB
Passive Intermodulation			-155	dBc
DWV (DC)			4,000	Vdc
Jacket Spark			8,000	Vrms
Inner Conductor DC Resist.			0.53	Ohms/1000ft
Outer Conductor DC Resist.			1.52	Ohms/1000ft
Nominal Capacitance		23.4		pF/ft
		[76.77]		[pF/m]
Nominal Inductance		0.058		uH/ft
		[0.19]		[uH/m]
Input Power (Peak)			40	kWatts



Configuration:

- Low PIM Flexible Cable
- 2 Shield(s)

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Performance by Frequency Band

Description	F1	F2	F3	F4	F5	Units
Frequency	0.15	0.22	0.45	0.9	1.5	GHz
Attenuation, Typ	1 3.28	1.2 3.94	1.8 5.91	2.6 8.53	3.5 11.48	dB/100ft dB/100m
Power In (CW), Max	2,280	1,860	1,280	880	660	Watts

Description	F6	F7	F8	F9	F10	Units
Frequency	1.8	2	2.5	5.8	10	GHz
Attenuation, Typ	3.9 12.8	4.1 13.45	4.6 15.09	7.6 24.93	10.6 34.78	dB/100ft dB/100m
Power In (CW), Max	600	560	500	300	220	Watts

Mechanical Specifications

Diameter	0.59 in [14.99 mm]
Weight	0.137 lbs/ft [0.2 kg/m]
Min. Bend Radius (Installation)	1.5 in [38.1 mm]
Min. Bend Radius (Repeated)	6 in [152.4 mm]
Bending Moment	2.75 lbs-ft [3.73 N-m]
Tensile Strength	350 lbs [158.76 kg]
Flat Plate Crush	60 lbs/in [1.07 kg/mm]

Construction Specifications

Description	Material and Plating	Diameter
Inner Conductor	Copper Clad Aluminum, 1 Strands	0.176 in [4.47 mm]
Conductor Type	Solid	
Dielectric	PE (F)	0.455 in [11.56 mm]
First Shield	Silver Plated Copper Braid	0.465 in [11.81 mm]
Second Shield	Tinned Copper Braid	0.5 in [12.7 mm]
Jacket	PE, Black	0.59 in [14.99 mm]

Environmental Specifications
Temperature

Operating Range	-40 to +85 deg C
Installation Range	-40 to +85 deg C
Storage Range	-70 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

TCOM-600 Low PIM Flexible Coax Cable Black PE Jacket from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [TCOM-600 Low PIM Flexible Coax Cable Black PE Jacket TCOM-600](#)

URL: <https://www.fairviewmicrowave.com/tcom600-low-pim-flexible-coax-cable-pe-jacket-tcom-600-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

