

## Slide-On BMA Jack 2 Hole Flange to Slide-On BMA Jack 2 Hole Flange Cable Tinned Copper RG405 Type .086 Coax in 150 CM

The BMA jack slide-on 2 hole flange to BMA jack slide-on 2 hole flange 150 cm cable using Tinned Copper RG405 type .086 coax, part number FMCA3094-150CM, from Fairview Microwave is in-stock and ships same day. This Fairview BMA to BMA cable assembly has a jack to jack gender configuration with 50 ohm semi-rigid FM-SR086CUTN-STR coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. The FMCA3094-150CM BMA jack to BMA jack cable assembly operates to 22 GHz. Our RF cable assembly with BMA 2 hole flange interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

| Description     | Min | Typ | Max   | Units |
|-----------------|-----|-----|-------|-------|
| Frequency Range | DC  |     | 22    | GHz   |
| VSWR            |     |     | 1.5:1 |       |

### Performance by Frequency

| Description           | F1   | F2   | F3   | F4  | F5  | Units |
|-----------------------|------|------|------|-----|-----|-------|
| Frequency             | 1    | 2    | 4.5  | 9   | 22  | GHz   |
| Insertion Loss (Typ.) | 1.29 | 1.58 | 2.37 | 3.8 | 6.5 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length\* 59.06 in [150.01 cm]  
Weight 0.09 lbs [40.82 g]

#### Cable

Cable Type FM-SR086CUTN-STR  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 1  
Shield Layer 1 Tinned Copper

One Time Minimum Bend Radius 0.05 in [1.27 mm]



### Configuration:

- Slide-OnBMA Jack 2 Hole Flange
- Slide-OnBMA Jack 2 Hole Flange
- FM-SR086CUTN-STR

### Features:

- Max Frequency 22 GHz
- 1000 Mating Cycles

### Applications:

- General Purpose
- Laboratory Use

Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

## Connectors

| Description                   | Connector 1            | Connector 2            |
|-------------------------------|------------------------|------------------------|
| Type                          | BMA Jack               | BMA Jack               |
| Mount Method                  | 2 Hole Flange          | 2 Hole Flange          |
| Impedance                     | 50 Ohms                | 50 Ohms                |
| Connection Method             | Slide-On               | Slide-On               |
| Mating Cycles                 | 1,000                  | 1,000                  |
| Contact Material & Plating    | Beryllium Copper, Gold | Beryllium Copper, Gold |
| Contact Plating Spec.         | 51.18μ in. minimum     | 51.18μ in. minimum     |
| Dielectric Type               | PTFE                   | PTFE                   |
| Outer Cond Material & Plating | Beryllium Copper, Gold | Beryllium Copper, Gold |
| Body Material & Plating       | Stainless Steel, Gold  | Stainless Steel, Gold  |
| Body Plating Spec.            | 19.68μ in. minimum     | 19.68μ in. minimum     |

## Environmental Specifications

### Temperature

Operating Range -55 to +125 deg C

## Compliance Certifications (see [product page](#) for current document)

## Plotted and Other Data

Notes:

## How to Order

Part Number Configuration:

**FMCA3094 - xx uu**

cm = Centimeters  
 <blank> = Inches  
 Length

Example: FMCA3094-12 = 12 inches long cable  
 FMCA3094-100cm = 100 cm long cable


Slide-On BMA Jack 2 Hole Flange to Slide-On BMA Jack 2 Hole Flange Cable Tinned Copper RG405 Type .086 Coax in 150 CM from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [Slide-On BMA Jack 2 Hole Flange to Slide-On BMA Jack 2 Hole Flange Cable Tinned Copper RG405 Type .086 Coax in 150 CM FMCA3094-150CM](#)

URL: <https://www.fairviewmicrowave.com/slide-on-bma-jack-2-hole-flange-to-slide-on-bma-jack-2-hole-flange-cable-rg405-type-.086-coax-fmca3094-150cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

| REVISIONS |                 |          |          |
|-----------|-----------------|----------|----------|
| REV.      | DESCRIPTION     | DATE     | APPROVED |
| A         | INITIAL RELEASE | 07/18/22 | AGANWANI |

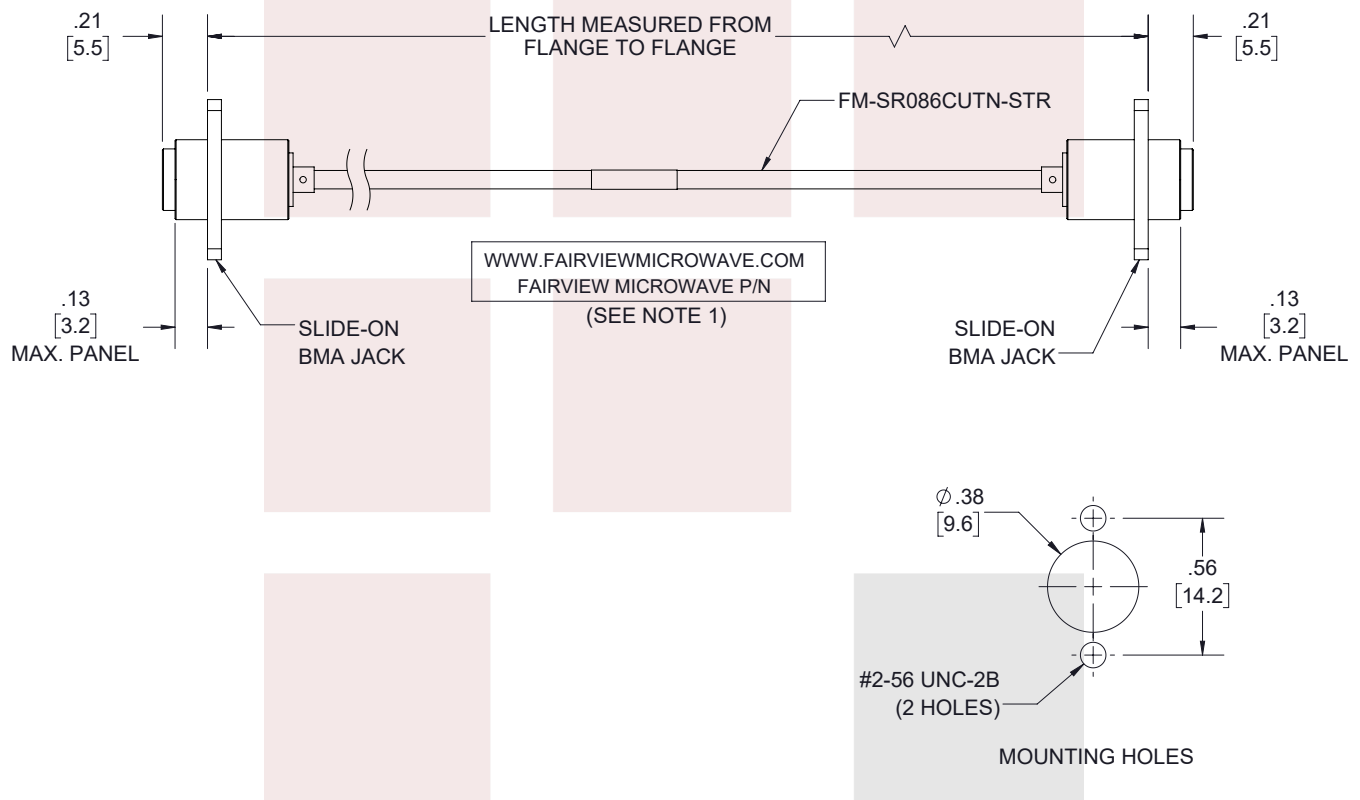

**NOTES:**

1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END 6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TITLE

Slide-On BMA Jack 2 Hole Flange to Slide-On BMA Jack 2 Hole Flange Cable Tinned Copper RG405 Type .086 Coax in 150 CM

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES: CABLE LENGTH (L) TOLERANCES:

|                         |                      |                                                    |
|-------------------------|----------------------|----------------------------------------------------|
| $X = \pm 2$ [5.08]      | FRACTIONS            | $L \leq 12$ [305] = +1 [25] / -0                   |
| $.XX = \pm 0.2$ [5.1]   | $\pm 1/32$           | $12$ [305] < $L \leq 60$ [1524] = +2 [51] / -0     |
| $.XXX = \pm 0.005$ [13] | ANGLES $\pm 1^\circ$ | $60$ [1524] < $L \leq 120$ [3048] = +4 [102] / -0  |
|                         |                      | $120$ [3048] < $L \leq 300$ [7620] = +6 [152] / -0 |
|                         |                      | $300$ [7620] < $L = +5\%L$ / -0                    |

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

| SIZE | CAGE CODE | DRAWN BY   | ITEM NO. | REV |
|------|-----------|------------|----------|-----|
| A    | 3FKR5     | VTHANGARAJ | FMCA3094 | A   |

THIRD-ANGLE PROJECTION



THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

T-Rev.D