

### **FM1WAN430-10NF**

#### **Features**

- 1.7 GHz to 2.6 GHz
- · WR-430 Waveguide Band
- · 10 dBi Nominal Gain

### **Applications**

- · Antenna Measurements
- · Wireless Communication
- · Laboratory Use
- · Microwave Radio Systems

- N Female Connector
- Ruggedized Aluminum Cage-Style Mount
- Integrates with Positioning Systems
- · Radome Testing
- Automotive Antenna Test Solutions
- Radar Cross Section
- · Satellite Antenna Testing

### Description

The FM1WAN430-10NF standard gain horn antenna with integrated cage-style mount (also known as waveguide horn) from Fairview Microwave is part of our comprehensive selection of waveguide antennas. The cage-style mount is a ruggedized aluminum mounting solution that integrates with test and measurement positioning systems, ensuring precise alignment and protection of the antenna. This standard gain horn is mated with a WR-430 to N Female waveguide to coaxial adapter and operates from 1.7 GHz to 2.6 GHz.

Our FM1WAN430-10NF standard gain horn antenna with integrated cage-style mount has a nominal gain of 10 dBi with a Horizontal and Vertical HPBW (Half Power Beam Width) of 52.10 and 51.60 degrees respectively. Fairview Microwave's N Female to WR-430 standard gain horns are available in 10, 15 and 20 dBi models with pyramidal shape and connectorized input.

Waveguide antennas, such as the FM1WAN430-10NF are used in a wide variety of applications due to the high-power handling capability, low loss, high directivity, and near constant electrical performance. Our WR-430 waveguide antennas with N Female interface is part of over 40,000 RF, microwave and millimeter wave components from Fairview Microwave available worldwide and ship same day.

WR-430

N Female

Linear

### Configuration

Design
Polarization
Coaxial Interface

### **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	1.7		2.6	GHz
Gain		10		
Horizontal Half Power Beam Width		52.1		Degrees
Vertical Half Power Beam Width	-	51.6		Degrees
Waveguide to Coaxial Adapter				
VSWR		1.3:1		
Input Power (Peak)			500	Watts

### **Mechanical Specifications**

Size

 Length
 15.748 in [400 mm]

 Width
 7.874 in [200 mm]





### **FM1WAN430-10NF**

Height 5.246 in [133.25 mm] Weight 3.9752 lbs [1.8 kg]

**RF Connector** 

Type N Female
Body Material and Plating Stainless Steel

**Waveguide Interface** 


Waveguide Size WR-430
Flange Type Square Cover
Flange Designation None
Body Material and Plating Aluminum

Compliance Certifications (see product page for current document)

### **Plotted and Other Data**


Notes:

### **Typical Performance Data**

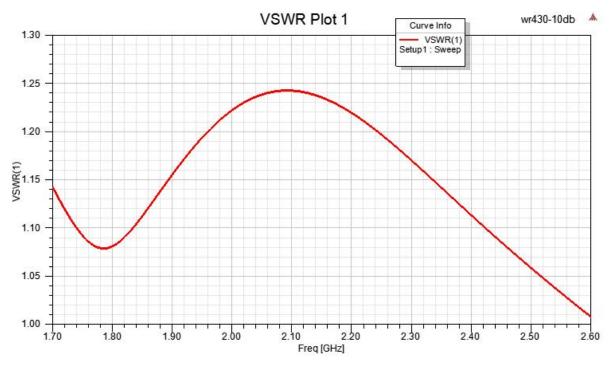




## **FM1WAN430-10NF**

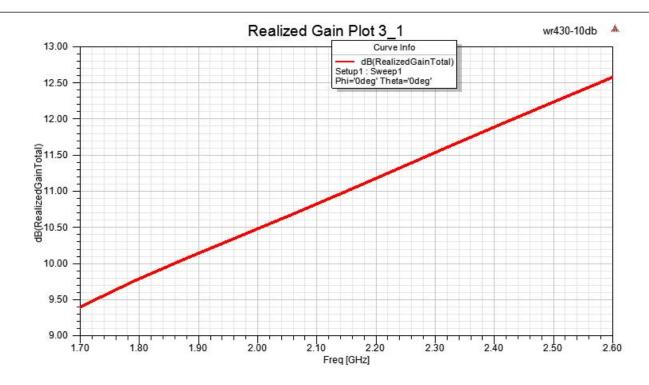






## **FM1WAN430-10NF**

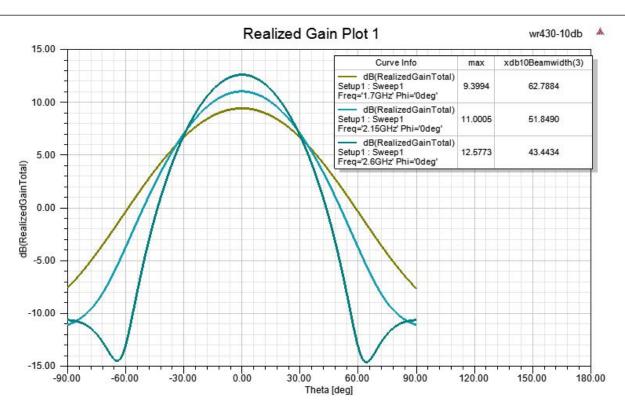





### **FM1WAN430-10NF**

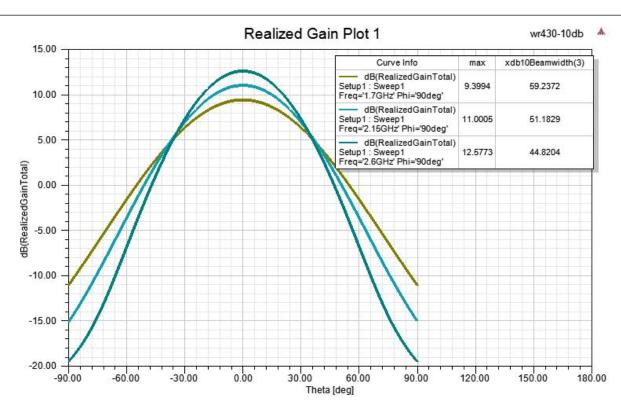

WR-430 Standard Gain Horn with 10 dBi gain, N Female Connector, Integrated Cage-Style Mount from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: WR-430 Standard Gain Horn with 10 dBi gain, N Female Connector, Integrated Cage-Style Mount FM1WAN430-10NF

URL: https://www.fairviewmicrowave.com/wr-430-standard-gain-horn-10-db-n-fm1wan430-10nf-p.aspx

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

