

**2.2 dB NF Low Noise Amplifier Operating From 8 GHz to 12 GHz with 18 dB Gain, 13 dBm Psat and SMA**

FMAM1027 is a X-band coaxial low noise amplifier operating in the 8 to 12 GHz frequency range. The amplifier offers 2.2 dB typical noise figure, 13 dBm minimum of saturated power and high 18 dB minimal small signal gain. This exceptional technical performance is achieved through the use of hybrid MIC design and advanced GaAs PHEMT devices. The low noise amplifier requires typically a +12V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, bias sequencing, and reverse bias protection for added reliability. The amplifier operates over the temperature range of -40°C and +85°C.

**Electrical Specifications** (TA = +25°C , DC Voltage = 12Volts , DC Current = 150mA)

Description	Min	Typ	Max	Unit
Frequency Range	8		12	GHz
Small Signal Gain	18			dB
Minimum Psat	+13			dBm
Noise Figure		2.2		dB
Input VSWR			2:1	
Output VSWR			2:1	
Operating DC Voltage	11	12	13	Volts
Operating DC Current			150	mA
Operating Temperature Range	-40		+85	°C

**Mechanical Specifications**

<b>Size</b>	
Length	1.083 in [27.51 mm]
Width	1.093 in [27.76 mm]
Height	0.382 in [9.7 mm]
Input Connector	SMA Female
Output Connector	SMA Female

**Environmental Specifications**

<b>Temperature</b>	
Operating Range	-40 to +85 deg C
Shock	RTCA, DO-160C
Vibration	RTCA, DO-160C

**Compliance Certifications** (visit [www.FairviewMicrowave.com](http://www.FairviewMicrowave.com) for current document)

**Plotted and Other Data**

- Notes:
- Values at 25 °C, sea level
  - ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.



**Features:**



- 8 GHz to 12 GHz Frequency Range
- Psat: 13 dBm min
- High Small Signal Gain: 18 dB min
- Noise Figure: 2.2 dB typ
- 50 Ohm Input and Output Matched
- -40 to 85°C Operating Temperature
- Unconditionally Stable
- Regulated Supply & Bias Sequencing
- Hermetically Sealed Module
- Overvoltage External Protection for Easy Repair



**Applications:**

- Laboratory Applications
- R&D Labs
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Military & Space
- Communication Systems
- Microwave Radio Systems
- Satellite Communications
- Low Noise Amplifier
- General Purpose Amplification
- Gain Block

Fairview Microwave  
 1130 Junction Dr. #100  
 Allen, TX 75013  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Typical Performance Data**

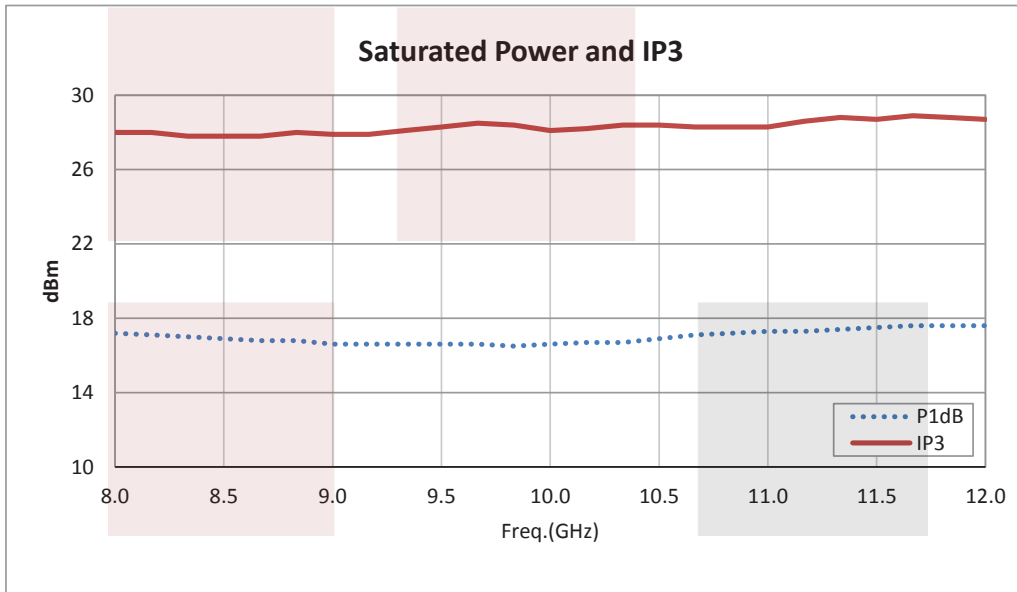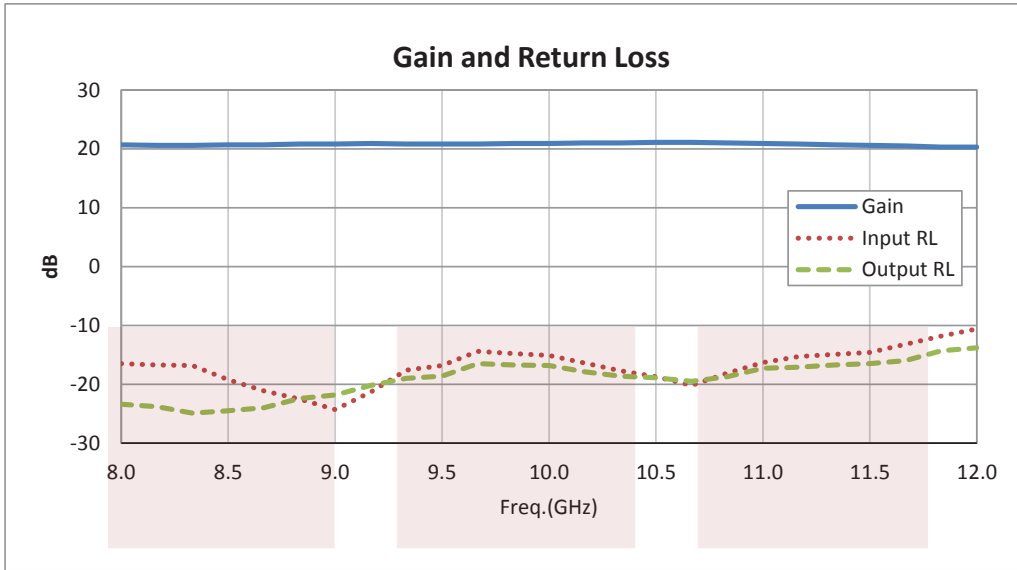

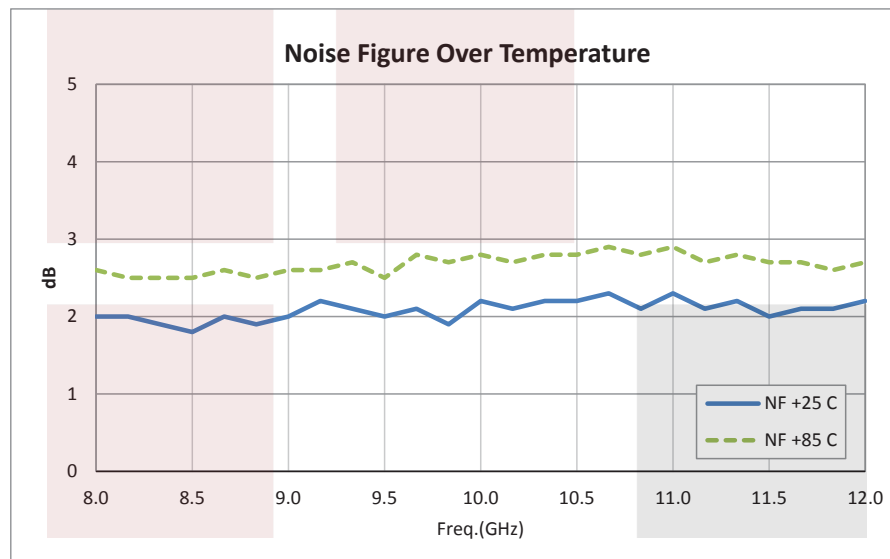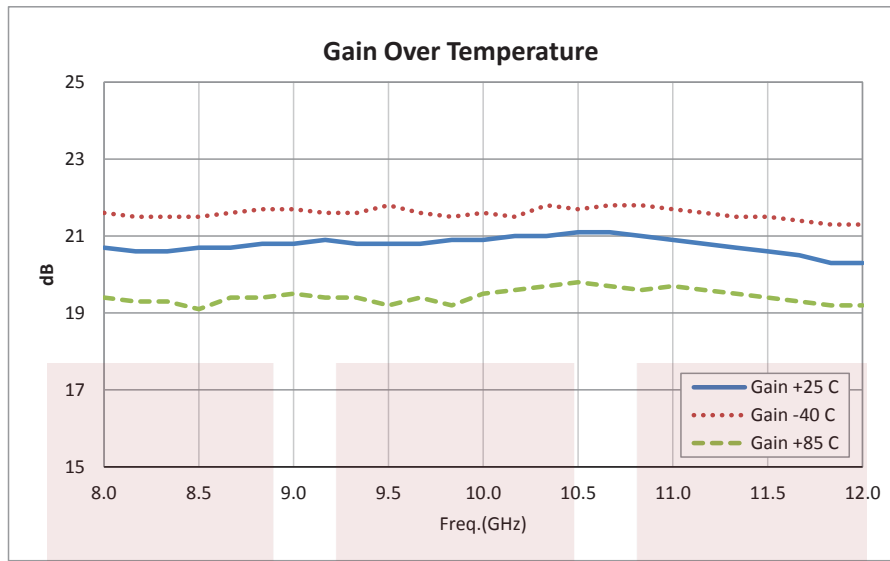


2.2 dB NF Low Noise Amplifier Operating From 8 GHz to 12 GHz with 18 dB Gain, 13 dBm Psat and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [2.2 dB NF Low Noise Amplifier Operating From 8 GHz to 12 GHz with 18 dB Gain, 13 dBm Psat and SMA FMAM1027](#)

URL: <http://www.fairviewmicrowave.com/2.2db-nf-low-noise-amplifier-18db-fmam1027-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

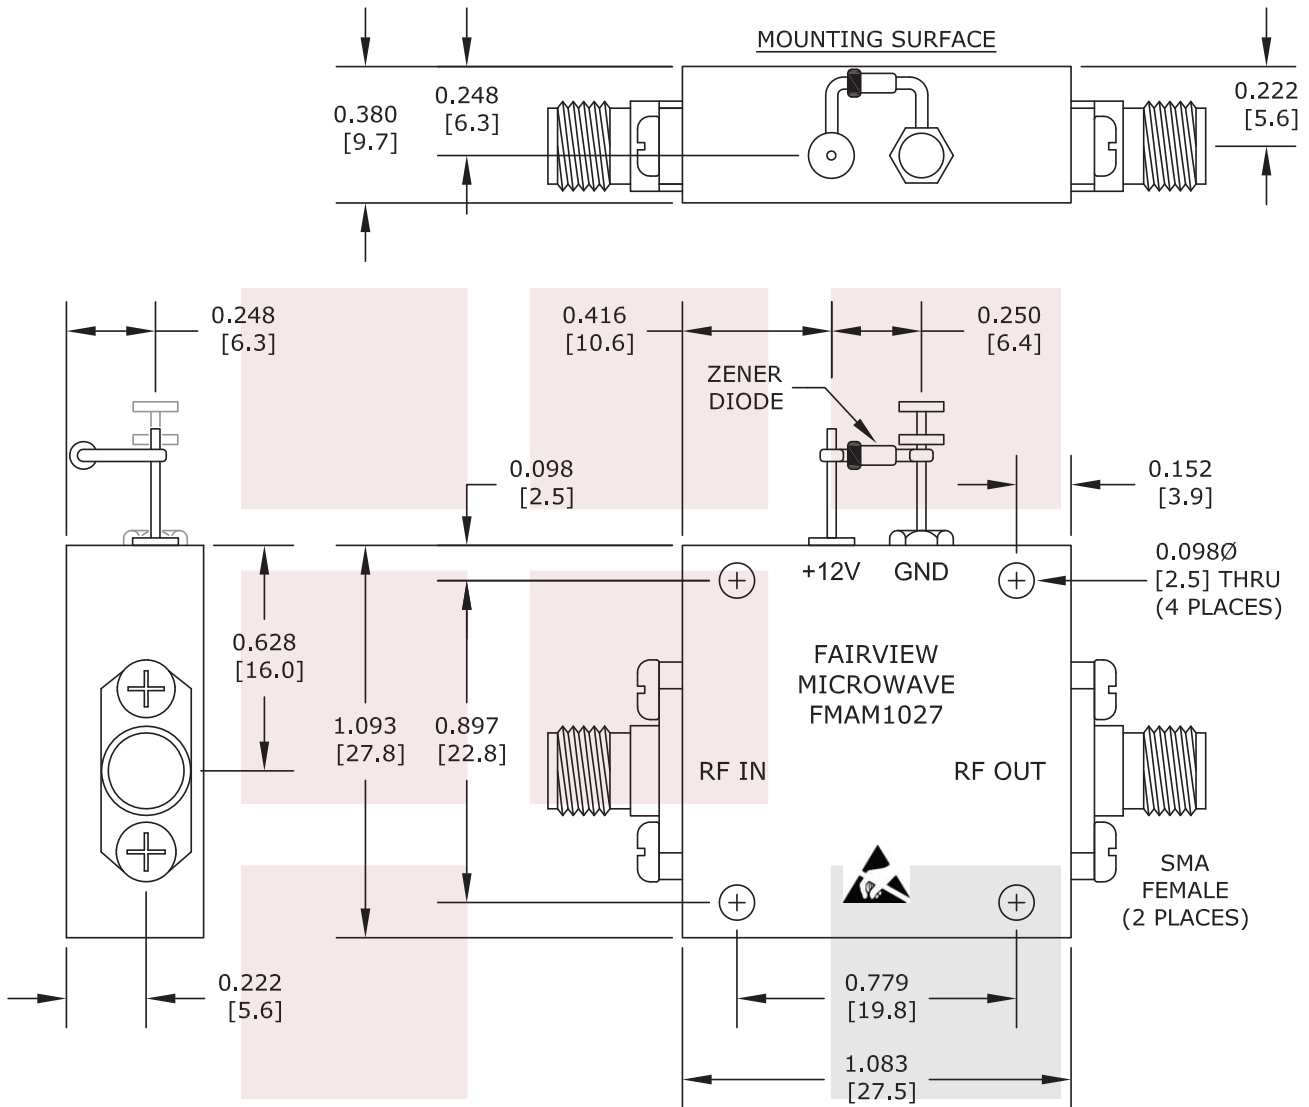

<b>FAIRVIEW MICROWAVE INC.</b> ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 2.2 dB NF Low Noise Amplifier Operating From 8 GHz to 12 GHz with 18 dB Gain, 13 dBm Psat and SMA		DWG NO FMAM1027		CAGE CODE 3FKR5	
CAD FILE	061515	SHEET	SCALE	N/A	SIZE A 2233