

16 dB Fixed Attenuator SMA Male (Plug) to SMA Female (Jack) from 0.009 MHz to 6 GHz Rated to 2 Watts, Brass Body, 1.22 VSWR



FMAT1015

Features

- 9 kHz to 6 GHz Frequency Range
- Attenuation 16±0.6 dB
- Max Power 2 Watts (CW)
- Return Loss < -20 dB

Applications

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

Description

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (or attenuate) a known amount. These attenuator pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock varieties and ships them same day. The FMAT1015 is a 16 dB Fixed Attenuator that operates from 0.009 to 6 GHz and is rated to 2 Watts. The versatile coaxial package uses SMA male to SMA female connectors.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	9KHz		6	GHz
Impedance		50		Ohms
Nominal Attenuation		16		dB
Attenuation Accuracy			±0.6	dB
VSWR		1.15:1	1.22:1	
Return Loss		-23	-20	dB
Input Power, CW			2	Watts

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	9KHz to 3	3 to 6				GHz
Attenuation Accuracy, Typ	0.15	0.3				dB
Attenuation Accuracy, Max	±0.3	±0.6				dB

Mechanical Specifications

Size	
Length	1.22 in [30.99 mm]
Width/Diameter	0.37 in [9.4 mm]
Height	0 in [0 mm]
Weight	0.0241 lbs [10.93 g]
Body Material and Plating	Brass

16 dB Fixed Attenuator SMA Male (Plug) to
SMA Female (Jack) from 0.009 MHz to 6 GHz
Rated to 2 Watts, Brass Body, 1.22 VSWR



FMAT1015

Configuration		
Design	Fixed	
Package Style	Connectorized	
Connectors		
Description	Connector 1	Connector 2
Type	SMA Male	SMA Female
Hex Size	5/16 inch	

Environmental Specifications


Temperature

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

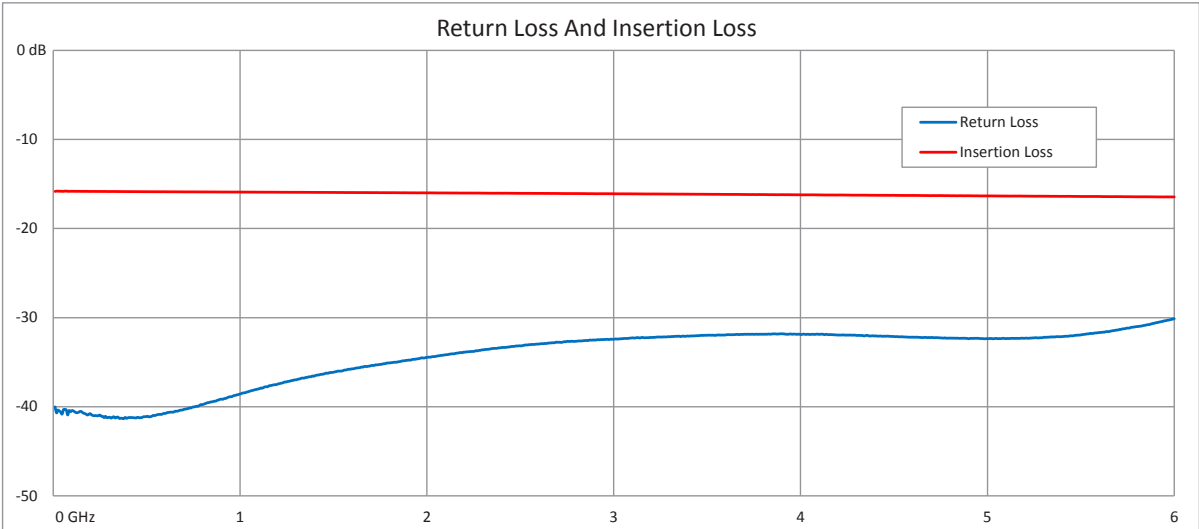

16 dB Fixed Attenuator SMA Male (Plug) to
SMA Female (Jack) from 0.009 MHz to 6 GHz
Rated to 2 Watts, Brass Body, 1.22 VSWR



FMAT1015


16 dB Fixed Attenuator SMA Male (Plug) to SMA Female (Jack) from 0.009 MHz to 6 GHz Rated to 2 Watts, Brass Body, 1.22 VSWR from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [16 dB Fixed Attenuator SMA Male \(Plug\) to SMA Female \(Jack\) from 0.009 MHz to 6 GHz Rated to 2 Watts, Brass Body, 1.22 VSWR FMAT1015](https://www.fairviewmicrowave.com/16db-fixed-attenuator-sma-male-sma-female-2-watts-fmat1015-p.aspx)

URL: <https://www.fairviewmicrowave.com/16db-fixed-attenuator-sma-male-sma-female-2-watts-fmat1015-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMAT1015 CAD Drawing
16 dB Fixed Attenuator SMA Male (Plug) to SMA Female (Jack) from
0.009 MHz to 6 GHz Rated to 2 Watts, Brass Body, 1.22 VSWR

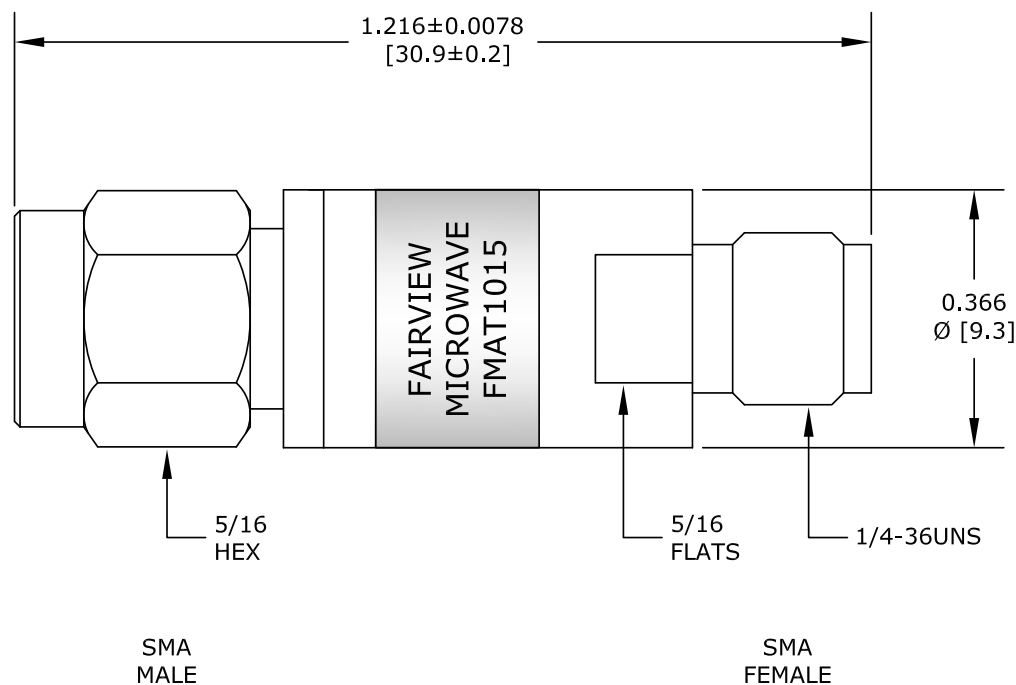

GENERAL TOLERANCES	
0.039-0.158	± 0.0055
0.158-0.630	± 0.0059
0.630-2.480	± 0.0078
>2.480	± 0.0118

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE		DWG NO		CAGE CODE	
		FMAT1015		3FKR5	
		CAD FILE	030116	SHEET	SCALE N/A SIZE A 3045