

Bandpass Cavity Filter Operating From 19.2 GHz to 20.2 GHz With SMA Female Connectors

The FMFL1010 is an six section band pass filter. It is part of a family of filters that is useful for satellite communications. The pass band is 1000 MHz wide, from 19.2 GHz to 20.2 GHz. Implemented using a Comblin design, the filter has excellent rejection of 35 dB at 18.2 GHz and 21.2 GHz, or ± 1.5 GHz from mid band. It has a maximum insertion loss of 1.5 dB. The FMFL1010 has SMA female connectors.

Electrical Specifications

Description	Min	Typ	Max	Units
Passband Frequency	19.2		20.2	GHz
Impedance		50		Ohms
Insertion Loss			1.5	dB
Passband VSWR		1.4:1		
Rejection at 18.2 GHz	35			dB
Rejection at 21.2 GHz	35			dB
Input Power, CW			2	Watts

Electrical Specification Notes:
Values at 25°C, sea level.

Mechanical Specifications

Size	
Length	1.55 in [39.37 mm]
Width	0.45 in [11.43 mm]
Height	0.4 in [10.16 mm]

Configuration

Design	Comblin
Number of Sections	6
Package Style	Connectorized
Connector 1	SMA Female
Connector 2	SMA Female
Connector Option	Field Replaceable

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

RoHS Compliant	Yes
REACH Compliant	06/14/2014

Plotted and Other Data

Notes:
• Values at 25°C, sea level.



Features:


- Pass band of 1000 MHz
- 19.2 GHz to 20.2 GHz
- Six section
- Comblin filter design
- 35 dB rejection at 18.2 GHz and 21.2 GHz (1.5 GHz from band center)
- Typical insertion loss of 1.5 dB
- Female SMA connectors

Applications:

- Satellite communications

Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

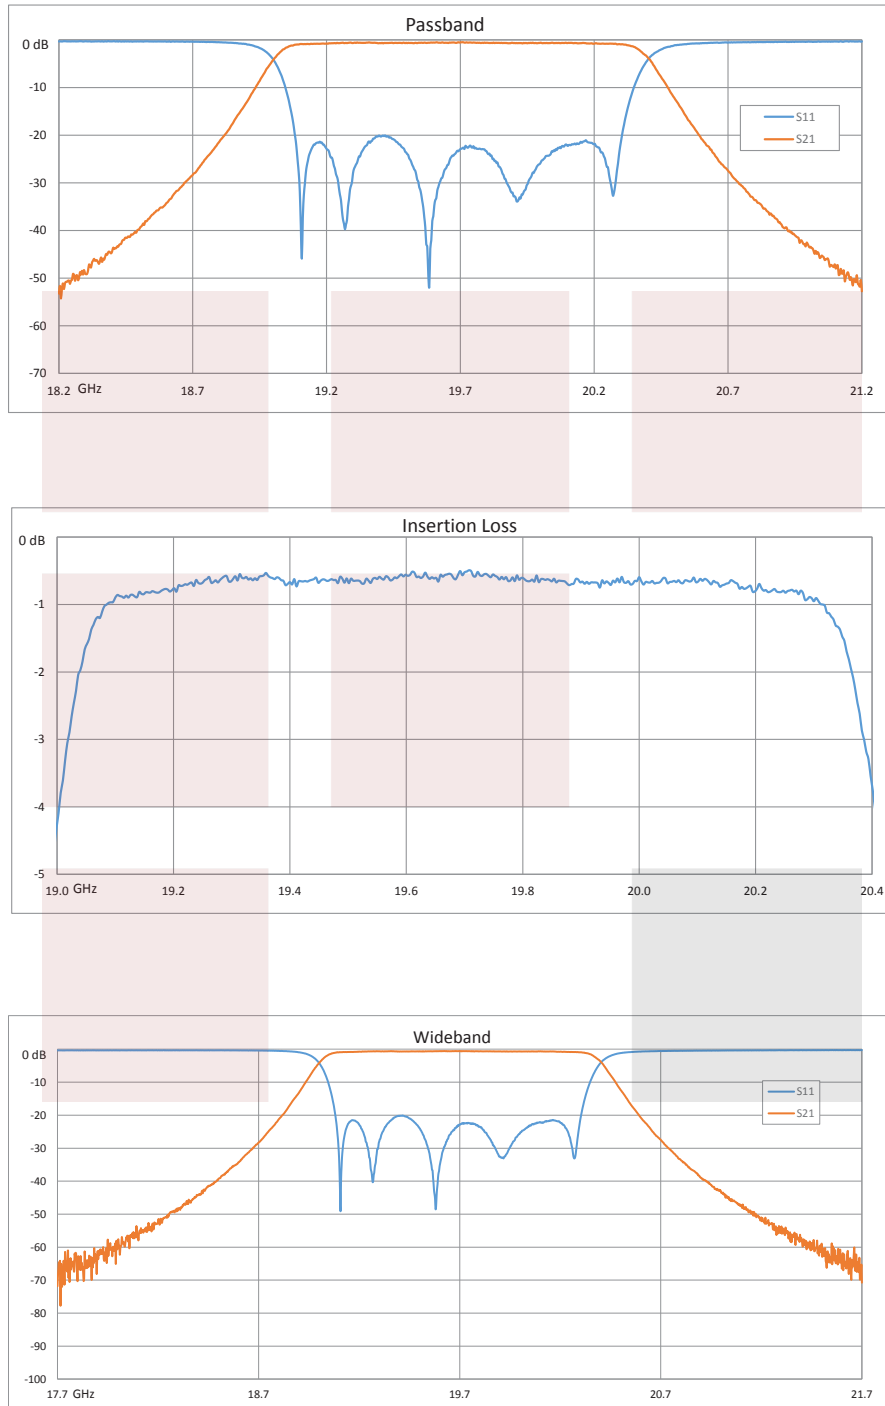


Bandpass Cavity Filter Operating From 19.2 GHz to 20.2 GHz With SMA Female Connectors from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Bandpass Cavity Filter Operating From 19.2 GHz to 20.2 GHz With SMA Female Connectors FMFL1010](#)

URL: <http://www.fairviewmicrowave.com/bandpass-cavity-filter-19.2-20.2-ghz-sma-female-connectors-fmfl1010-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



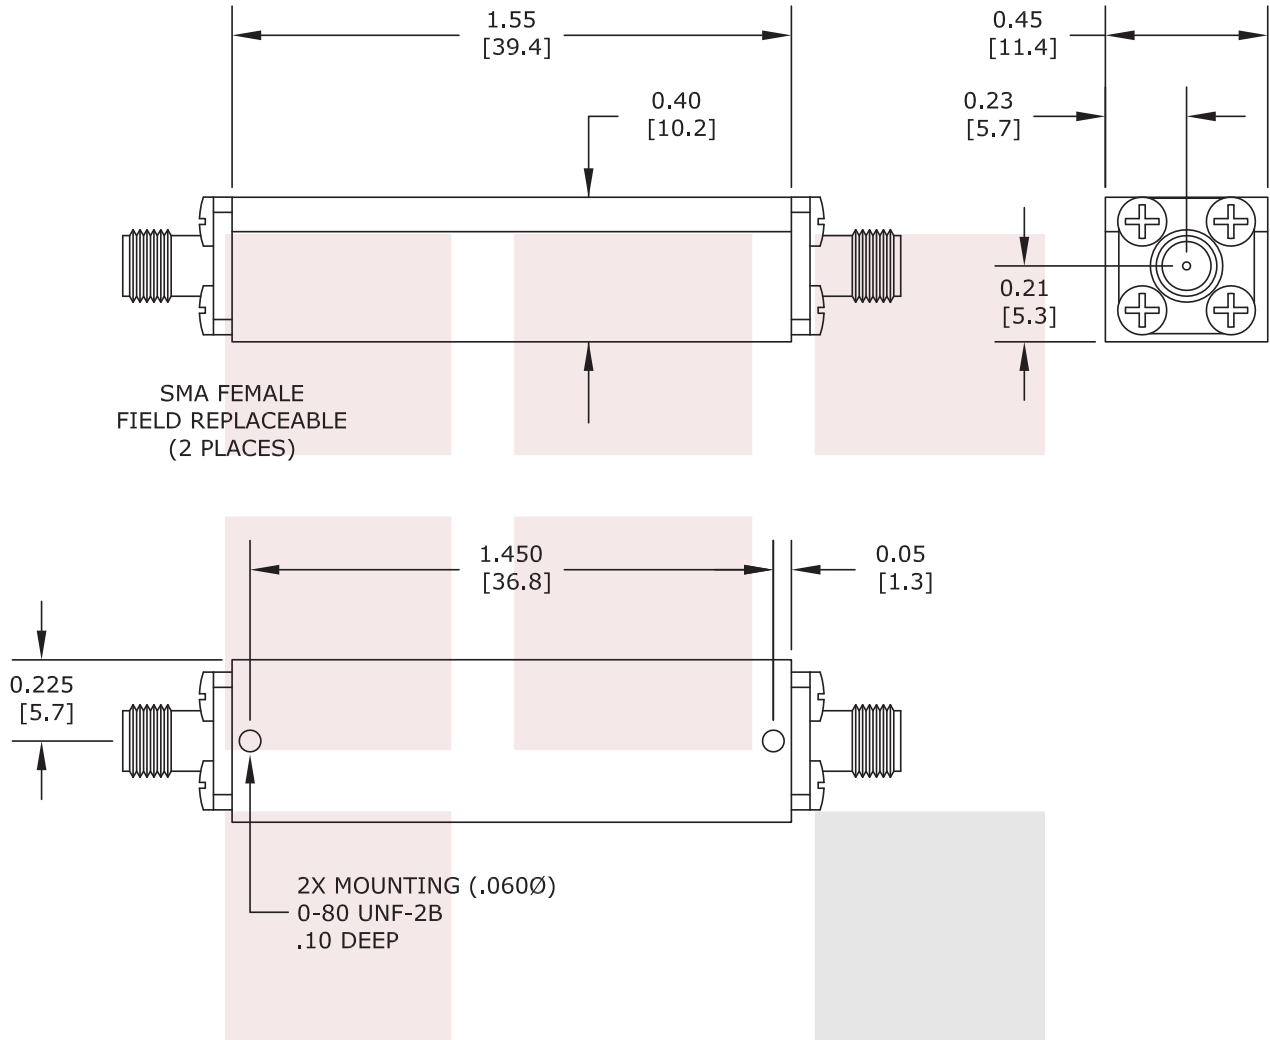

TOLERANCE	
.X	± .1
.XX	± .01
.XXX	± .005
.XXXX	± .0010

* THESE DIMENSIONS AND TOLERANCES
 SUPERSEDE NOTE #1 ON TITLE BLOCK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Bandpass Cavity Filter Operating From 19.2 GHz to 20.2 GHz With SMA Female Connectors		DWG NO FMFL1010		CAGE CODE 3FKR5	
CAD FILE	120415	SHEET	SCALE	N/A	SIZE A 2233