

FMC00502-12 DATA SHEET

N Male to N Male Cable LMR-240-UF Coax with Heat Shrink, In 12 Inch Length

The type N male to type N male 12 inch cable using LMR-240-UF coax, part number FMC00502-12, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240-UF coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC00502-12 type N male to type N male cable assembly operates to 5.8 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description		Min	T	ур	Max	ι	Inits
Frequency Range		DC			5.8		GHz
VSWR					1.4:1		
Velocity of Propagation			8	34			%
RF Shielding		90					dB
Group Delay			1.21	[3.97]		ns/f	t [ns/m]
Capacitance			24.2	[79.4]		pF/f	t [pF/m]
Inductance			0.06	[0.2]		uH/f	t [uH/m]
DC Resistance Inner Conductor			4.28 [[14.04]		Ω/100	0ft [Ω/Km]
DC Resistance Outer Conductor			3.89 [[12.76]		Ω/100	0ft [Ω/Km]
Operating Voltage (DC)					2,500		Vdc
Dielectric Withstanding Voltage (DC)					1,500		Vdc
Jacket Spark					5,000	\	/rms
Input Power (Peak)					5.6	K'	Watts

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.14	0.2	0.28	0.45	0.69	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1*SQRT(FGHz) dB for the straight connectors.

Mechanical Specifications

Cable Assembly

CableCable Type

LMR-240-UF



Configuration:

- N Male
- N Male
- LMR-240-UF

Features:

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- TPE Jacket

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Impedance50 OhmsInner Conductor TypeStrandedInner Conductor Material and PlatingCopperDielectric TypePE (F)

Number of Shields

Shield Layer 1

Shield Layer 2

Jacket Material

Aluminum Tape

Tinned Copper Braid

TPE, Black

Jacket Diameter 0.24 in [6.1 mm]

One Time Minimum Bend Radius 0.75 in [19.05 mm]
Repeated Minimum Bend Radius 2.5 in [63.5 mm]
Bending Moment 0.13 lbs-ft [0.18 N-m]

Flat Plate Crush 13 lbs/in [0.23 Kg/mm]
Tensile Strength 80 lbs [36.29 Kg]

Connectors

Description	Connector 1	Connector 2
Туре	N Male Threaded	d N Male Threaded
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material & Plating	Beryllium Copper, G	old Beryllium Copper, Gold
Contact Plating Spec.	ASTM-B488	ASTM-B488
Dielectric Type	PTFE	PTFE
Outer Cond Material & Plat	ing Brass, Tri-Metal	Brass, Tri-Metal
Body Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Spec.	QQ-N-290	QQ-N-290
Coupling Nut Material & Pla	nting Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Spec.	QQ-N-290	QQ-N-290
Hex Size	13/16 inch	13/16 inch

Environmental Specifications Temperature

Operating Range Storage Range

-40 to +85 deg C -70 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Example: FMC00502-12 = 12 inches long cable

FMC00502-100cm = 100 cm long cable

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2020 REV 1.1 Page 2 of 4






N Male to N Male Cable LMR-240-UF Coax with Heat Shrink, In 12 Inch Length from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: N Male to N Male Cable LMR-240-UF Coax with Heat Shrink, In 12 Inch Length FMC00502-12

URL: https://www.fairviewmicrowave.com/low-loss-n-male-to-n-male-cable-lmr-240-uf-coax-in-12-inch-fmc00502-12-p. aspx

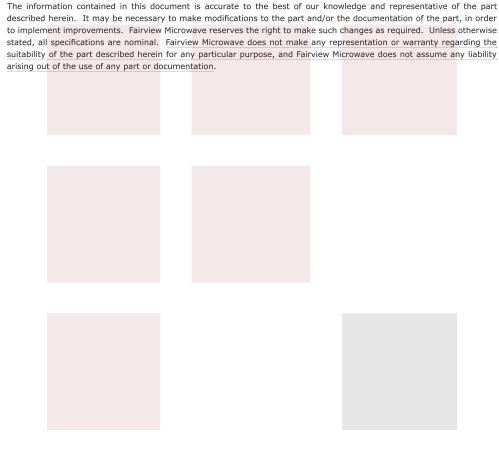

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





