

## FMC0103195LF-60 DATA SHEET

# N Male to TNC Male Cable LMR-195 Coax in 60 Inch with LF Solder

The type N male to TNC male 60 inch cable using LMR-195 coax, part number FMC0103195LF-60, from Fairview Microwave is in-stock and ships same day. This Fairview type N to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-195 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC0103195LF-60 type N male to TNC male cable assembly operates to 2.5 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

## **Electrical Specifications**

Description	Min	Т	ур	Max	ι	Jnits
Frequency Range	DC			2.5		GHz
VSWR				1.35:1		
Velocity of Propagation		8	33			%
RF Shielding	90					dB
Capacitance		24.5	[80.38]		pF/f	t [pF/m]
Inductance		0.06	1 [0.2]		uH/f	t [uH/m]
DC Resistance Inner Conductor		5.36 [17.59]		Ω/1000ft [Ω/Km]		
DC Resistance Outer Cor	nductor	5.9 [	19.36]		Ω/100	0ft [Ω/Km]

## **Mechanical Specifications**

### **Cable Assembly**

Length\* 60 in [152.4 cm] Weight 0.24 lbs [108.86 g]

#### Cable

LMR-195 Cable Type **Impedance** 50 Ohms Inner Conductor Type Solid Inner Conductor Material and Plating Copper Dielectric Type PE (F) Number of Shields 2 Shield Laver 1 Tinned Copper Shield Layer 2 Aluminum Tape Jacket Material PE, Black 0.195 in [4.95 mm] Jacket Diameter



## **Configuration:**

- N Male
- TNC Male
- LMR-195

## **Features:**

- Max Frequency 2.5 GHz
- Shielding Effectivity > 90 dB
- 83% Phase Velocity
- Double Shielded
- PE Jacket

## **Applications:**

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Connectors**

Connector 1	Connector 2			
N Male	TNC Male			
50 Ohms	50 Ohms			
Beryllium Copper, Gold	Beryllium Copper, Gold			
PTFE	PTFE			
Brass, Tri-Metal	Brass, Silver			
	N Male 50 Ohms Beryllium Copper, Gold PTFE			

**Environmental Specifications** 

**Temperature** 

Operating Range

-65 to +85 deg C

**Compliance Certifications** (see product page for current document)

Plotted and Other Data

Notes:

**How to Order** 

Part Number Configuration:

Example: FMC0103195LF-12 = 12 inches long cable

FMC0103195LF-100cm = 100 cm long cable

N Male to TNC Male Cable LMR-195 Coax in 60 Inch with LF Solder from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: N Male to TNC Male Cable LMR-195 Coax in 60 Inch with LF Solder FMC0103195LF-60

URL: https://www.fairviewmicrowave.com/standard-n-male-tnc-male-cable-lmr195-coax-fmc0103195lf-60-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689



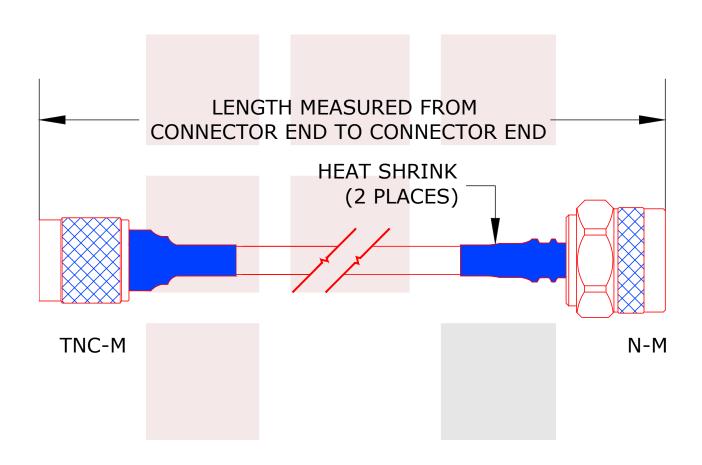

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].							
N Male to TNC Male Cable LMR-195 Coax in 60 Inch	DWG NO FMC0103195				CAGE CODE 3FKR5			
with LF Solder	CAD FILE 101314	SHEET	SCAL	E N/A	SIZE A	5568		