

# **FMC0115600-48 DATA SHEET**

# N Male to 7/16 DIN Male Cable LMR-600 Coax in 48 Inch

The type N male to 7/16 DIN male 48 inch cable using LMR-600 coax, part number FMC0115600-48, from Fairview Microwave is in-stock and ships same day. This Fairview type N to 7/16 DIN cable assembly has a male to male gender configuration with 50 ohm flexible LMR-600 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC0115600-48 type N male to 7/16 DIN male cable assembly operates to 6 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

## **Electrical Specifications**

Description		Min	Тур		Max	ι	Inits
Frequency Range		DC			6		GHz
Velocity of Propagation			8	37			%
RF Shielding		90					dB
Capacitance			23.4	[76.77	]	pF/f	t [pF/m]
Inductance			0.058	[0.19	·]	uH/f	t [uH/m]
DC Resistance Inner Cor	ductor		0.53	[1.74]		Ω/100	0ft [Ω/Km]
DC Resistance Outer Cor	nductor		1.2	[3.94]		Ω/100	0ft [Ω/Km]



# **Configuration:**

- N Male
- 7/16 DIN Male
- LMR-600

#### **Features:**

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 87% Phase Velocity
- PE Jacket

## **Applications:**

- General Purpose
- · Laboratory Use

#### **Mechanical Specifications**

#### **Cable Assembly**

Length\*

Weight

Cable

Cable Type Impedance

Inner Conductor Type

Inner Conductor Material and Plating

Dielectric Type
Number of Shields

Shield Layer 1 Shield Layer 2 Jacket Material

Jacket Diameter

48 in [121.92 cm]

0.649 lbs [294.38 g]

LMR-600 50 Ohms Solid

Copper Clad Aluminum

PE (F)

Tinned Copper Aluminum Tape PE, Black

0.59 in [14.99 mm]

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Connectors**

Description	Connector 1	Connector 2		
Туре	N Male	7/16 DIN Male		
Impedance	50 Ohms	50 Ohms		
Contact Material & Plating	Beryllium Copper, Gold	Brass, Silver		
Dielectric Type	PTFE	PTFE		
Body Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal		
Coupling Nut Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal		


Mechanical Specification Notes:

#### **Environmental Specifications**

**Temperature** 

Operating Range +85 deg C

**Compliance Certifications** (see product page for current document)

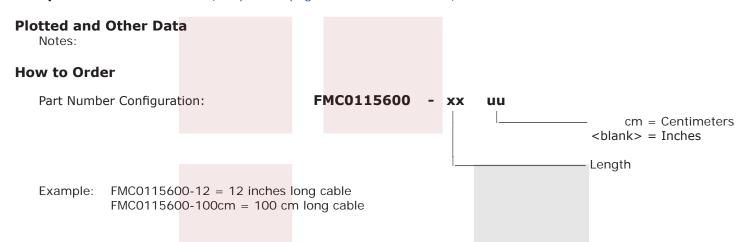

N Male to 7/16 DIN Male Cable LMR-600 Coax in 48 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: N Male to 7/16 DIN Male Cable LMR-600 Coax in 48 Inch FMC0115600-48

URL: https://www.fairviewmicrowave.com/n-male-7-16-male-cable-lmr-600-coax-fmc0115600-48-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2019

<sup>\*</sup>All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.





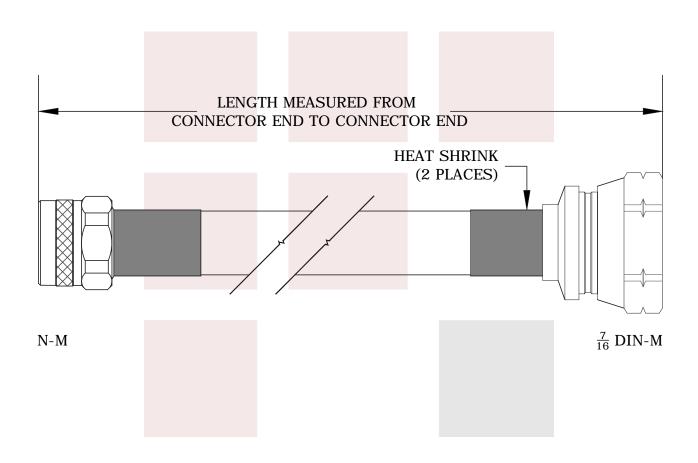

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].					
N Male to 7/16 DIN Male Cable LMR-600 Coax in 48 Inch	DWG NO FMC0115600			CAGE CODE 3FKR5		
	CAD FILE 101614	SHEET	SCALE	E N/A	SIZE A	5568