

**SMA Male to SMA Male Cable RG-316 Coax in 3 Inch**

The SMA male to SMA male 3 inch cable using RG-316 coax, part number FMC0202315-03, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible RG-316 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC0202315-03 SMA male to SMA male cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

**Electrical Specifications**

Description	Min	Typ	Max	Units
Frequency Range	DC		3	GHz
VSWR			1.35:1	
Velocity of Propagation		70		%
Capacitance		32 [104.99]		pF/ft [pF/m]
DC Current			3	Amps

**Mechanical Specifications**

**Cable Assembly**

Length\* 3 in [76.2 mm]  
Weight 0.0233 lbs [10.57 g]

**Cable**

Cable Type RG-316  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper, Silver  
Dielectric Type PTFE  
Number of Shields 1  
Shield Layer 1 Silver Plated Copper Braid  
Jacket Material FEP, Tan  
Jacket Diameter 0.098 in [2.49 mm]  
  
Repeated Minimum Bend Radius 3 in [76.2 mm]



**Configuration:**

- SMA Male
- SMA Male
- RG-316

**Features:**

- Max Frequency 3 GHz
- 70% Phase Velocity
- FEP Jacket

**Applications:**

- General Purpose
- Laboratory Use

Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
www.fairviewmicrowave.com  
sales@fairviewmicrowave.com

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Impedance	50 Ohms	50 Ohms
Contact Material & Plating	Brass, Gold	Brass, Gold
Contact Plating Spec.	50µ in. minimum	50µ in. minimum
Dielectric Type	Teflon	Teflon
Body Material & Plating	Brass, Nickel	Brass, Nickel
Body Plating Spec.	100µ in. minimum	100µ in. minimum
Hex Size	5/16 inch	5/16 inch
Torque	4 in-lbs 0.45 Nm	4 in-lbs 0.45 Nm

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.

**Environmental Specifications**  
**Temperature**


Operating Range -65 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

**Typical Performance Data**

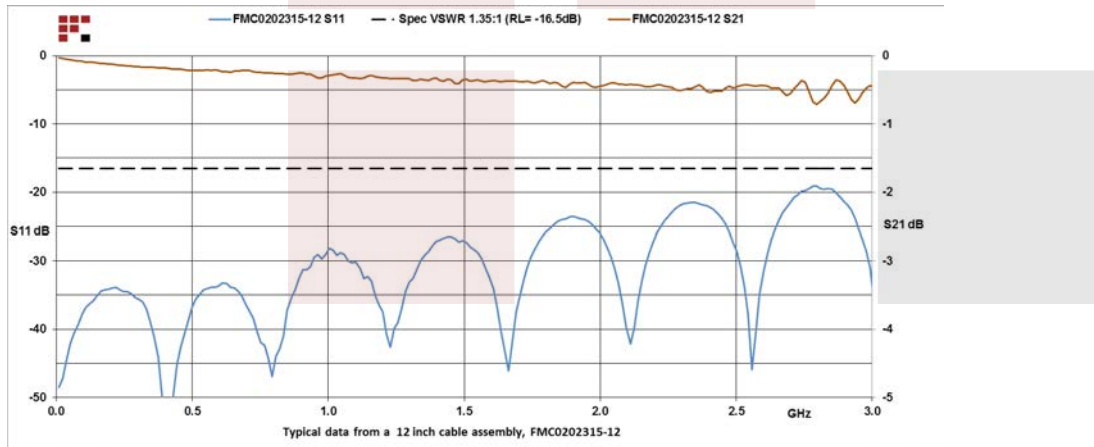

**How to Order**

Part Number Configuration:

**FMC0202315 - xx uu**

cm = Centimeters  
<blank> = Inches  
Length

Example: FMC0202315-12 = 12 inches long cable  
FMC0202315-100cm = 100 cm long cable


SMA Male to SMA Male Cable RG-316 Coax in 3 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [SMA Male to SMA Male Cable RG-316 Coax in 3 Inch FMC0202315-03](#)

URL: <https://www.fairviewmicrowave.com/sma-male-sma-male-cable-rg316-coax-fmc0202315-03-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



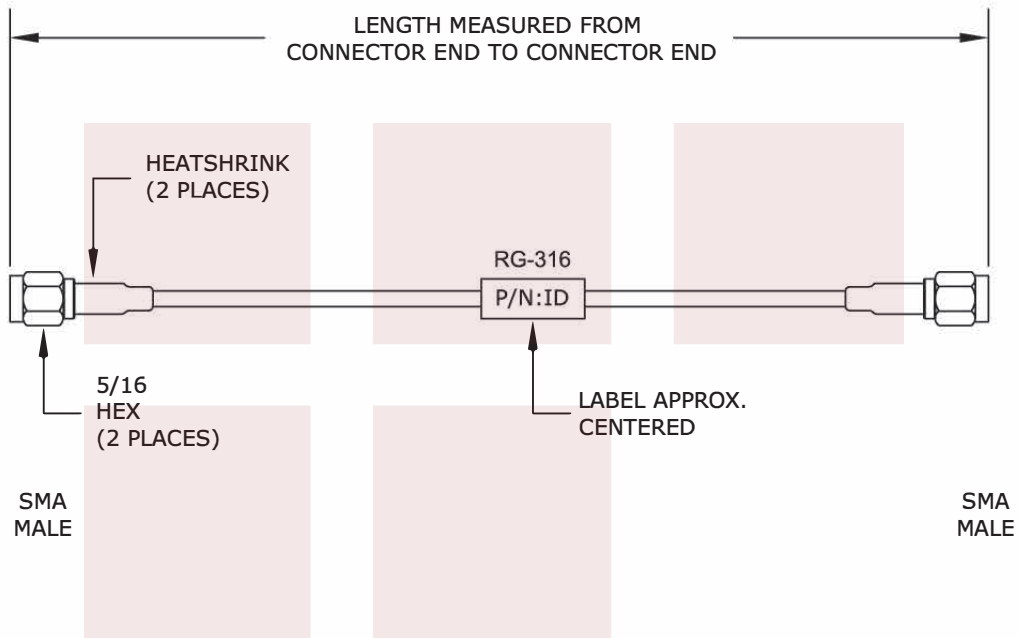

NOTE:  
CABLES 36" AND UNDER HAVE 1 LABEL  
CENTERED. CABLES OVER 36" HAVE 2  
LABELS, ONE AT EACH END, 6.0" FROM  
THE FRONT OF THE CONNECTOR.

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
<p><u>Part Number Configuration</u></p> <p>FMC zzzzzz - [xx] [uu]</p> <p>cm = Centimeters &lt; Blank &gt; = Inches Length</p>	<u>Examples</u>	-12	12"	-25cm	25cm
	FMC000-100	-24	24"	-50cm	50cm
	FMC000-100cm	-36	36"	-75cm	75cm
		-48	48"	-100cm	100cm
		-60	60"	-125cm	125cm
		-xx	Custom Length	-xxcm	Custom Length
	<p>NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].</p>				
<p><b>FAIRVIEW MICROWAVE INC.</b> ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM</p>		<p>DWG NO <b>FMC0202315</b></p>		<p>CAGE CODE <b>3FKR5</b></p>	
<p>TITLE SMA Male to SMA Male Cable RG-316 Coax in 3 Inch</p>		<p>CAD FILE 092514</p>	<p>SHEET</p>	<p>SCALE N/A</p>	<p>SIZE A 150</p>