

# FMCA1306-24 **DATA SHEET**

## Low PIM RA 7/16 DIN Male to 7/16 DIN Male Plenum Cable SPP-250-LLPL Coax in 24 Inch

Low PIM RA 7/16 DIN male to 7/16 DIN male part number FMCA1306 from Fairview Microwave is in-stock and ships same day. This low PIM RA 7/16 DIN male to 7/16 DIN male plenum coax cable assembly offers low PIM performance to support Distributed Antenna Systems (DAS), in-building wireless and other emerging mobile communication networks. The SPP-250-LLPL coax cable carries a UL910 rating for plenum installations. Each low PIM RA 7/16 DIN male to 7/16 DIN male cable assembly is marked with its actual Passive Intermodulation (PIM) test result.

Fairview's FMCA1306 datasheet specifications and outline drawing are shown below in this PDF. Our extensive offering of low PIM cable assemblies, low-PIM adapters and other RF products support multi-carrier system prototype, cable installations and PIM testing applications.

## **Electrical Specifications**

Description	Min	Т	ур	Max	ι	Inits
Frequency Range	DC			6		GHz
VSWR				1.35:1		
Velocity of Propagation		7	76			%
RF Shielding	100					dB
Passive Intermodulation		-1	.65	-160		dBc
Capacitance		26.7	[87.6]	]	pF/f	t [pF/m]
Operating Voltage (AC)				750	١	/rms

#### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2	4	6	GHz
Insertion Loss (Max.)	0.48	0.51	0.56	0.64	0.7	dB
VSWR (Max.)	1.25:1	1.25:1	1.25:1	1.35:1	1.35:1	
Power Handling (Max.	) 850	507	460	370	250	W

**Electrical Specification Notes:** 

Values at 25°C, sea level

PIM test results vary between cables

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated loss of 0.4dB of connector loss.

#### **Mechanical Specifications**

#### **Cable Assembly**

Length\* 24 in [609.6 mm] Weight

Cable

Cable Type Inner Conductor Type 0.5019 lbs [227.66 g]

SPP-250-LLPL Solid



# **Configuration:**

- 7/16 DIN Male Right Angle
- 7/16 DIN Male
- SPP-250-LLPL

### Features:

- Max Frequency 6 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 100 dB
- 76% Phase Velocity
- FEP Jacket
- Low PIM < -160 dBc
- IP67 (Mated)
- Low Loss with Excellent VSWR
- PIM Test Results Marked on Each
- UL910 Plenum Rated Cable
- Extremely Flexible and Lightweight

# **Applications:**

- General Purpose
- Laboratory Use
- Low PIM Applications
- DAS
- Mobile Networks
- In-Building Wireless
- Small Cells
- PIM Testing

## Cable Diagram:

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Inner Conductor Material and Plating

Dielectric Type Number of Shields Shield Layer 1

Outer Conductor Diameter

Jacket Material Jacket Diameter Copper, Bare PTFE

1 Annular Corrugated Copper Tube

0.25 in [6.35 mm]

0.28 in [7.11 mm]

One Time Minimum Bend Radius 1.5 in [38.1 mm]

#### **Connectors**

Connector 1	Connector 2
7/16 DIN Male	7/16 DIN Male
50 Ohms	50 Ohms
Brass, Silver	Brass, Silver
PTFE	PTFE
Brass, Tri-Metal	Brass, Tri-Metal
Silicone Rubber	Silicone Rubber
	7/16 DIN Male 50 Ohms Brass, Silver PTFE Brass, Tri-Metal

## **Environmental Specifications**

Temperature

-55 to +125 deg C Operating Range

Plenum Rating

**UL910** 

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

· Values at 25°C, sea level.

#### **How to Order**

Part Number Configuration:

FMCA1306 - xx uu cm = Centimeters <br/>
<br/>
dlank> = Inches Length

Example: FMCA1306-12 = 12 inches long cable

FMCA1306-100cm = 100 cm long cable

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2020

REV 1.0 Page 2 of 4





Low PIM RA 7/16 DIN Male to 7/16 DIN Male Plenum Cable SPP-250-LLPL Coax in 24 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low PIM RA 7/16 DIN Male to 7/16 DIN Male Plenum Cable SPP-250-LLPL Coax in 24 Inch FMCA1306-24

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order


URL: https://www.fairviewmicrowave.com/ra-7-16-male-7-16-male-cable-spp250llpl-fmca1306-24-p.aspx

to impler	ment improv	ements.	Fairview	Microw	ave reserv	es the rigl	nt to mak	ke suc	h changes	as rec	juired.	Unless	other	rwise
	III specificati													
	y of the par					purpose,	and Fair	view	Microwave	does	not ass	sume a	ny lia	bility
arising o	ut of the use	e of any	part or do	ocument	tation.									

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





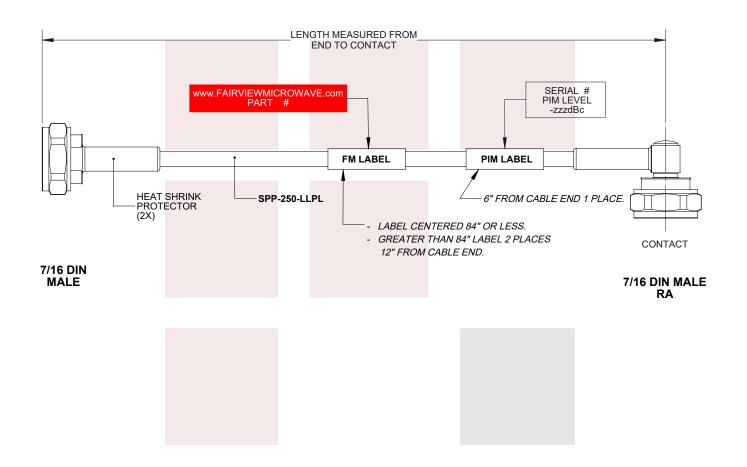

STANDARD TOLERANCES
.X ±0.2
.XX ±0.01

.XXX ±0.005

\*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

Fairview Microwave NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

3. DIMENSIONS ARE IN INCHES [mm]. TITLE DWG NO CAGE CODE 3FKR5 FMCA1306 Low PIM RA 7/16 DIN Male to 7/16 DIN Male Plenum Cable SPP-250-LLPL Coax in 24 Inch CAD FILE 12/05/18 SHEET 1 OF 1 SCALE N/A SIZE A 7361