

FMCA2920-36 DATA SHEET

3.5mm Male to 3.5mm Male Cable Using RG405 Coax in 36 Inch Length

The 3.5mm male to 3.5mm male 36 inch cable using RG405 type .086 coax, part number FMCA2920-36, from Fairview Microwave is in-stock and ships same day. This Fairview 3.5mm to 3.5mm cable assembly has a male to male gender configuration with 50 ohm semi-rigid FM-SR086CU-STR coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.



Configuration:

- 3.5mm Male
- 3.5mm Male
- FM-SR086CU-STR

Applications:

- General Purpose
- Laboratory Use

Mechanical Specifications

Cable Assembly

Length* Weight 36 in [914.4 mm] 0.071 lbs [32.21 g]

Cable

Cable Type Impedance

Inner Conductor Type

Inner Conductor Material and Plating

Dielectric Type Number of Shields Shield Layer 1 FM-SR086CU-STR 50 Ohms

Solid

Copper Clad Steel, Silver

PTFE 1

Copper

Connectors

Description	Connector 1	Connector 2			
Туре	3.5mm Male	3.5mm Male			
Impedance	50 Ohms	50 Ohms			
Contact Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold			
Contact Plating Spec.	ASTM-B488, 50μ in. minimum ASTM-B488, 50μ in.				
minimum					
Dielectric Type	PCTFE	PCTFE			
Body Material & Plating	Passivated Stainless Steel	Passivated Stainless Steel			
Body Plating Spec.	SAE-AMS-2700	SAE-AMS-2700			
Coupling Nut Material & Pla	ting Passivated Stainless Steel	Passivated Stainless Steel			
Coupling Nut Plating Spec.	SAE-AMS-2700	SAE-AMS-2700			
Hex Size	5/16 in.	5/16 in.			
Torque	8 in-lbs 0.9 Nm	8 in-lbs 0.9 Nm			

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Values at 25°C, sea level.

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





How to Order

Part Number Configuration:	FMCA2920	- xx	uu	
			<u> </u>	cm = Centimeters <blank> = Inches</blank>
				—— Length

Example: FMCA2920-12 = 12 inches long cable

FMCA2920-100cm = 100 cm long cable

3.5mm Male to 3.5mm Male Cable Using RG405 Coax in 36 Inch Length from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: 3.5mm Male to 3.5mm Male Cable Using RG405 Coax in 36 Inch Length FMCA2920-36


URL: https://www.fairviewmicrowave.com/3.5mm-male-to-3.5mm-male-cable-rg405-type-.086-coax-fmca2920-36-p. aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





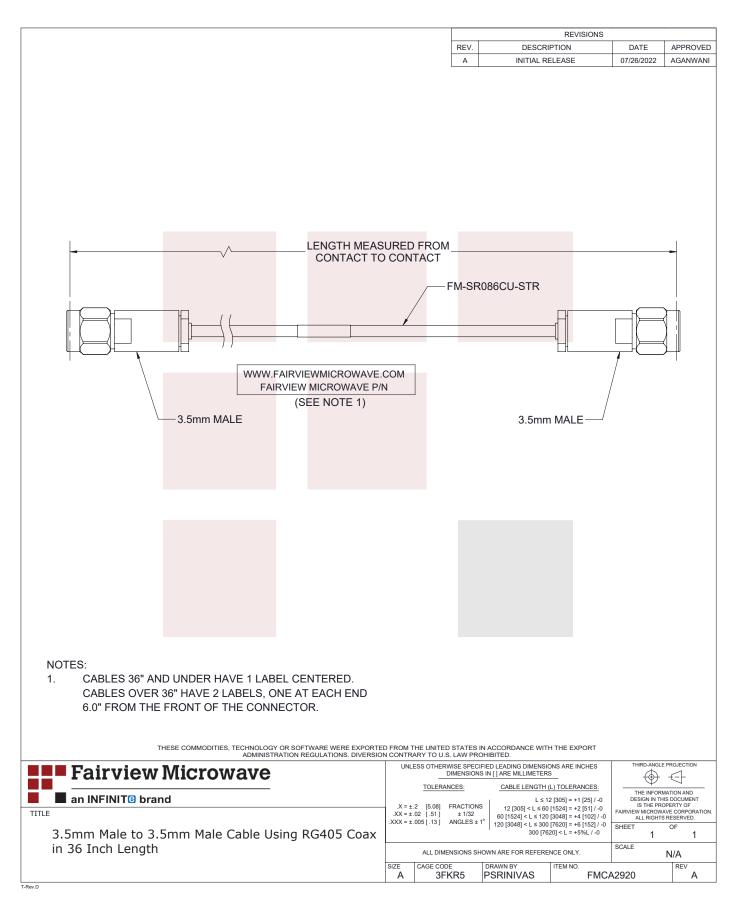

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689