

# FMCN45875 DATA SHEET

## SMB Jack Bulkhead Non-Magnetic Connector Crimp/ Solder Attachment for RG316 Cable

SMB Jack Bulkhead Non-Magnetic Bulkhead Connector Crimp/Solder Attachment for RG316 Cable, part number FMCN45875, from Fairview Microwave is in-stock and ships same day. This SMB jack connector operates up to a maximum frequency of 4 GHz and offers excellent VSWR of 1.13:1. Fairview's FMCN45875 bulkhead SMB connector enables designers to make external connections on product enclosures, and can be used in a variety of other rack mount and panel mount applications. Fairview's Non Magnetic connectors are manufactured with materials that are especially adapted to non magnetism. Our non-magnetic connectors have a susceptibility of around  $10^{-5}$ , as opposed to  $10^{-2}$  for standard connectors made of brass/nickel materials. As a result, our non-magnetic connectors are transparent to the magnetic field, which means no field distortion and a higher Signal-to-Noise Ratio (SNR).

Fairview's SMB jack bulkhead connector FMCN45875 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.

### **Electrical Specifications**

Description	Min	Тур	Max	Units
Frequency Range	DC		4	GHz
VSWR			1.13:1	
Insertion Loss			0.25	dB
Operating Voltage (AC)			500	Vrms
DWV (AC)			1,000	Vrms
Insulation Resistance	1,000			MOhms
RF Leakage	57			dB

#### **Mechanical Specifications**

#### Size

 Length
 0.429 in [10.9 mm]

 Width/Dia.
 0.207 in [5.26 mm]

 Height
 0.207 in [5.26 mm]

 Weight
 0.00132 lbs [0.6 g]

 Mating Cycles
 500 Cycles

#### **Material Specifications**

Description	Material	Plating	
Contact	Bronze	Gold over Copper	
Body	Bronze	Copper-Tin-Zinc Alloy	



## **Configuration:**

- SMB Jack Connector
- 50 Ohms
- Straight Body Geometry
- RG316 Interface Type
- Crimp/Solder Attachment
- Bulkhead
- Non-Magnetic Design

### **Features:**

- Operating Frequency of 4 GHz Max.
- Excellent VSWR of 1.13:1
- Gold over Copper Plated Bronze Contact
- Magnetic Susceptibility 10<sup>-5</sup>

## **Applications:**

- General Purpose Test
- Rack and Panel Mount Applications
- Custom Cable Assemblies
- Medical
- Military and Aerospace
- Quantum Computing

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





## **Environmental Specifications**

Temperature


Operating Range -65 to +165 deg C

**Compliance Certifications** (see product page for current document)

### **Plotted and Other Data**

Notes:

### **Assembly Instruction**

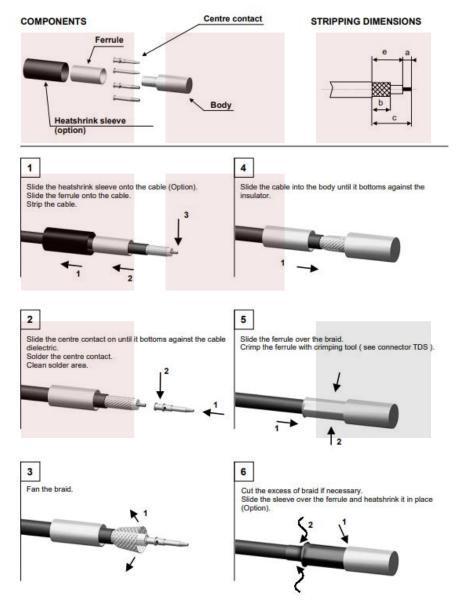





SMB Jack Bulkhead Non-Magnetic Connector Crimp/Solder Attachment for RG316 Cable from Fairview Microwave is instock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: SMB Jack Bulkhead Non-Magnetic Connector Crimp/Solder Attachment for RG316 Cable FMCN45875

URL: https://www.fairviewmicrowave.com/smb-jack-rg316-connector-fmcn45875-p.aspx



301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





