

SMP MALE THREAD IN SHROUD

FULL DETENTE

SC5512


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-40 GHZ
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55° to +125°C

MECHANICAL:

MATERIAL: PASSIVATED S STEEL
INTERFACE: SMP DESC 94007
FULL DETENTE
FORCE TO ENGAGE: 15.0 LBS MAX
FORCE TO DISENGAGE: 5.0 LBS MIN
ROHS COMPLIANT

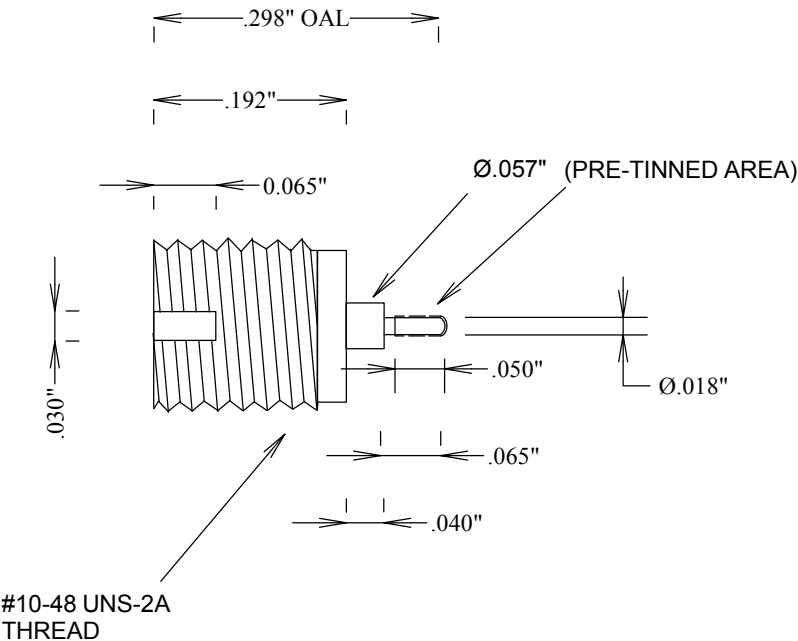

FAIRVIEW MICROWAVE INC.				
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM				
TITLE				
SMP MALE THREAD IN SHROUD FULL DETENTE				
SIZE	CAGE CODE	DWG NO	REV	
A	3FKR5	SC5512	--	
SCALE			SHEET	