

SM4960 DATA SHEET

SMA Male to SMA Male Adapter

SMA male to SMA male adapter part number SM4960 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA adapter has a male to male gender configuration and is built of durable stainless steel. SM4960 SMA male to SMA male adapter operates to 18 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		18	GHz
VSWR			1.2:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

 Size

 Length
 0.875 in [22.23 mm]

 Weight
 0.015 lbs [6.8 g]

Description	Connector 1	Connector 2	
Туре	SMA Male	SMA Male	
Polarity	Standard	Standard	
Interface Specification	MIL-STD-348	MIL-STD-348	
Contact Captivation Method	Ероху	Ероху	
Mating Cycles	500	500	
Mating Torque	8 to 10 in-lbs	8 to 10 in-lbs	
	[0.90 to 1.13 Nm]	[0.90 to 1.13 Nm]	

Material Specifications

Description	Connector 1	Connector 2		
Туре	SMA Male	SMA Male		
Contact Material	Beryllium Copper	Brass		
Contact Plating	Gold	Gold		
Contact Plating Spec.	MIL-G-45204	MIL-G-45204		
Insulation Material	PTFE	PTFE		
Body Material	Passivated Stainless Steel	Passivated Stainless Steel		



Configuration:

- SMA Male Connector 1
- SMA Male Connector 2
- 50 Ohm
- Straight Body Geometry

Features:

- VSWR of 1.2:1 max up to 18 GHz
- SMA interface meets MIL-STD-348
- Epoxy captivation
- Contact plating according to MIL-G-45204
- Gold Plated Contact

Applications:

General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Environmental Specifications

Temperature


Operating Range -55 to +115 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

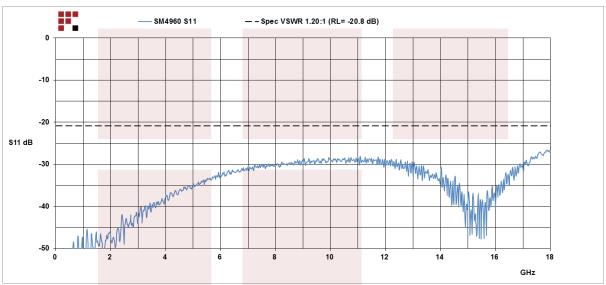

SMA Male to SMA Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: SMA Male to SMA Male Adapter SM4960

URL: https://www.fairviewmicrowave.com/sma-male-sma-male-adapter-sm4960-p.aspx


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2016 REV 6.1 Page 2 of 3





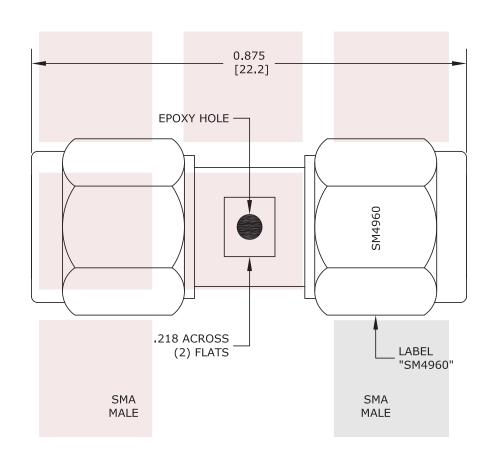

STANDARD TOLERANCES
.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
SMA Male to SMA Male Adapter	DWG NO	SM4960	P960			FKR5
,	CAD FILE 101316	SHEET	SCAL	E N/A	SIZE A	41742