

Medium Power Amplifier at 2 Watt P1dB Operating From 7.5 GHz to 11 GHz with 25 dB Gain and SMA

Electrical Specifications (TA = +25°C , DC Voltage = 5Volts , DC Current = 1,300mA)

Description	Min	Typ	Max	Unit
Frequency Range	7.5		11	GHz
Small Signal Gain		25		dB
Gain Flatness		±2		dB
P1dB		+33		dBm
Noise Figure			10	dB
Operating DC Voltage		5		Volts
Operating DC Current		1,300		mA
Operating Temperature Range	-40		+85	°C

Absolute Maximum Rating

Configuration

- Connector 1
- Connector 2

SMA Female
SMA Female

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

Plotted and Other Data

Notes:

- Values at 25 °C, sea level

Power Data


Medium Power Amplifier at 2 Watt P1dB Operating From 7.5 GHz to 11 GHz with 25 dB Gain and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Medium Power Amplifier at 2 Watt P1dB Operating From 7.5 GHz to 11 GHz with 25 dB Gain and SMA SPA-110-25-05-SMA](http://www.fairviewmicrowave.com/medium-power-amplifier-2watt-25db-spa-110-25-05-sma)

URL: <http://www.fairviewmicrowave.com/medium-power-amplifier-2watt-25db-spa-110-25-05-sma-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

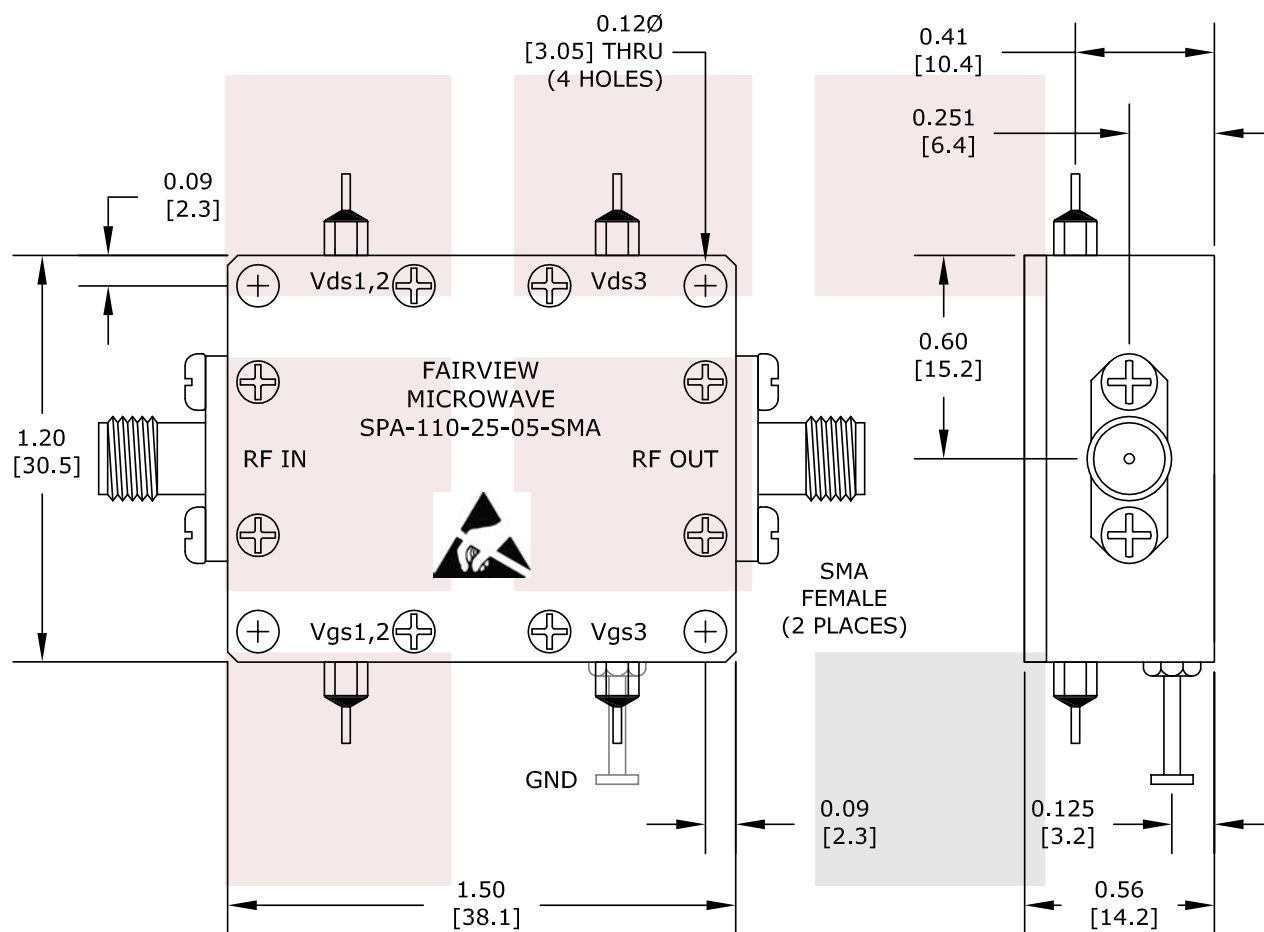

NOTE:
HEAT SINK REQUIRED FOR PROPER OPERATION,
UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

Medium Power Amplifier at 2 Watt P1dB Operating
Frequency 7.5 GHz to 11.0 GHz with 25 dB Gain and SMA
25dB Gain 37 dBm Psat SMA

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG NO

SPA-110-25-05-SMA

CAGE CODE

3FKR5

CAD FILE

022814

SHEET

SCALE N/A

SIZE A

150