

SPA-110-28-025-SMA DATA SHEET

Medium Power Amplifier at 1 Watt P1dB Operating From 8 GHz to 11 GHz with 25 dB Gain and SMA

Electrical Specifications (TA = +25°C , DC Voltage = 5Volts , DC Current = 2,000mA)

Description	ı	Min	Тур	Max	Unit
Frequency Range		8		11	GHz
Small Signal Gain			25		dB
Gain Flatness			±2		dB
P1dB			+31		dBm
Noise Figure				10	dB
Operating DC Voltage			5		Volts
Operating DC Current			2,000		mA
Operating Temperature Ra	nge	-40		+85	°C

Absolute Maximum Rating

Configuration

• Connector 1

• Connector 2

SMA Female

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

Plotted and Other Data

Notes:

· Values at 25 °C, sea level

Power Data

Medium Power Amplifier at 1 Watt P1dB Operating From 8 GHz to 11 GHz with 25 dB Gain and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF ondemand.

For additional information on this product, please click the following link: Medium Power Amplifier at 1 Watt P1dB Operating From 8 GHz to 11 GHz with 25 dB Gain and SMA SPA-110-28-025-SMA

URL: http://www.fairviewmicrowave.com/medium-power-amplifier-1watt-25db-spa-110-28-025-sma-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com



SPA-110-28-025-SMA DATA SHEET

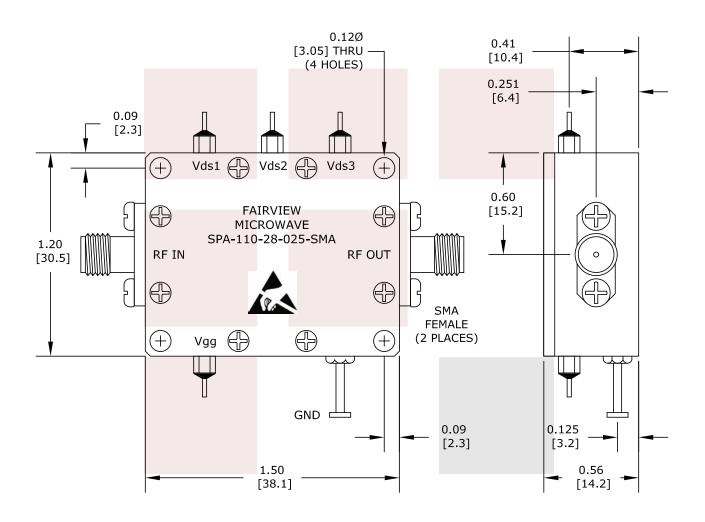

NOTE: HEAT SINK REQUIRED FOR PROPER OPERATION, UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TI 3. DIMENSIONS ARE IN INCHES [mm].								
Medium Power Amplifier at 1 Watt P1dB Operating 2.5いる代われる はH2H2の対け、のる中での対け、のるのでは、Mplifier		DWG NO SPA-110-28-025-SMA				CAGE CODE 3FKR5		
25 dB Gain 34 dBm Psat SMA	CAD FILE	022814	SHEET	SCAL	E N/A	SIZE A	150	