

L-band Omni Antenna 1.15 GHz to 1.4 GHz, N Type Male, IP65 Rated

Description

The FMANOM1140 is an L-band Omnidirectional Antenna, proudly presented by Fairview Microwave cutting-edge solution for military antennas and unmanned vehicle applications. Operating in the frequency range of 1.15 GHz to 1.4 GHz, this antenna ensures superior communication performance. Constructed with precision using top-tier materials, the FMANOM1140 features a robust N-male connector, providing unparalleled connectivity. Its stable 3.5 dBi gain makes it a reliable choice for mission-critical operations.

The FMANOM1140 utilizes a collinear dipole array radiator with an integrated balun, ensuring ground plane independence and suitability for any mounting platform, such as manpacks and mobile electronic devices. Designed and intended for use in extreme operational conditions, this antenna from Fairview Microwave sets the standard for excellence in military communication and unmanned vehicle applications. The 1.15 to 1.4 GHz frequency band is strategically chosen, aligning with crucial military and government communication requirements. Additionally, L-band antennas, known for their versatility, find wide application in military and avionics systems, including radar, navigation, and data link systems.

Configuration

Design	Portable
Gain	4
Polarization	Vertical
Connector Type	N Male
Number of Ports	1

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	1,150		1,400	MHz
Input VSWR			2:1	
Impedance		50		Ohms
Gain	3.5	4	5	dBi
Input Power			20	Watts

Mechanical Specifications

Size	
Length	16.5 in [419.1 mm]
Width	1 in [25.4 mm]
Height	1 in [25.4 mm]
Weight	0.5 lbs [226.8 g]

Environmental Specifications

Temperature	
Operating Range	-31 to +51 deg C
Storage Range	-31 to +71 deg C
Wind Loading	62.14 MPH [100 KPH]
Shock	20 G / 10 mS X, Y, Z axes
Vibration	MIL-STD-167-1 type 1



Features:

- L-band 1150 MHz to 1400 MHz
- N-type Male RF Connector
- Stable 3.5 dBi gain typical
- Ground plane independent
- Precision Construction
- IP65 Rated

Applications:

- L-band
- Military Communication
- Unmanned Operations
- Manpack Radio Systems
- Secure Communications
- Defense and Strategic Installations
- Surveillance Systems

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Ingress Protection


IP65

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:

Gain

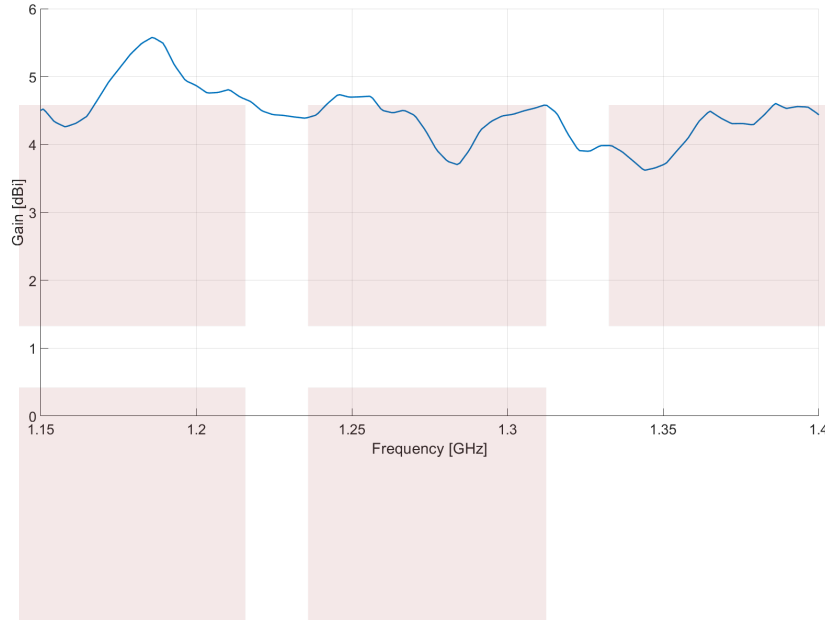

VSWR

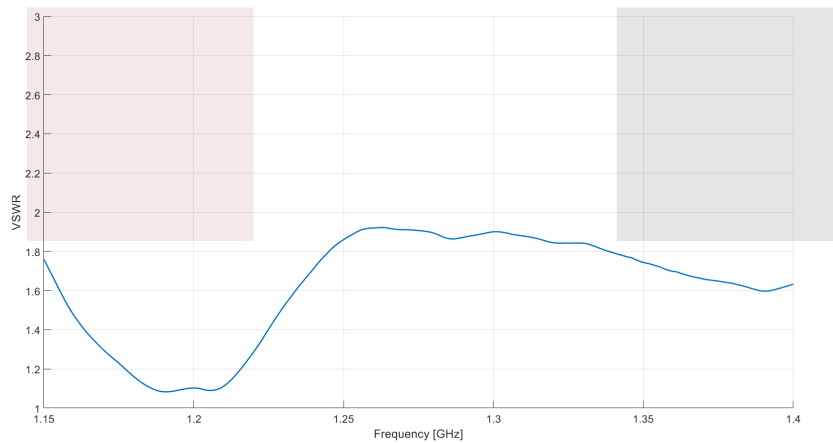

L-band Omni Antenna 1.15 GHz to 1.4 GHz, N Type Male, IP65 Rated from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [L-band Omni Antenna 1.15 GHz to 1.4 GHz, N Type Male, IP65 Rated FMANOM1140](#)

URL: <https://www.fairviewmicrowave.com/l-band-omni-antenna-1.15-ghz-to-1.4-ghz-n-type-male-ip65-rated-fmanom1140-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



