

FMCA2728-60 DATA SHEET

SMA Male to N Female Cable in 60 Inch Length Using RG223 Coax

The SMA male to type N female cable using RG223 coax, part number FMCA2728-60, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to type N cable assembly has a male to female gender configuration with 50 ohm flexible RG223 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA2728-60 SMA male to type N female cable assembly operates to 5.8 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Т	ур	Мах	U	Inits
Frequency Range	DC			5.8		GHz
VSWR				1.4:1		
Velocity of Propagation		(66			%
Capacitance		30.8 [101.05]		pF/fl	: [pF/m]
Operating Voltage (AC)				500	V	′rms

Performance by Frequency

			F4	F5	Units
0.25	0.5	1	2.5	5.8	GHz
0.51	0.65	0.87	1.3	2.01	dB/ft
1.67	2.13	2.85	4.27	6.59	dB/m
	0.51	0.51 0.65	0.51 0.65 0.87	0.51 0.65 0.87 1.3	0.51 0.65 0.8 7 1.3 2.01

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable	Assembly
	N

Length* Weight

Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 60 in [152.4 cm] 0.231 lbs [104.78 g]

RG223 50 Ohms Solid Copper, Silver PE 2 Silver Plated Copper Braid



Configuration:

- SMA Male
- N Female
- RG223

Features:

- Max Frequency 5.8 GHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com Fairview Microwave





Shield Layer 2	Silver Plated Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.21 in [5.33 mm]

One Time Minimum Bend Radius

1 in [25.4 mm]

Connectors

Description	Connector 1	Connector 2	
Туре	SMA Male	N Female	
Specification	MIL-STD-348A	MIL-STD-348A MIL-STD-348A	
Impedance	50 Ohms	50 Ohms	
Contact Material & Plating	Brass, Gold	Brass, Gold	
Contact Plating Spec.	50µ in. minimum	30µ in. minimum	
Dielectric Type	Teflon	Teflon	
Body Material & Plating	Brass, Nickel	Brass, Nickel	
Body Plating Spec.	100µ in. minimum	100µ in. minimum	
Hex Size	5/16 in		
Torque	5 in-lbs 0.57 Nm	l	

Compliance Certifications (see product page for current document)


Plotted and Other Data

Notes:

• Values at 25°C, sea level.

How to Order

Part Number Configuration:

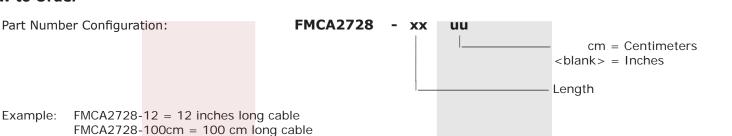

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





SMA Male to N Female Cable in 60 Inch Length Using RG223 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SMA Male to N Female Cable in 60 Inch Length Using RG223 Coax FMCA2728-60


URL: https://www.fairviewmicrowave.com/sma-male-to-n-female-cable-rg223-coax-in-60-inch-and-rohs-fmca2728-60-p. aspx



301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





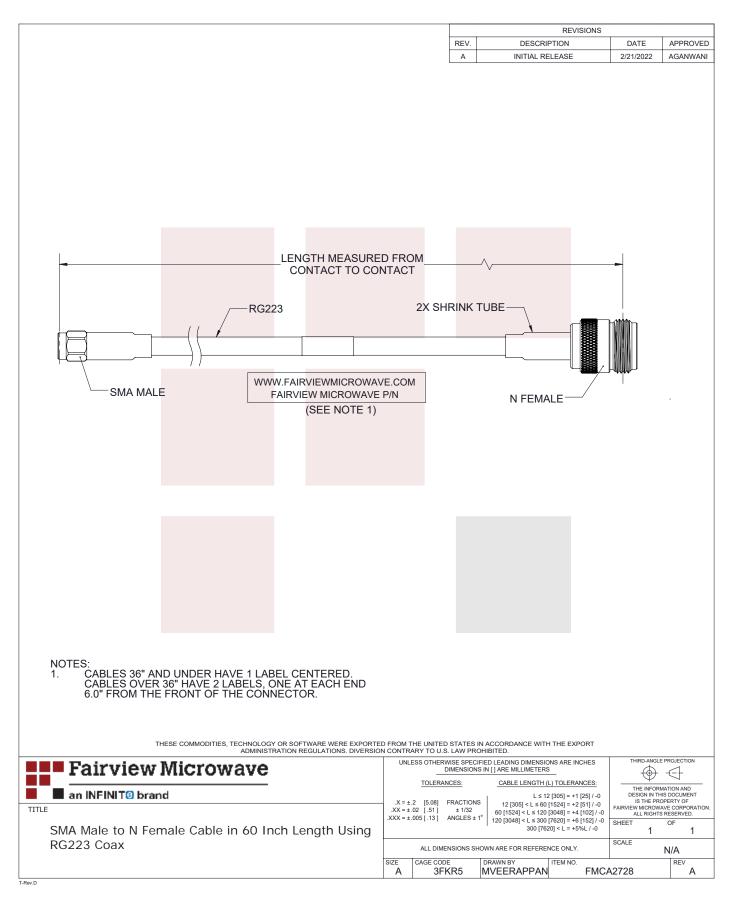

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689