

SMA Male Right Angle to TNC Female Cable in 150 CM Length Using RG223 Coax

The RA SMA male to TNC female cable using RG223 coax, part number FMCA2739-150CM, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to TNC cable assembly has a male to female gender configuration with 50 ohm flexible RG223 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The right angle SMA interface on the RG223 cable allows for easier connections in tight spaces. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

. . Ε

Description	Min	Тур	Max	Units
Velocity of Propagation		66		%
Capacitance		30.8 [<mark>101.0</mark>	5]	pF/ft [pF/m]
chanical Specificati	ons			
Cable Assembly				
Length*		59.06 in [150.01 cm]		
Weight		0.1636 lbs [74.21 g]		
Cable Cable Type Impedance Inner Conductor Type Inner Conductor Materi Dielectric Type Number of Shields Shield Layer 1	al and Plating	RG223 50 Ohms Solid Copper, Silver PE 2 Silver Plated Copper Braid		
Shield Layer 1 Shield Layer 2 Jacket Material Jacket Diameter		Silver Pl PVC, Bla	ated Copp	ber Braid
One Time Minimum Ber	nd Radius	1 in [25	.4 mm]	





Configuration:

- SMA Male Right Angle
- TNC Female
- RG223

Features:

- 66% Phase Velocity
- Double Shielded
- PVC Jacket

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com

Fairview Microwave

an INFINIT[©] brand



Connectors

	Connector 1	Connector 2	_
Туре	SMA Male	TNC Female	-
Specification	MIL-STD-348A		_
Impedance	50 Ohms	50 Ohms	_
Contact Material & Plating	Brass, Gold		_
Contact Plating Spec.	50µ in. minimum		_
Dielectric Type	Teflon		_
Body Material & Plating	Brass, Nickel	Brass, Nickel	_
Body Plating Spec.	100µ in. minimum		_
Hex Size	5/16 in		_
Torque	5 in-lbs 0.57 Nm		—
tted and Other Data			
tted and Other Data Notes: • Values at 25°C, sea level.			
Notes:			
Notes: • Values at 25°C, sea level.	: FN	1CA2739 - xx u	uu cm = Centimeto <blank> = Inches Length</blank>

SMA Male Right Angle to TNC Female Cable in 150 CM Length Using RG223 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SMA Male Right Angle to TNC Female Cable in 150 CM Length Using RG223 Coax FMCA2739-150CM


URL: https://www.fairviewmicrowave.com/ra-sma-male-to-tnc-female-cable-rg223-coax-in-150-cm-and-rohs-fmca2739-150cm-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

an INFINIT© brand



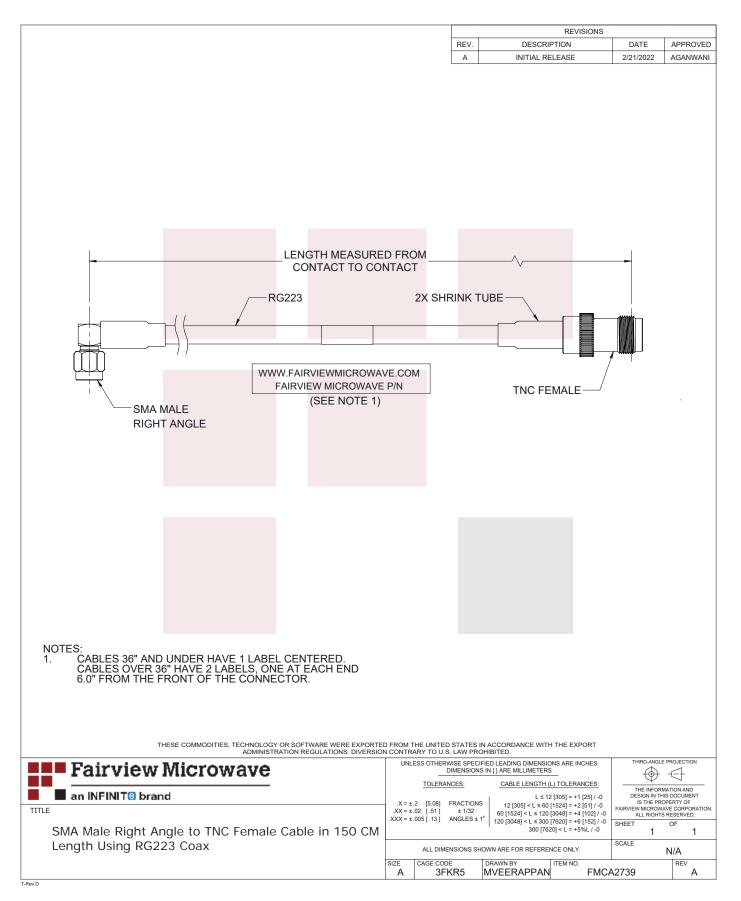

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689