

## RA 4.3-10 Male Connector Solder Attachment For SPP-250-LLPL Cable Low PIM

RA 4.3-10 male connector with solder/solder attachment for SPP-250-LLPL, part number FMCN1434, from Fairview Microwave is in-stock and ships same day. This 4.3-10 male connector operates up to a maximum frequency of 6 GHz and offers good VSWR of 1.3:1. The 4.3-10 male connector also has low passive intermodulation (PIM) of -170 dBc. Its right angle body geometry facilitates connections in tight spaces.

Fairview's RA 4.3-10 male connector FMCN1434 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.

### Electrical Specifications

| Description             | Min   | Typ | Max   | Units |
|-------------------------|-------|-----|-------|-------|
| Frequency Range         | DC    |     | 6     | GHz   |
| VSWR                    |       |     | 1.3:1 |       |
| Insertion Loss          |       |     | 0.1   | dB    |
| Passive Intermodulation |       |     | -170  | dBc   |
| Operating Voltage (AC)  |       |     | 250   | Vrms  |
| Insulation Resistance   | 5,000 |     |       | MOhms |

Electrical Specification Notes:  
Insertion Loss is  $0.04 * \sqrt{f(\text{GHz})}$

### Mechanical Specifications

Weight 0.0957 lbs [43.41 g]

### Material Specifications

| Description    | Material         | Plating   |
|----------------|------------------|-----------|
| Contact        | Brass            | Silver    |
| Insulation     | PTFE             |           |
| Body           | Brass            | Tri-Metal |
| Coupling Nut   | Brass            | Tri-Metal |
| Retaining Ring | Beryllium Copper |           |
| Gasket         | Silicone Rubber  |           |



### Configuration:

- 4.3-10 Male Connector
- 50 Ohms
- Right Angle Body Geometry
- SPP-250-LLPL Interface Type
- Solder/Solder Attachment

### Features:

- Operating Frequency of 6 GHz Max.
- Good VSWR of 1.3:1
- PIM levels better than -170 dBc
- Silver Plated Brass Contact

### Applications:

- General Purpose Test
- Custom Cable Assemblies
- Low PIM Interconnects
- Distributed Antenna Systems (DAS)
- Low PIM Jumpers
- Low PIM Testing
- Low PIM Connections

Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

## Environmental Specifications

### Temperature


Operating Range -55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)


## Plotted and Other Data

Notes:


### Assembly Instruction

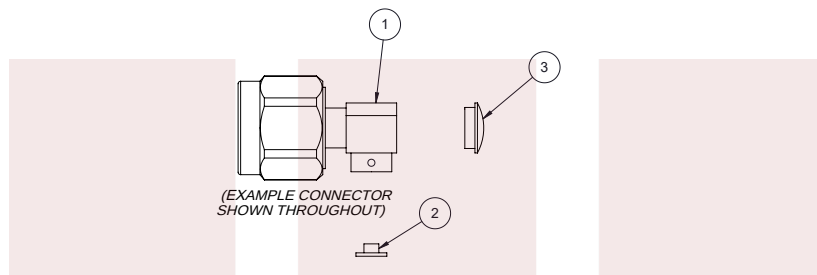


1. STRIP CABLE AS SHOWN, CHAMFER CENTER CONDUCTOR AND DEBURR CABLE.

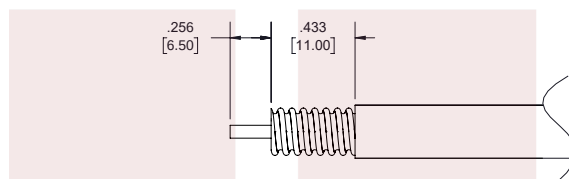

2. SLIDE INSULATOR ② OVER CABLE CENTER CONDUCTOR AND WRAP THE CABLE BY SOLDER WIRE.

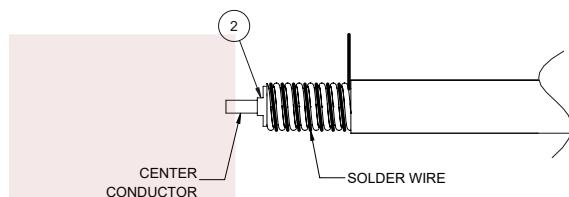

3. PUSH THE CONNECTOR BODY INTO THE CABLE, UNTIL IT STOPS. SOLDER THE CONNECTOR BODY WITH CABLE. SOLDER THE INNER CONDUCTOR. PRESS THE CAP ③ INTO BODY AND COVER HEATSHRINK SLEEVE.

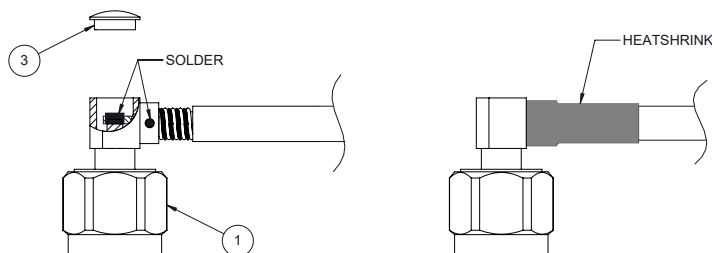


RA 4.3-10 Male Connector Solder Attachment For SPP-250-LLPL Cable Low PIM from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [RA 4.3-10 Male Connector Solder Attachment For SPP-250-LLPL Cable Low PIM FMCN1434](#)

URL: <https://www.fairviewmicrowave.com/4.3-10-male-spp-250-llpl-connector-fmcn1434-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



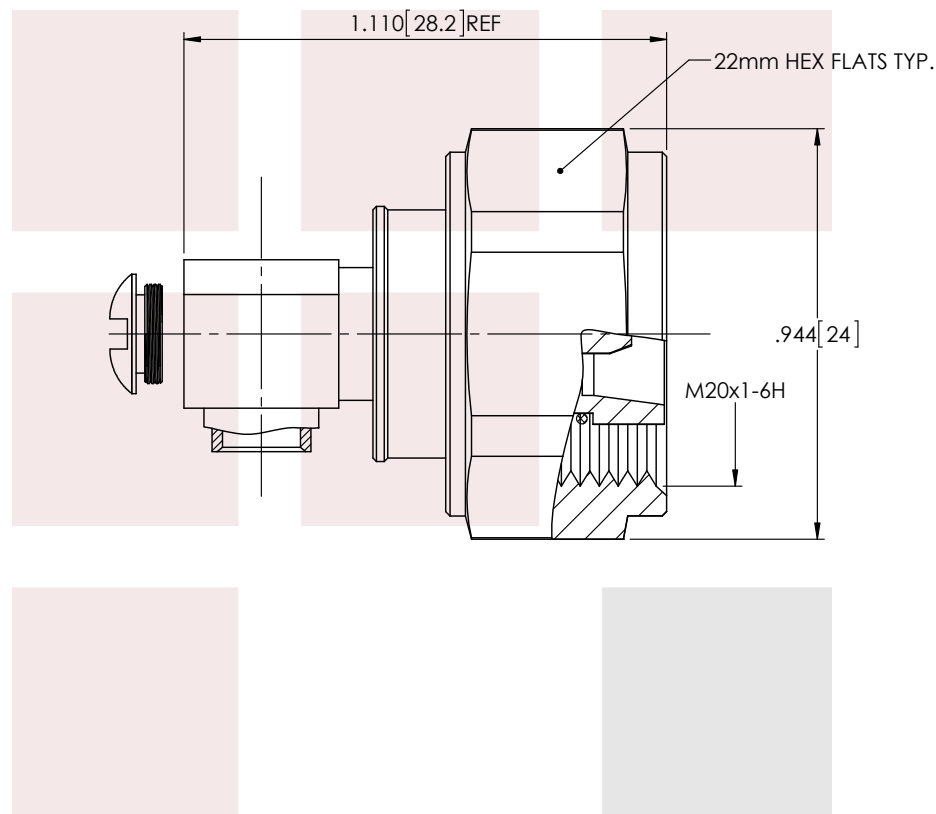

**STANDARD TOLERANCES**

.X  $\pm 0.2$   
.XX  $\pm 0.01$   
.XXX  $\pm 0.005$

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES

**FAIRVIEW MICROWAVE INC.**

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

**TITLE**

RA 4.3-10 Male Connector Solder Attachment For SPP-  
250-LLPL Cable Low PIM

**DWG NO**

D3M21A-A44W01

**CAGE CODE**

3FKR5

CAD FILE 12/14/17

SHEET

SCALE N/A

SIZE A

CN2245