

Dual Junction Isolator SMA Female with 40 dB Isolation from 1.7 GHz to 2.2 GHz Rated to 50 Watts

The FMIR1015 is a dual junction isolator offering 40 dB minimum of isolation over a frequency band of 1.7 to 2.2 GHz. This coaxial part uses SMA female connectors on all ports and has a power rating of 50 Watts in forward and 2 Watts in reverse direction.

Fairview Microwave offers a wide variety of isolators to fit your needs. These are two-port devices that transmit microwave or radio frequency power in one direction only and block the signal in the opposite direction. They can be thought of as a diode for RF energy. Isolators are used to isolate equipment from the effects of conditions outside of the equipment. For instance they are used to prevent a microwave source being detuned by a mismatched load. Fairview's isolators feature excellent insertion loss, high isolation and reliability, low VSWR, and a wide dynamic temperature range.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	1.7		2.2	GHz
Impedance		50		Ohms
Insertion Loss			0.8	dB
Isolation	40			dB
VSWR			1.25:1	
Forward Power, CW			50	Watts
Reverse Power, CW			2	Watts

Mechanical Specifications

Size	
Length	5 in [127 mm]
Width	1.02 in [25.91 mm]
Height	2.85 in [72.39 mm]
Weight	1.7255 lbs [782.67 g]

Configuration

Design	Dual Junction
Package Style	Connectorized
Connector 1	SMA Female
Connector 2	SMA Female

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:



Features:


- High Isolation of 40 dB
- Frequency Range of 1.7 to 2.2 GHz
- Female SMA Connectors
- VSWR of 1.25:1

Applications:

- Radar Systems
- Military
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

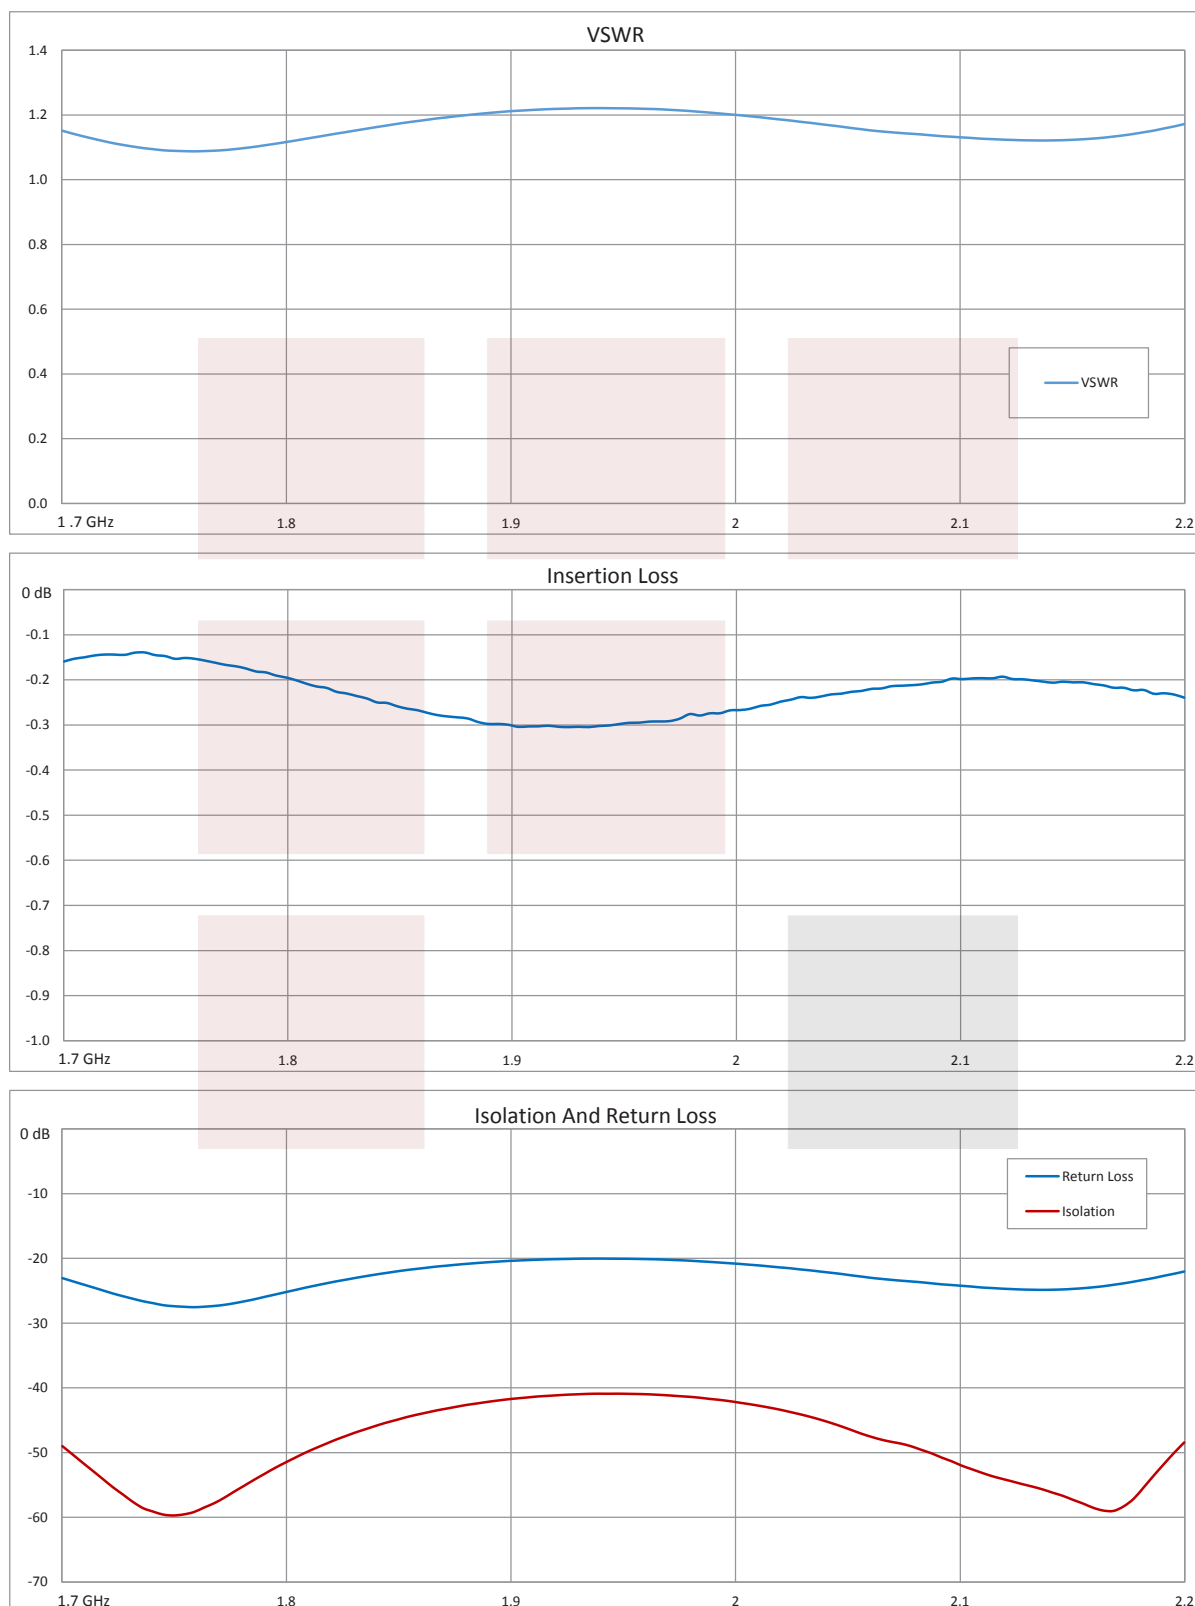



Dual Junction Isolator SMA Female with 40 dB Isolation from 1.7 GHz to 2.2 GHz Rated to 50 Watts from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Dual Junction Isolator SMA Female with 40 dB Isolation from 1.7 GHz to 2.2 GHz Rated to 50 Watts FMIR1015](#)

URL: <https://www.fairviewmicrowave.com/dual-junction-isolator-sma-female-40db-isolation-2.2-ghz-50-watts-fmir1015-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

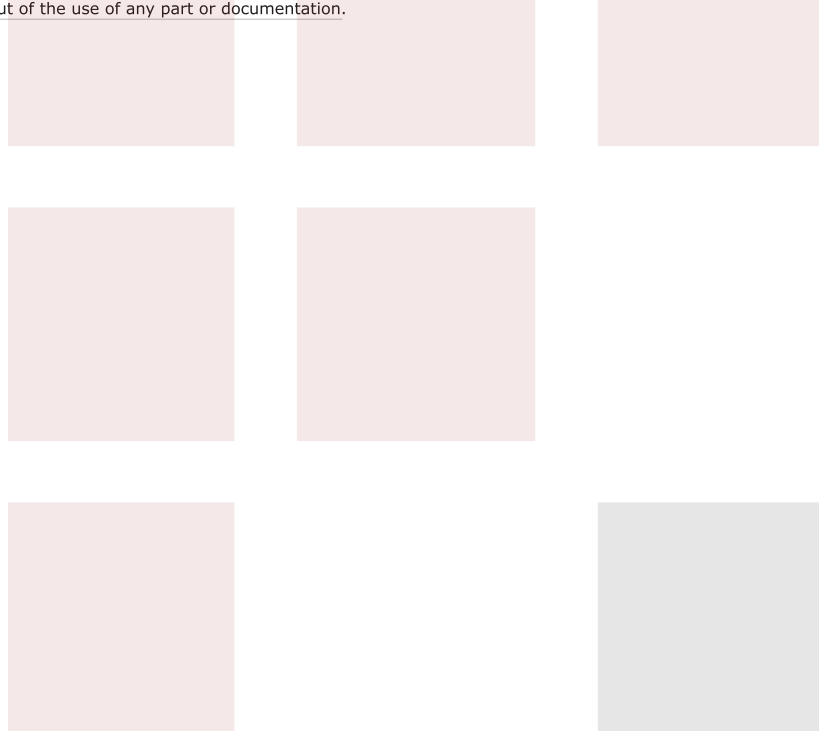

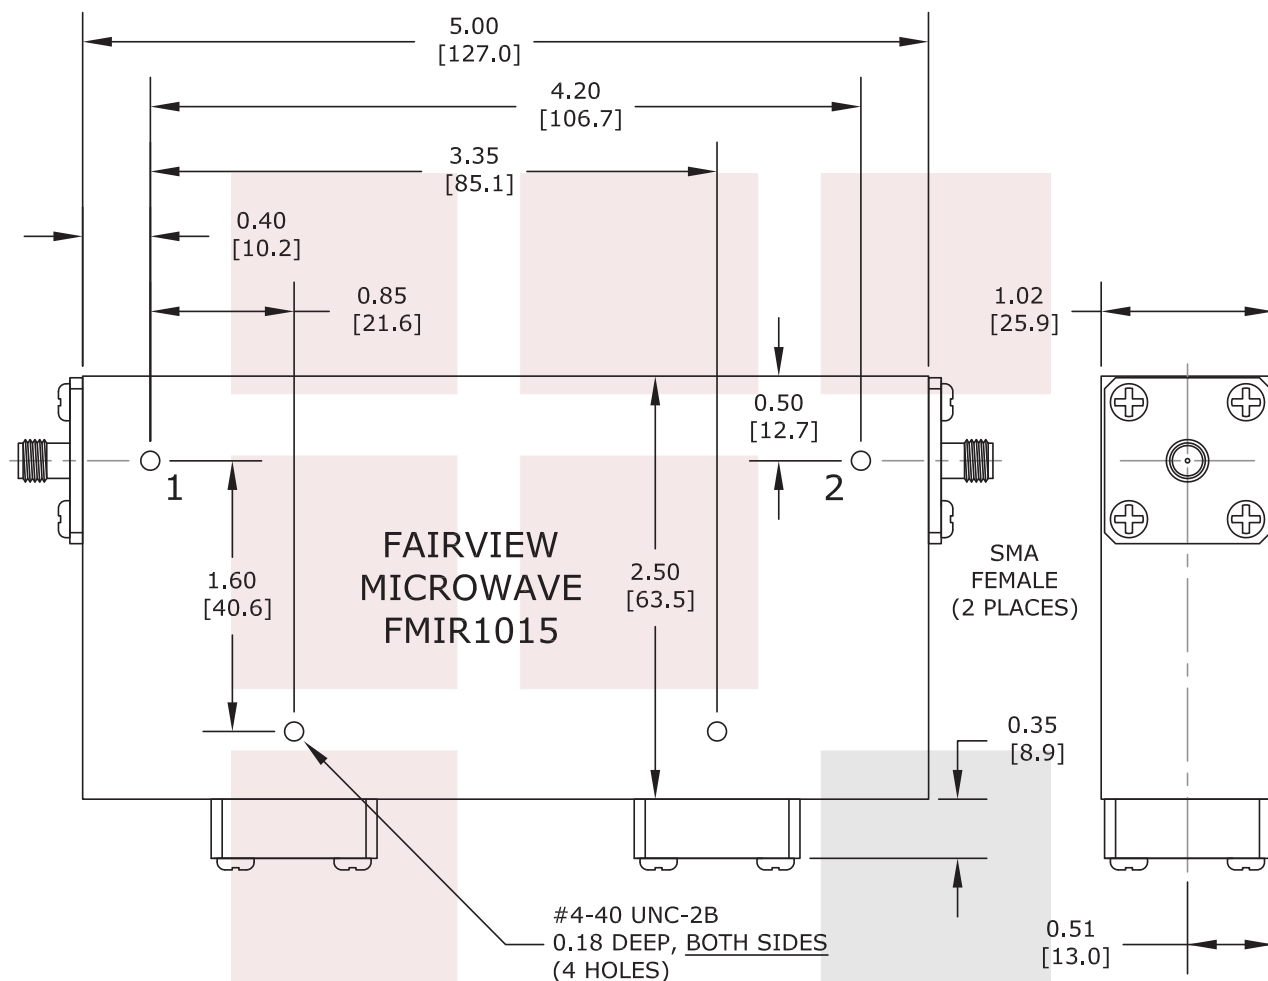

FAIRVIEW MICROWAVE INC.
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE
Dual Junction Isolator SMA Female with 40 dB
Isolation from 1.7 GHz to 2.2 GHz Rated to 50 Watts

DWG NO	FMIR1015	CAGE CODE	3FKR5
CAD FILE	032516	SHEET	SCALE N/A
		SIZE A	2233