ATTENUATORS 2.92 M/F 40GHZ

SA40-XX

SPECIFICATIONS

ELECTRICAL:
- FREQUENCY: 0-40 GHZ
- VSWR @ 26 GHZ: 1.30:1 MAX
- VSWR @ 40GHZ: 1.4:1 MAX
- POWER (AVG) 0.5 WATTS
- POWER (PEAK) 100 WATTS
- IMPEDANCE: 50 OHMS
- ATTENUATION ACCURACY:
  - +/- .5 0-15 DB 0-26GHZ
  - .8 >16 DB 0-26GHZ
  - .6 <15 DB 40GHZ
  - 1. >16 DB 40 GHZ

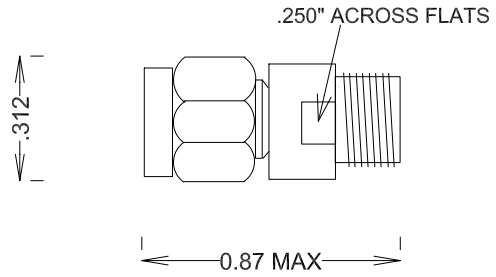

MECHANICAL:
- MATERIAL BODY: PASSIVATED STAINLESS STEEL
- MATERIAL RING & CONTACTS: BeCu
- CENTER CONTACT: GOLD PLATED PER MIL-G-45204
- RESISTIVE ELEMENT: AlNi SUBSTRATE T Ni RESISTOR

ENVIRONMENTAL:

TEMP: -55 C TO +135 C

ROHS COMPLIANT

FAIRVIEW MICROWAVE INC.			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
TITLE: ATTENUATORS 2.92 M/F 40GHZ			
SIZE: A	CAGE CODE: 3FKR5	DWG NO: SA40-XX	REV: A
SCALE			SHEET