

# FMCA1214LF DATA SHEET

# Low Loss N Male to N Male Cable LMR-240-UF Coax with LF Solder

The type N male to type N male cable using LMR-240-UF coax, part number FMCA1214LF, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240-UF coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1214LF type N male to type N male cable assembly operates to 4 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### **Electrical Specifications**

Description	Min	Т	ур	Max	ι	Inits	
Frequency Range	DC			4		GHz	
VSWR				1.35:1			
Velocity of Propagation		84		%			
RF Shielding	90					dB	
Capacitance		24.2 [79.4]		pF/ft [pF/m]			
Inductance		0.06	[0.2]		uH/f	t [uH/m]	
DC Resistance Inner Conductor		4.28 [14.04]		Ω/1000ft [Ω/Km]			
DC Resistance Outer Conductor		3.89 [12.76]			Ω/1000ft [Ω/Km]		

#### **Mechanical Specifications**

#### **Cable Assembly**

Length\* Weight 0 in [0 mm]

0.16016 lbs [72.65 g]

#### Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1
Shield Layer 2
Jacket Material
Jacket Diameter

LMR-240-UF 50 Ohms Solid Copper PE (F) 2

Tinned Copper Aluminum Tape PE, Black

0.24 in [6.1 mm]



## **Configuration:**

- N Male
- N Male
- LMR-240-UF

#### **Features:**

- Max Frequency 4 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

### **Applications:**

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com

sales@fairviewmicrowave.com





#### **Connectors**

Connector 1	Connector 2		
N Male	N Male		
Straight	Straight		
50 Ohms	50 Ohms		
Brass	Brass		
PTFE	PTFE		
Brass, Tri-Metal	Brass, Tri-Metal		
	N Male Straight 50 Ohms Brass PTFE		

**Environmental Specifications** 

**Temperature** 

Operating Range

-40 to +85 deg C


Compliance Certifications (see product page for current document)

**Plotted and Other Data** 

Notes:

**How to Order** 

Part Number Configuration:

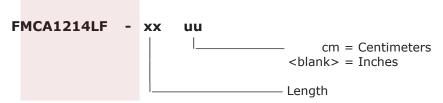

Example: FMCA1214LF-12 = 12 inches long cable

FMCA1214LF-100cm = 100 cm long cable

Low Loss N Male to N Male Cable LMR-240-UF Coax with LF Solder from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low Loss N Male to N Male Cable LMR-240-UF Coax with LF Solder FMCA1214LF

URL: https://www.fairviewmicrowave.com/standard-n-male-n-male-cable-lmr240uf-coax-fmca1214lf-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2020

REV 1.1 Page 2 of 3





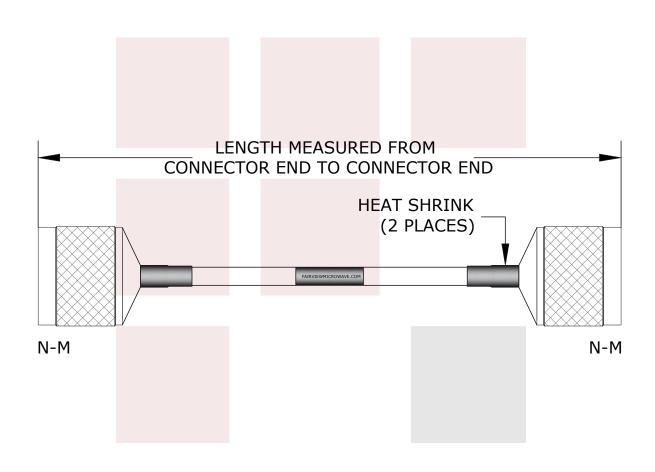

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].						
TITLE Low Loss N Male to N Male Cable LMR-240-UF Coax with LF Solder	DWG NO FMCA1214LF			CAGE CODE 3FKR5			
	CAD FILE 040416	SHEET	SCALE	N/A	SIZE A	5568	