an INFINIT© brand

SCC2620-0202 DATA SHEET

SMA Male to SMA Male Cable FM-F141 Coax

The SMA male to SMA male cable using FM-F141 coax, part number SCC2620-0202, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible FM-F141 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The SCC2620-0202 SMA male to SMA male cable assembly operates to 26.5 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 110 dB. The SMA male to SMA male cable using FM-F141 coax, part number SCC2620-0202, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible FM-F141 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The SCC2620-0202 SMA male to SMA male cable assembly operates to 26.5 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 110 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Тур	Max	Units	
Frequency Range	DC		26.5	GHz	
VSWR			1.5:1		
Velocity of Propagation		70		%	
RF Shielding	110			dB	
Capacitance		29.4 [96.46]]	pF/ft [pF/n	ן]

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	2	12	18	26.5		GHz
Insertion Loss (Typ.)	0.25	0.55	0.75	0.95		dB/ft
	0.82	1.8	2.46	3.12		dB/m

Electrical Specification Notes:

Insertion loss does not include the loss of the connectors.

Insertion loss is estimated as 0.05 x sqrt(fGHz) dB per connector.



Configuration:

- SMA Male
- SMA Male
- FM-F141


Features:

- Max Frequency 26.5 GHz
- Shielding Effectivity > 110 dB
- 70% Phase Velocity
- Double Shielded
- FEP Jacket
- Max Frequency 26.5 GHz
- Shielding Effectivity > 110 dB
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

Applications:

- General Purpose
- Laboratory Use
- General Purpose
- Laboratory Use

Cable Diagram:



Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





cm = Centimeters

<blank> = Inches

- Length

Mechanical Specifications

Cable Assembly Length*		0 in	n [0 mm]				
Cable Cable Type Impedance Inner Conductor Type Inner Conductor Materia Dielectric Type Number of Shields Shield Layer 1	le Type edance er Conductor Type er Conductor Material and Plating ectric Type nber of Shields		FM-F141 50 Ohms Solid Copper, Silver PTFE 2 Silver Plated Copper Tape				
Shield Layer 2 Jacket Material Jacket Diameter		FEP	rer Plated Copper Br 9, Blue 63 in [4.14 mm]	aid			
Repeated Minimum Bend	d Radius	0.8	in [20.32 mm]				

Repeated Minimum Bend Radius

0.8 in [20.32 mm]

Connectors

Description		Connector 1		Connector 2	
Туре		SMA Male		SMA Male	
Configuration		Straight	Straight		
Impedance		50 Ohms		50 Ohms	
Contact Material & Plating		Brass, Gold Brass, Gold		Brass, Gold	
Contact Plating Spec.		20 µin min <mark>imum</mark>		20 µin minimum	
Dielectric Type		PTFE		PTFE	
Body Material & Plating		Passivated Stainless S	Steel	Passivated Stainless Steel	
Coupling Nut Material & Pla	ating	Passivated Stainless S	iteel	Passivated Stainless Steel	
Hex Size		5/16 inch		5/16 inch	
Torque		8 in-lbs 0.9 Nm		8 in-lbs 0.9 Nm	

Environmental Specifications

Temperature Operating Range

-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

SCC2620 - xx



Example: SCC2620-12 = 12 inches long cable SCC2620-100 cm = 100 cm long cable

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

uu |





SMA Male to SMA Male Cable FM-F141 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SMA Male to SMA Male Cable FM-F141 Coax SCC2620-0202

URL: https://www.fairviewmicrowave.com/sma-male-sma-male-cable-hs086-coax-scc2620-0202-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





3FKR5

41742

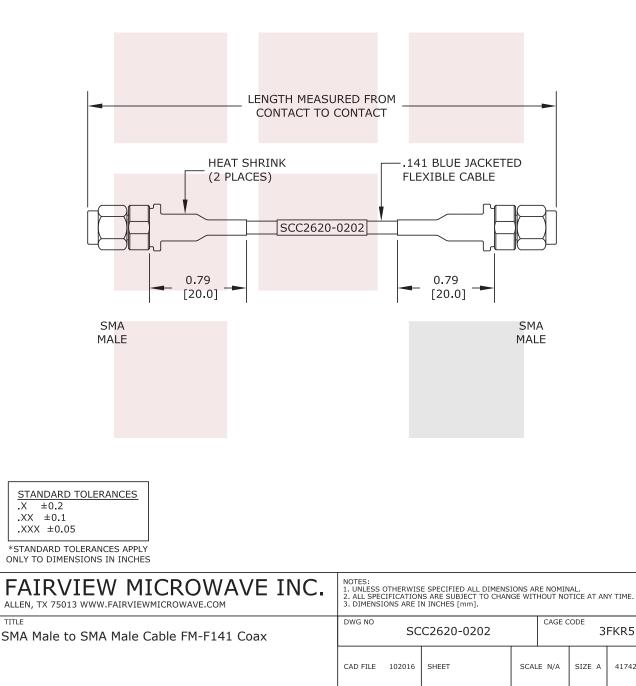

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689