

BMMA Female (Jack) Connector Solder Attachment Snap in for FM-SR086CU, FM-SR086CUTN, FM-SR086ALTN, FM-SR086TB, FM-SR086TBJ, 0.085 Cable



FMCN5136

Configuration

- BMMA Female Connector
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: FM-SR086CU, FM-SR086CUTN, FM-SR086ALTN, FM-SR086TB, FM-SR086TBJ, FM-F086, 0.085 Cable, RG405
- Snap in

Features

- Operating Frequency of 22 GHz Max.
- Good VSWR of 1.35:1
- Gold Plated Beryllium Copper Contact

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

BMMA Female Snap in Mount Standard Snap in Mount Connector Solder Attachment for FM-SR086CU, FM-SR086CUTN, FM-SR086ALTN, FM-SR086TB, FM-SR086TBJ, FM-F086, 0.085 Cable and RG405 Cable, part number FMCN5136, from Fairview Microwave is in-stock and ships same day. This BMMA female connector operates up to a maximum frequency of 22 GHz and offers good VSWR of 1.35:1.

Fairview's BMMA female snap in connector FMCN5136 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		22	GHz
VSWR			1.35:1	
Insertion Loss			0.562	dB
Impedance		50		Ohms

Mechanical Specifications

Size

Length	0.711 in [18.06 mm]
Width	0.3 in [7.62 mm]
Height	0.3 in [7.62 mm]
Weight	0.005 lbs [2.27 g]
Mating Cycles	500 Cycles

BMMA Female (Jack) Connector Solder Attachment
Snap in for FM-SR086CU, FM-SR086CUTN, FM-SR086ALTN, FM-SR086TB, FM-SR086TBJ, 0.085 Cable



FMCN5136

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold
Insulation	PTFE	
Outer Conductor	Beryllium Copper	Gold
Body	Stainless Steel	Gold

Environmental Specifications

Temperature	
Operating Range	-65 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data



Notes:

BMMA Female (Jack) Connector Solder Attachment
Snap in for FM-SR086CU, FM-SR086CUTN, FM-
SR086ALTN, FM-SR086TB, FM-SR086TBJ, 0.085 Cable


FMCN5136



Assembly Instruction

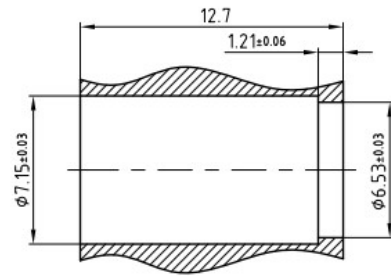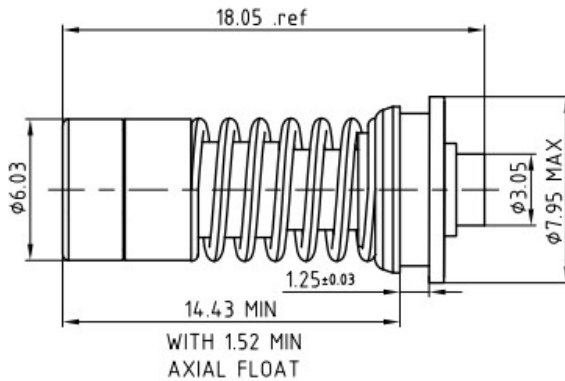


ASSEMBLY PROCEDURES

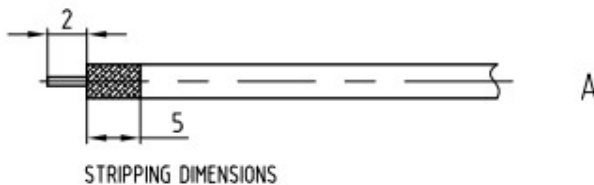

1. STRIP CABLE AS SHOWN IN (A).
DO NOT NICK INNER
CONDUCTOR.

2. PRE-TIN CABLE JACKET TO
APPROXIMATE DIMENSION AS
SHOWN IN (A).

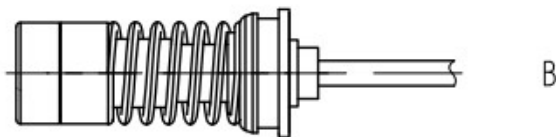

3. INSERT CABLE THRU ADAPTER
UNTIL IT BOTTOMS. SOLDER

BMMA Female (Jack) Connector Solder Attachment
Snap in for FM-SR086CU, FM-SR086CUTN, FM-
SR086ALTN, FM-SR086TB, FM-SR086TBJ, 0.085 Cable



FMCN5136

BMMA Female (Jack) Connector Solder Attachment Snap in for FM-SR086CU, FM-SR086CUTN, FM-SR086ALTN, FM-SR086TB, FM-SR086TBJ, 0.085 Cable from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [BMMA Female \(Jack\) Connector Solder Attachment Snap in for FM-SR086CU, FM-SR086CUTN, FM-SR086ALTN, FM-SR086TB, FM-SR086TBJ, 0.085 Cable FMCN5136](#)

URL: <https://www.fairviewmicrowave.com/bmma-female-.085-cable-connector-fmcn5136-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

SMP Male Bulkhead Smooth Bore CM Connector Solder Attachment For RG405, RG405 Tinned, .086 SR Cable

SMP male smooth bore CM bulkhead connector with solder/solder attachment for RG405, RG405 Tinned and .086 SR, part number SC5161, from Fairview Microwave is in-stock and ships same day. This SMP male connector operates up to a maximum frequency of 40 GHz and offers excellent VSWR of 1.25:1. This blind mate connector is ideal for applications without direct visual or tactile access to the connection point, for example, when two circuit boards need to be mated. Fairview's SC5161 bulkhead SMP connector enables designers to make external connections on product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Fairview's SMP male bulkhead connector SC5161 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		40	GHz
VSWR			1.25:1	

Mechanical Specifications

Size	
Length	0.51 in [12.95 mm]
Width/Dia.	0.23 in [5.84 mm]
Weight	0.00088 lbs [0.4 g]

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold MIL-G-45204
Insulation	PTFE	
Body	Beryllium Copper	Gold MIL-G-45204

Environmental Specifications

Temperature	
Operating Range	-55 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:



Configuration:

- Smooth Bore CM SMP Male Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry
- RG405, RG405 Tinned, .086 SR Interface Type
- Solder/Solder Attachment
- Bulkhead

Features:

- Operating Frequency of 40 GHz Max.
- Excellent VSWR of 1.25:1
- Blind Mate Connector
- Gold Plated Beryllium Copper Contact
- Contact plating according to MIL-G-45204

Applications:

- General Purpose Test
- Rack and Panel Mount Applications
- Custom Cable Assemblies

Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com


SMP Male Bulkhead Smooth Bore CM Connector Solder Attachment For RG405, RG405 Tinned, .086 SR Cable from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMP Male Bulkhead Smooth Bore CM Connector Solder Attachment For RG405, RG405 Tinned, .086 SR Cable SC5161](#)

URL: <https://www.fairviewmicrowave.com/smp-male-standard-smooth-bore-rg405-connector-sc5161-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



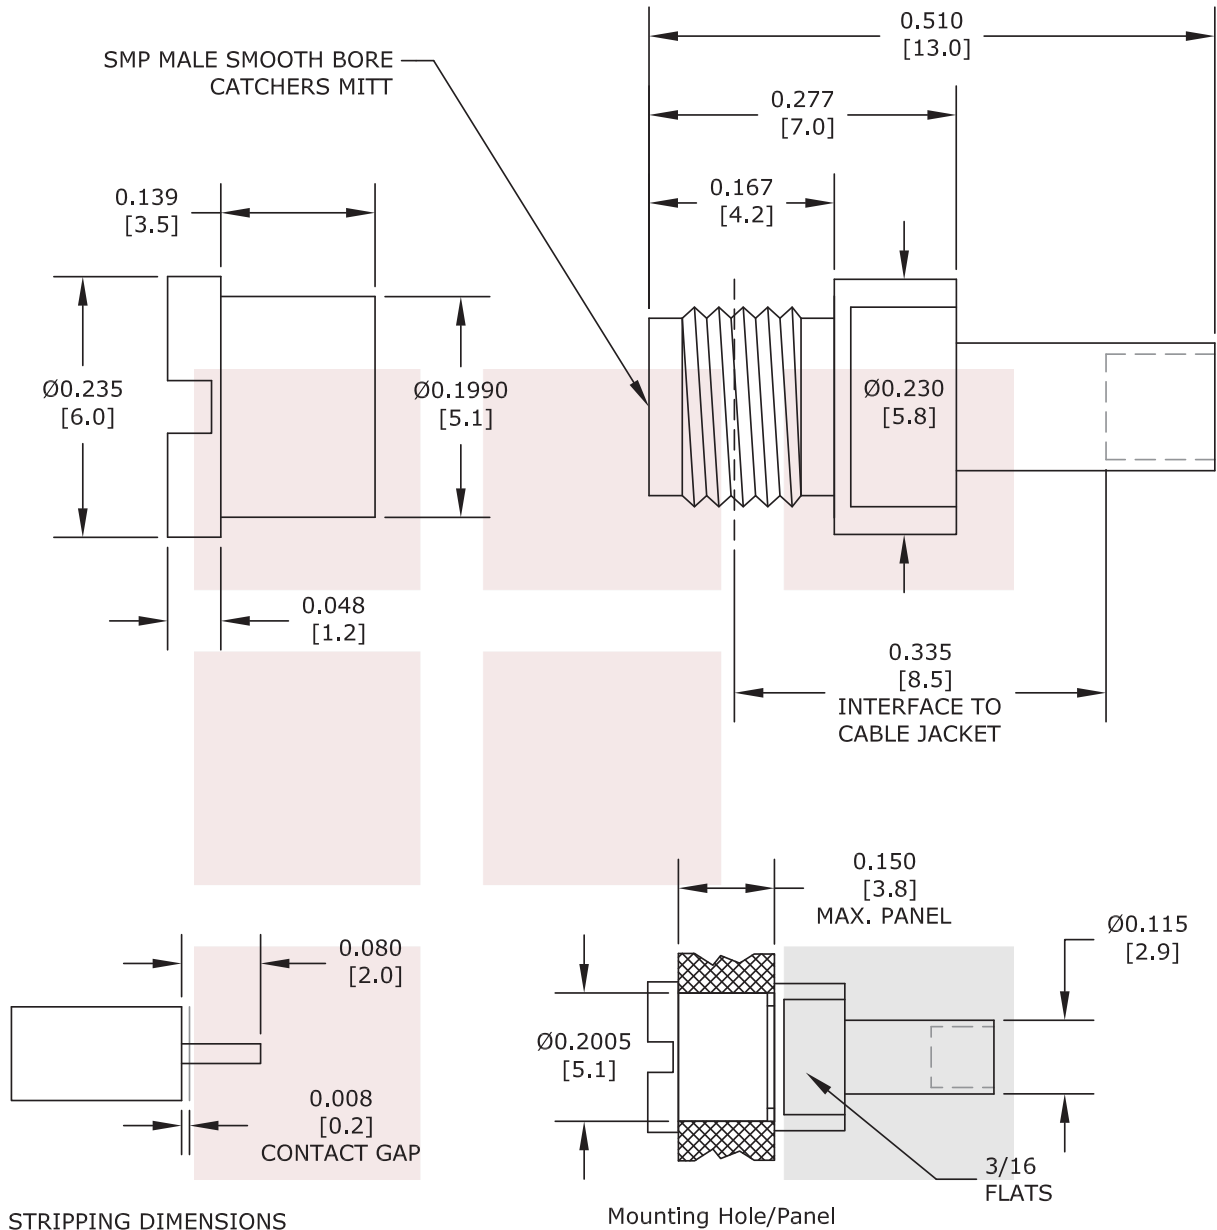

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE

SMP Male Bulkhead Smooth Bore CM Connector
Solder Attachment For RG405, RG405 Tinned, .086 SR
Cable

DWG NO

SC5161

CAGE CODE

3FKR5

CAD FILE

112916

SHEET

SCALE

N/A

SIZE

A

41742

RG405 Type .086 Semi-Rigid Coax Cable with a Bare Copper Outer Conductor in Coiled Sections

.086 diameter semi-rigid coaxial cable is the cable of choice for many RF and Microwave engineers. .086 cables sometimes referred to as RG405 based on the mil specification for semi-rigid cable of this diameter has a maximum operating frequency of 40 GHz. This form factor is widely used in the RF industry and many connector series and configurations are available for this cable. Because of the solid copper wall design the cable can be formed using proper tooling with a minimum inside bend radius of .12 inches.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		40	GHz
Impedance		50		Ohms
DWV (AC)			5,000	Vrms

Performance by Frequency Band

Description	F1	F2	F3	F4	F5	Units
Frequency	1	10	20			GHz
Attenuation, Typ	22 72.18	80 262.47	120 393.7			dB/100ft dB/100m
Power In (CW), Max	130	35	20			Watts

Mechanical Specifications

Min. Bend Radius (Installation) 0.12 in [3.05 mm]

Construction Specifications

Description	Material and Plating	Diameter
Inner Conductor	Copper Clad Steel, Silver	0.02 in [0.51 mm]
Conductor Type	Solid	
Dielectric	PTFE	0.066 in [1.68 mm]
Outer Conductor	Copper, Bare	0.087 in [2.21 mm]
Jacket	Tan	

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

RoHS Compliant Yes
 REACH Compliant 12/17/2014

Configuration:

- Semi-Rigid Cable

Features:

- Silver Plated Copper Clad Steel center conductor
- PTFE dielectric material
- Bare Copper Outer Conductor
- Operating to 40 GHz
- Minimum inside bend radius of .12 inches
- ROHS compliant

Applications:

- RF and Microwave Cable Assemblies to 40 GHz
- Preformed cable assemblies to insure fit and layout
- Test Equipment port jumpers

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Plotted and Other Data


Notes:

RG405 Type .086 Semi-Rigid Coax Cable with a Bare Copper Outer Conductor in Coiled Sections from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [RG405 Type .086 Semi-Rigid Coax Cable with a Bare Copper Outer Conductor in Coiled Sections FM-SR086CU-COIL](#)

URL: <http://www.fairviewmicrowave.com/rg405-type-.086-semi-rigid-coax-cable-copper-fm-sr086cu-coil-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

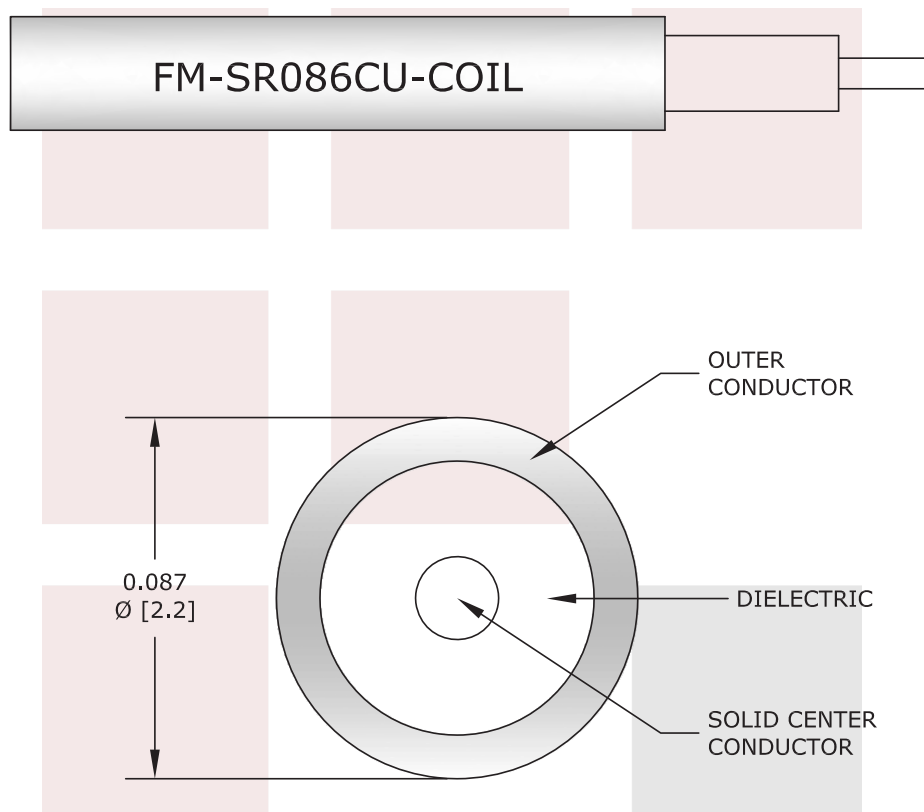

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE RG405 Type .086 Semi-Rigid Coax Cable with a Bare Copper Outer Conductor in Coiled Sections		DWG NO FM-SR086CU-COIL		CAGE CODE 3FKR5	
CAD FILE	012716	SHEET	SCALE	N/A	SIZE A 2233