

### FMCN1940 DATA SHEET

# RA SMA Male Low PIM Connector Solder Attachment for FM-SR141TB, FM-SR141TBJ, FM-SR141CU-STR, FM-SR141CUTN-COIL Cable

RA SMA male connector with solder/solder attachment for FM-SR141TB, FM-SR141TBJ, FM-SR141CU-STR and FM-SR141CUTN-COIL, part number FMCN1940, from Fairview Microwave is in-stock and ships same day. This SMA male connector operates up to a maximum frequency of 6 GHz. The SMA male connector also has low passive intermodulation (PIM) of -155 dBc. Its right angle body geometry facilitates connections in tight spaces.

Fairview's RA SMA male connector FMCN1940 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.



| Description             | Min   | Тур | Max  | Units |
|-------------------------|-------|-----|------|-------|
| Frequency Range         | DC    |     | 6    | GHz   |
| Passive Intermodulation |       |     | -155 | dBc   |
| DWV (AC)                |       |     | 750  | Vrms  |
| Insulation Resistance   | 5,000 |     |      | MOhms |
|                         |       |     |      |       |

### **Performance by Frequency**

| Description | F1      | F2     | F3 | F4 | F5 | Units |
|-------------|---------|--------|----|----|----|-------|
| Freq. Range | DC to 3 | 3 to 6 |    |    |    | GHz   |
| VSWR, Max   | 1.15:1  | 1.25:1 |    |    |    |       |

### **Mechanical Specifications**

### **Size**

| Length<br>Width/Dia. | 0.65 in [16.51 mm]<br>0.48 in [12.19 mm] |
|----------------------|--|
| Height               | 0.48 in [12.19 mm]                       |
| Weight               | 0.006 lbs [2.72 g]                       |

### **Material Specifications**

| Description  | Material | Plating   |
|--------------|----------|-----------|
| Contact      | Brass    | Silver    |
| Insulation   | PTFE     |           |
| Body         | Brass    | Tri-Metal |
| Coupling Nut | Brass    | Tri-Metal |



### **Configuration:**

- SMA Male Connector
- 50 Ohms
- Right Angle Body Geometry
- FM-SR141TB, FM-SR141TBJ, FM-SR141CU-STR, FM-SR-141CUTN-COIL Interface Type
- Solder/Solder Attachment
- Low PIM Design

### Features:

- Operating Frequency of 6 GHz Max.
- PIM levels better than -155 dBc
- · Silver Plated Brass Contact

### **Applications:**

- · General Purpose Test
- Wireless Communications
- Custom Cable Assemblies
- Low PIM Applications

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





# **Environmental Specifications Temperature**

Operating Range

-40 to +155 deg C

**Compliance Certifications** (see product page for current document)

### **Plotted and Other Data**

Notes:

RA SMA Male Low PIM Connector Solder Attachment for FM-SR141TB, FM-SR141TBJ, FM-SR141CU-STR, FM-SR141CUTN-COIL Cable from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: RA SMA Male Low PIM Connector Solder Attachment for FM-SR141TB, FM-SR141CU-STR, FM-SR141CUTN-COIL Cable FMCN1940


URL: https://www.fairviewmicrowave.com/sma-male-fm-sr141tb-fm-sr141tbj-fm-sr141cu-str-fm-sr141cutn-coil-connector-fmcn1940-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





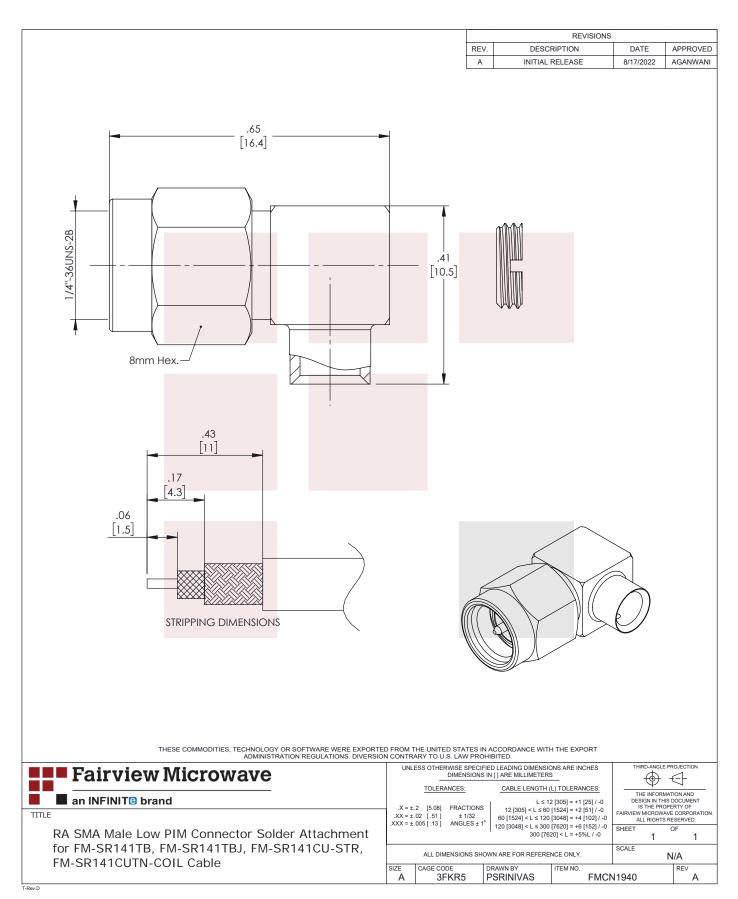





### SMA Female Low PIM Connector Solder Attachment for FM-SR141TB, FM-SR141TBJ, FM-SR141CU-STR, FM-SR141CUTN-COIL Cable

SMA female connector with solder/solder attachment for FM-SR141TB, FM-SR141TBJ, FM-SR141CU-STR and FM-SR141CUTN-COIL, part number FMCN1941, from Fairview Microwave is in-stock and ships same day. This SMA female connector operates up to a maximum frequency of 6 GHz and offers excellent VSWR of 1.2:1. The SMA female connector also has low passive intermodulation (PIM) of -155 dBc.

Fairview's SMA female connector FMCN1941 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.



| Description             | Min | Тур | Max   | Units |
|-------------------------|-----|-----|-------|-------|
| Frequency Range         | DC  |     | 6     | GHz   |
| VSWR                    |     |     | 1.2:1 |       |
| Passive Intermodulation |     |     | -155  | dBc   |
| DWV (AC)                |     |     | 750   | Vrms  |

### **Mechanical Specifications**

| Size       |                    |
|------------|--------------------|
| Length     | 0.71 in [18.03 mm] |
| Width/Dia. | 0.36 in [9.14 mm]  |
| Height     | 0.36 in [9.14 mm]  |
| Weight     | 0.008 lbs [3.63 g] |

### **Material Specifications**

| Description | Material         | Plating   |  |
|-------------|------------------|-----------|--|
| Contact     | Beryllium Copper | Silver    |  |
| Insulation  | PTFE             |           |  |
| Body        | Brass            | Tri-Metal |  |

### **Environmental Specifications**

**Temperature** 

Operating Range -40 to +155 deg C

**Compliance Certifications** (see product page for current document)

### **Plotted and Other Data**

Notes:



### **Configuration:**

- · SMA Female Connector
- 50 Ohms
- Straight Body Geometry
- FM-SR141TB, FM-SR141TBJ, FM-SR141CU-STR, FM-SR-141CUTN-COIL Interface Type
- Solder/Solder Attachment
- Low PIM Design

### Features:

- Operating Frequency of 6 GHz Max.
- Excellent VSWR of 1.2:1
- PIM levels better than -155 dBc
- Silver Plated Beryllium Copper Contact

### **Applications:**

- · General Purpose Test
- Wireless Communications
- Custom Cable Assemblies
- Low PIM Applications

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com






SMA Female Low PIM Connector Solder Attachment for FM-SR141TB, FM-SR141TBJ, FM-SR141CU-STR, FM-SR141CUTN-COIL Cable from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: SMA Female Low PIM Connector Solder Attachment for FM-SR141TB, FM-SR141TBJ, FM-SR141CU-STR, FM-SR141CUTN-COIL Cable FMCN1941


The information contained in this document is accurate to the best of our knowledge and representative of the part

URL: https://www.fairviewmicrowave.com/sma-female-fm-sr141tb-fm-sr141tbj-fm-sr141cu-str-fm-sr141cutn-coil-connector-fmcn1941-p.aspx

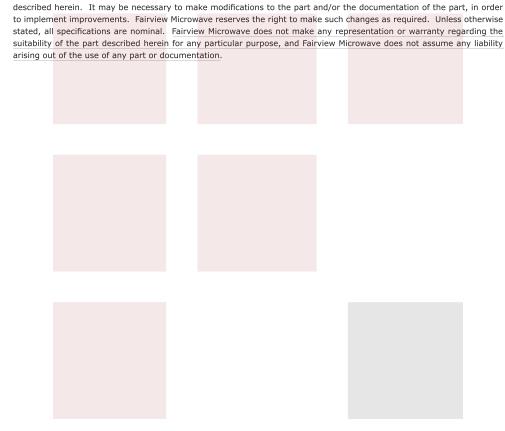





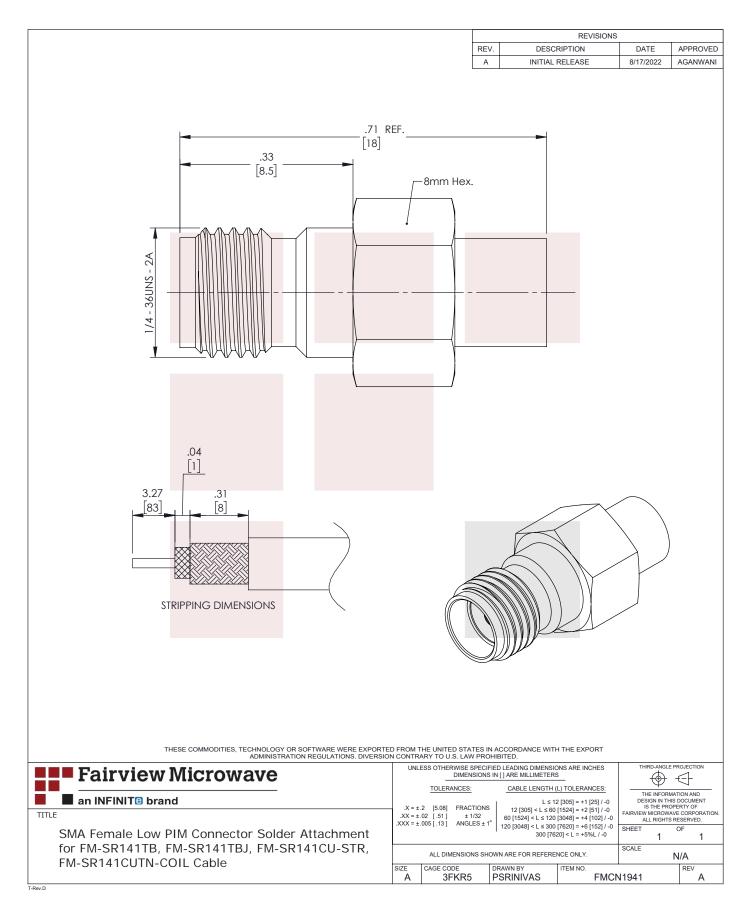





### .141 Semi-rigid Formable Coax Cable Jacket

Formable semi-rigid coax is a hand formable version of standard semi-rigid that does not require complicated and costly preformed cable assemblies. Because the dimensions and electrical characteristics are so closely matched to semi-rigid coax, standard semi-rigid connectors can be used. The tin soaked copper braid outer shield provides excellent RF shielding.



### **Electrical Specifications**

| Description             | Min  | Т  | ур    | Max | Units    |     |
|-------------------------|------|----|-------|-----|----------|-----|
| Frequency Range         | DC   |    |       | 20  | GHz      |     |
| Impedance               |      |    | 50    |     | Ohms     |     |
| Velocity of Propagation |      | 6  | 9.5   |     | %        |     |
| Shielding Effectiveness | 110  |    |       |     | dB       |     |
| Inner Conductor DC Res  | st.  |    |       | 7.8 | Ohms/100 | Oft |
| Outer Conductor DC Res  | ist. |    |       | 5.5 | Ohms/100 | Oft |
| Nominal Capacitance     |      |    | 29    |     | pF/ft    |     |
|                         |      | [9 | 5.14] |     | [pF/m]   |     |

### **Performance by Frequency Band**

|                  |            | ,           |             |              |              |                     |
|------------------|------------|-------------|-------------|--------------|--------------|---------------------|
| Description      | F1         | F2          | F3          | F4           | F5           | Units               |
| Frequency        | 0.5        | 1           | 5           | 10           | 20           | GHz                 |
| Attenuation, Typ | 8<br>26.25 | 12<br>39.37 | 29<br>95.14 | 45<br>147.64 | 70<br>229.66 | dB/100ft<br>dB/100m |

### **Configuration:**

- · Formable Cable
- 1 Shield(s)

### **Features:**

- Dimensionally the same as standard solid outer conductor semirigid coax
- Standard semi-rigid connectors can be used
- Cable is hand formable and does not require special tools to bend
- Connectors are easily soldered to Tin soaked outer conductor
- Cable can be formed more than once without damage to outer conductor
- High RF Shielding >100 dB

### **Mechanical Specifications**

Min. Bend Radius (Repeated)

0.625 in [15.88 mm]

### **Construction Specifications**

| Description     | <b>Material and Plating</b>          | Diameter           |
|-----------------|--------------------------------------|--------------------|
| Inner Conductor | Copper, Silver, 1 Strands            | 0.037 in [0.94 mm] |
| Conductor Type  | Solid                                |                    |
| Dielectric      | PTFE                                 | 0.119 in [3.02 mm] |
| First Shield    | Tinned Copper Braid<br>100% coverage | 0.141 in [3.58 mm] |
| Jacket          | Silver                               |                    |

# **Environmental Specifications Temperature**

Operating Range

-55 to 125 deg C

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





**Compliance Certifications** (see product page for current document)

| <b>Plotte</b> | d and | l Other | Data |
|---------------|-------|---------|------|
|               |       |         |      |

Notes:

.141 Semi-rigid Formable Coax Cable Jacket from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: .141 Semi-rigid Formable Coax Cable Jacket FM-SR141TB

URL: https://www.fairviewmicrowave.com/invalid-alias-formable-coax-cable-fm-sr141tb-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





