


WR-137 Standard Gain Horn with 20 dBi gain, N Female Connector, with Pre-Installed L Mount



FM2WAN137-20NF

Features

- 5.85 GHz to 8.2 GHz
- WR-137 Waveguide Band
- 20 dBi Nominal Gain
- N Female Connector
- Pre-Installed L Mount

Applications

- Antenna Measurements
- Wireless Communication
- Laboratory Use
- Microwave Radio Systems
- Radome Testing
- Automotive Antenna Test Solutions
- Radar Cross Section
- Satellite Antenna Testing

Description

The FM2WAN137-20NF standard gain horn antenna (also known as waveguide horn) from Fairview Microwave is part of our comprehensive selection of waveguide antennas. This standard gain horn is mated with a WR-137 to N female waveguide to coaxial adapter and operates from 5.85 GHz to 8.2 GHz.

Our FM2WAN137-20NF standard gain horn antenna with pre-installed L mount has a nominal gain of 20 dBi with a Horizontal and Vertical HPBW (Half Power Beam Width) of 17.5 dB and 17.3 dB respectively. Fairview Microwave's N female to WR-137 standard gain horns are available in 10, 15 and 20 dBi models with pyramidal shape and connectorized input.

Waveguide antennas, such as the FM2WAN137-20NF are used in a wide variety of applications due to the high-power handling capability, low loss, high directivity, and near constant electrical performance. Our WR-137 waveguide antennas with N female interface is part of over 40,000 RF, microwave and millimeter wave components from Fairview Microwave available worldwide and ship same day.

Configuration

Design	WR-137
Coaxial Interface	N Female


Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	5.85		8.2	GHz
Gain		20		
Horizontal Half Power Beam Width		17.5		Degrees
Vertical Half Power Beam Width		17.3		
Waveguide to Coaxial Adapter				
VSWR			1.3:1	

Mechanical Specifications

Size	
Length	10.71 in [272.03 mm]
Width	4.69 in [119.13 mm]
Height	12.06 in [306.32 mm]
Weight	1.67 lbs [757.5 g]

WR-137 Standard Gain Horn with 20 dBi gain, N
Female Connector, with Pre-Installed L Mount



FM2WAN137-20NF

RF Connector

Type N Female

Waveguide Interface


Waveguide Size WR-137

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:



Typical Performance Data

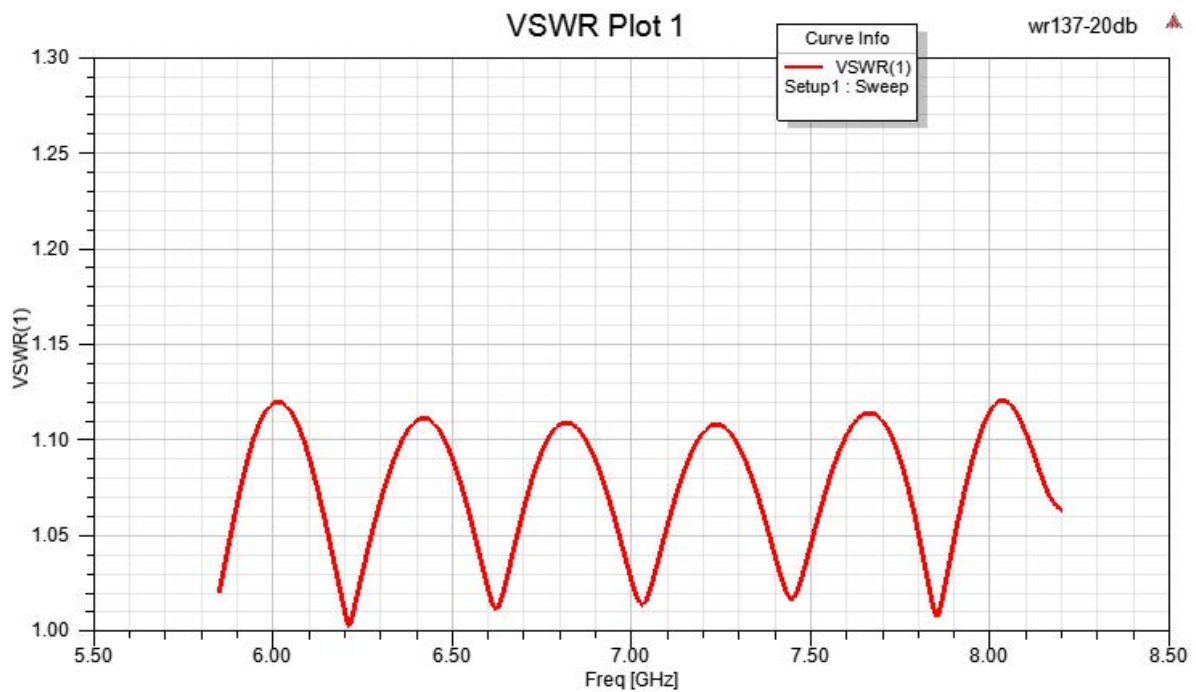


WR-137 Standard Gain Horn with 20 dBi gain, N
Female Connector, with Pre-Installed L Mount




FM2WAN137-20NF

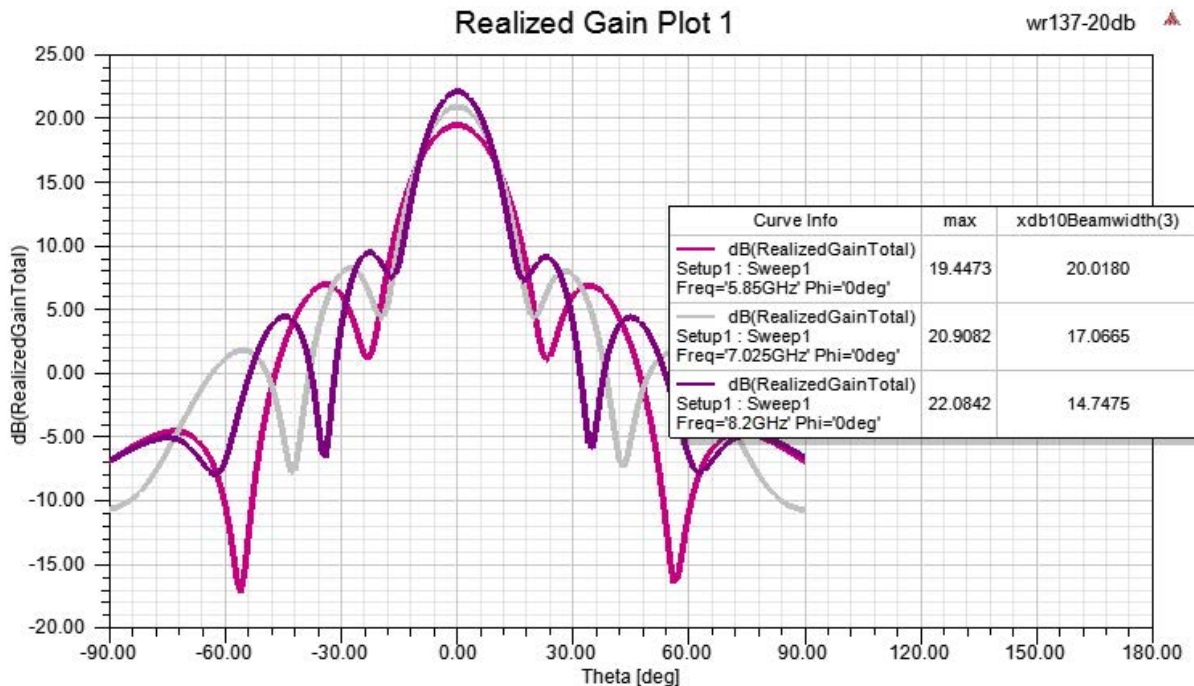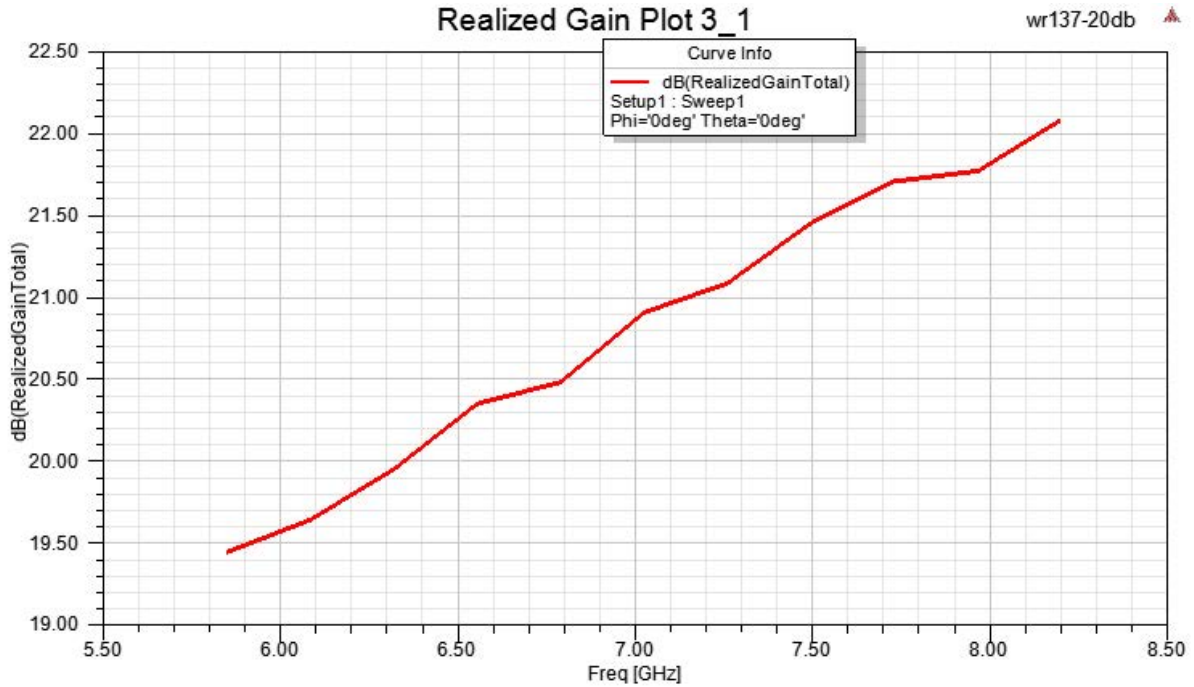

WR-137 Standard Gain Horn with 20 dBi gain, N
Female Connector, with Pre-Installed L Mount



FM2WAN137-20NF

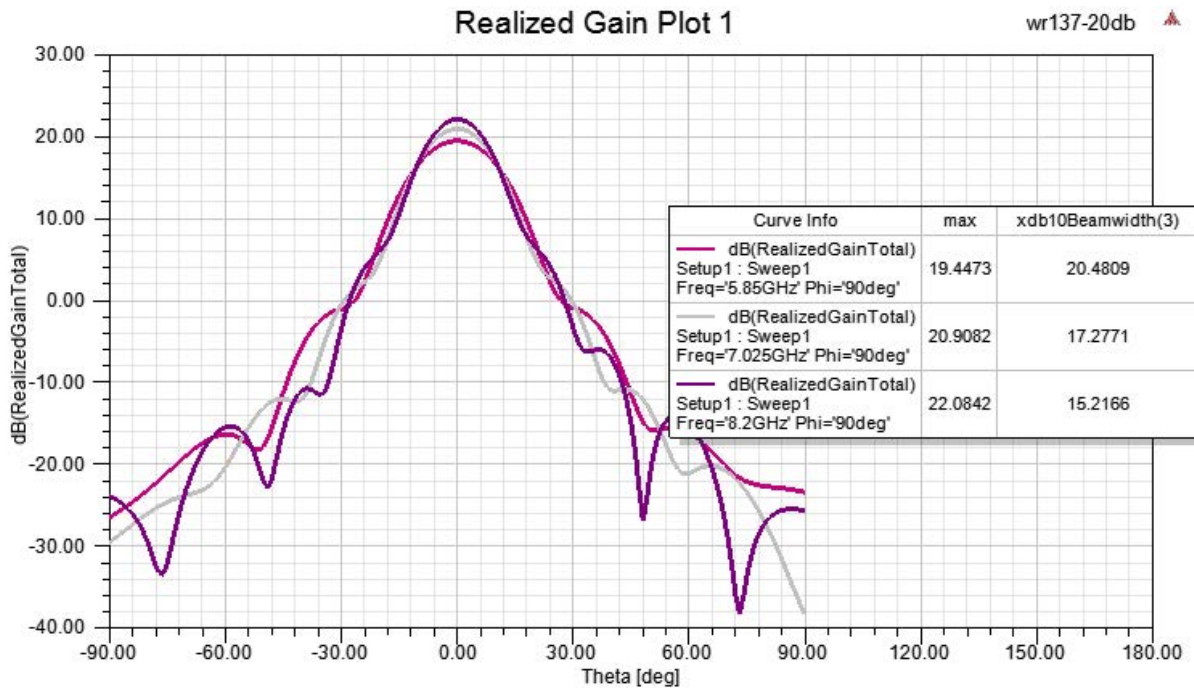

WR-137 Standard Gain Horn with 20 dBi gain, N Female Connector, with Pre-Installed L Mount from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [WR-137 Standard Gain Horn with 20 dBi gain, N Female Connector, with Pre-Installed L Mount FM2WAN137-20NF](#)

URL: <https://www.fairviewmicrowave.com/wr-137-standard-gain-horn-20-dbi-n-fm2wan137-20nf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

WR-137 Standard Gain Horn with 20 dBi gain, N Female Connector, with Pre-Installed L Mount

