

10 MHz to 15 GHz, Broadband Amplifier with 600 mW, 12 dB Gain and SMA


FMAM3037 is a Broadband Bench-top Amplifier that operates across an extremely wide frequency band from 0.01 to 15 GHz. The design utilizes GaAs PHEMT MMIC technology for high efficiency and high linearity. Typical performance includes 12 dB of small signal gain, +37 dBm output IP3, and +28 dBm of P1dB. The design exhibits a very flat gain response across the entire frequency band.

Input/output ports are matched for 50 ohms and are DC blocked. The design also incorporates integrated bias sequencing circuitry and voltage regulators to allow for flexible biasing for both the negative and positive voltage supplies. The Bench Top package is hermetically sealed with field replaceable SMA connectors and comes with a heat sink. And for added confidence, this rugged package assembly is designed to meet MIL-STD-883 test conditions for Hermeticity and Temperature Cycle.

This Broadband Low Noise Amplifier Module is part of Fairview Microwave's expanding line of Amplifier offerings. These modules offer very wide Frequency Range coverage and outstanding electrical performance in the band.

Electrical Specifications (TA= 25°C, VDC1 = 16 Vdc, VDC2 = -12 Vdc)

| Description | Min | Typ | Max | Unit |
|-----------------------------------|------|-----|-----|-------|
| Frequency Range | 0.01 | | 15 | GHz |
| Gain | | 12 | | dB |
| P1dB | | +28 | | dBm |
| Operating DC Voltage 1 | | 16 | | Volts |
| Operating DC Voltage 2 | | -12 | | Volts |
| Operating Temperature Range (OTR) | 0 | | +85 | °C |



Features:

- Benchtop Wideband Power Amplifier
- Extremely Wide Frequency Band
- GaAs PHEMT MMIC Technology
- Gain 12 dB typ
- High Output IP3 +37 dBm
- P1dB +28 dBm
- Regulated Supply and Bias Sequencing
- Hermetically Sealed Module
- Integral Heatsink
- Mil Spec Compliant
- Field Replaceable SMA Connectors
- 0°C to +85°C Operating Temperature

Applications:

- Electronic Warfare
- Electronic Countermeasures
- OC192 Fiber Optic
- Optical Modulator Driver Applications
- Microwave Radio
- VSAT
- Radar
- Space Systems
- Test Instrumentation
- Telecom Infrastructure

Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Performance by Frequency

| Description | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | Units |
|--|------|-----------|------|------------|------|------|-------------|------|------|--------|
| Frequency Range | | 0.5 - 6.0 | | 6.0 - 12.0 | | | 12.0 - 15.0 | | | GHz |
| Gain | 9.5 | 12.5 | | 9 | 12 | | 8 | 11 | | dB |
| Gain Flatness | | ±0.3 | | ±0.3 | | | ±0.6 | | | dB |
| Gain Variation Over Temperature | | 0.02 | | 0.02 | | | 0.02 | | | dB/ °C |
| Noise Figure | | 4.5 | | 4.0 | | | 7.0 | | | dB |
| Input Return Loss | | 22 | | 11 | | | 4 | | | dB |
| Output Return Loss | | 13 | | 12 | | | 10 | | | dB |
| Output Power For 1 dB Compression (P1dB) | 25 | 28 | | 23 | 26 | | 23 | 26 | | dBm |
| Saturated Output Power (Psat) | | 29 | | 27 | | | 28 | | | dBm |
| Output Third Order Intercept (IP3) | | 36 | | 37 | | | 32 | | | dBm |
| Positive Supply Current (+Idc) | | 360 | | 360 | | | 360 | | | mA |
| Negative Supply Current (-Idc) | | -5.5 | | -5.5 | | | -5.5 | | | mA |

Mechanical Specifications

Size

| | |
|------------------|----------------------|
| Length | 4.23 in [107.44 mm] |
| Width | 1.7 in [43.18 mm] |
| Height | 1.68 in [42.67 mm] |
| Weight | 0.396 lbs [179.62 g] |
| Connector Option | Field Replaceable |
| Input Connector | SMA Female |
| Output Connector | SMA Female |

Environmental Specifications

Temperature

| | |
|---------------------|--|
| Operating Range | 0 to +85 deg C |
| Storage Range | -65 to +150 deg C |
| Temperature Cycling | MIL-STD-883, Method 101C, Cond B |
| Hermetic Seal | Gross Leak MIL-STD-883 Method 1014C1/Fine Leak MIL-STD-883, Method 1014A2, 5 x 10 ⁻⁸ atm cc |
| ESD Sensitivity | ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation. |



Compliance Certifications (visit www.FairviewMicrowave.com for current document)


| | |
|----------------|-----|
| RoHS Compliant | Yes |
|----------------|-----|

Plotted and Other Data

Notes:


- Values at 25 °C, sea level

Functional Block Diagram

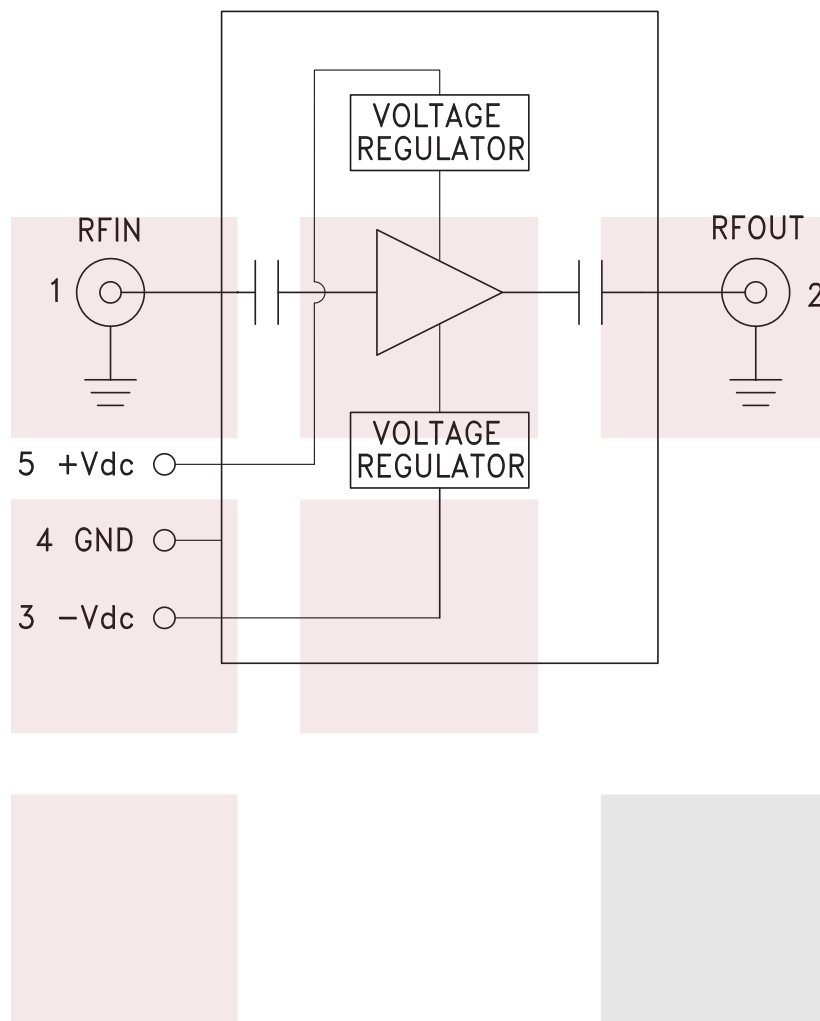


Typical Performance Data


Gain & Return Loss

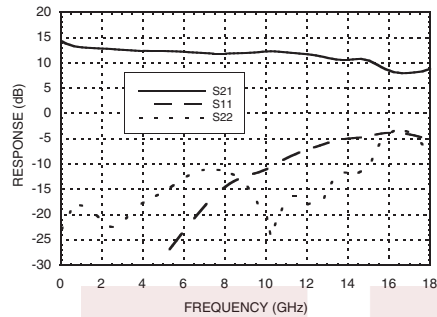


Gain vs. Temperature

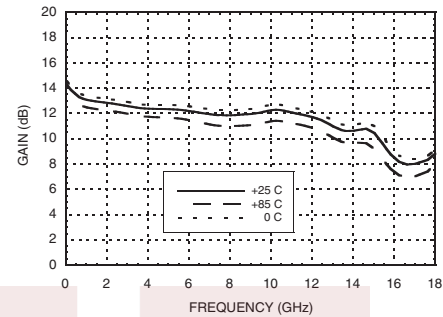


Input Return Loss vs. Temperature

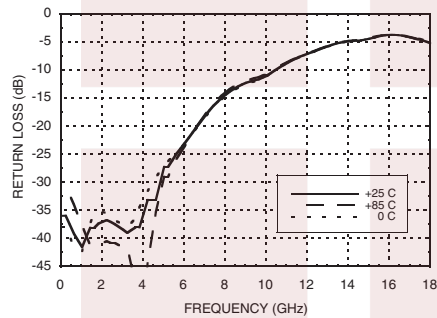


Output Return Loss vs. Temperature

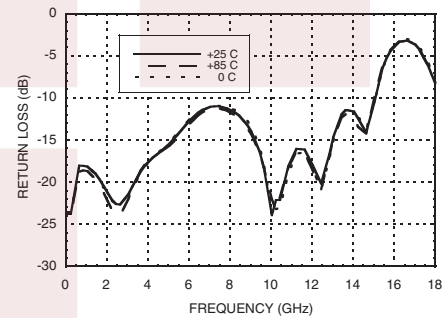


Reverse Isolation vs. Temperature

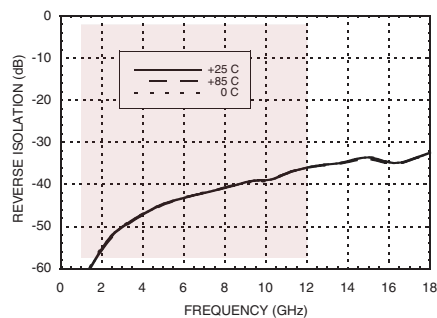


Noise Figure vs. Temperature

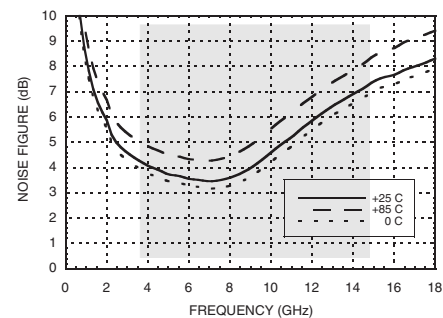


P1dB vs. Temperature

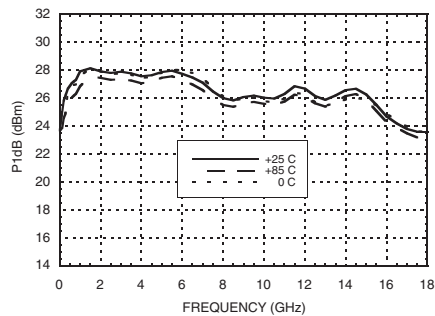


Psat vs. Temperature

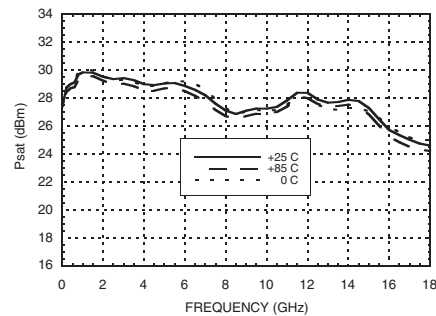


Output IP3 vs. Temperature

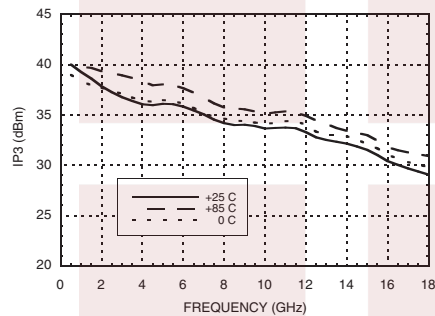


Group Delay

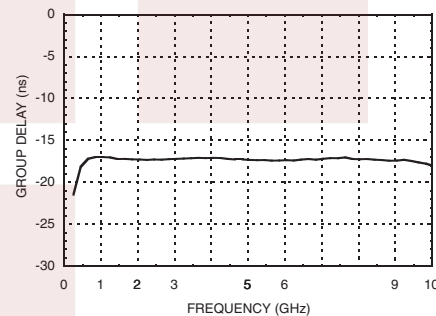

Deviation from Linear Phase

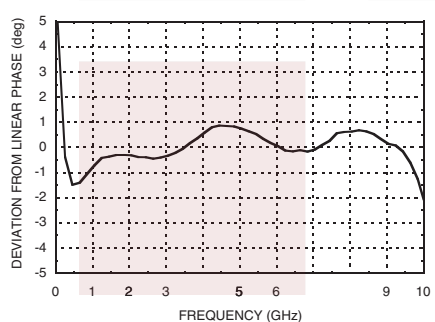

Low Frequency Gain & Return Loss

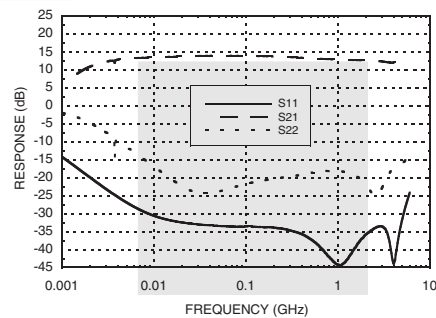

10 MHz to 15 GHz, Broadband Amplifier with 600 mW, 12 dB Gain and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [10 MHz to 15 GHz, Broadband Amplifier with 600 mW, 12 dB Gain and SMA FMAM3037](https://www.fairviewmicrowave.com/10-mhz-15-ghz-broadband-amplifier-fmam3037)


URL: <https://www.fairviewmicrowave.com/10-mhz-15-ghz-broadband-amplifier-fmam3037-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

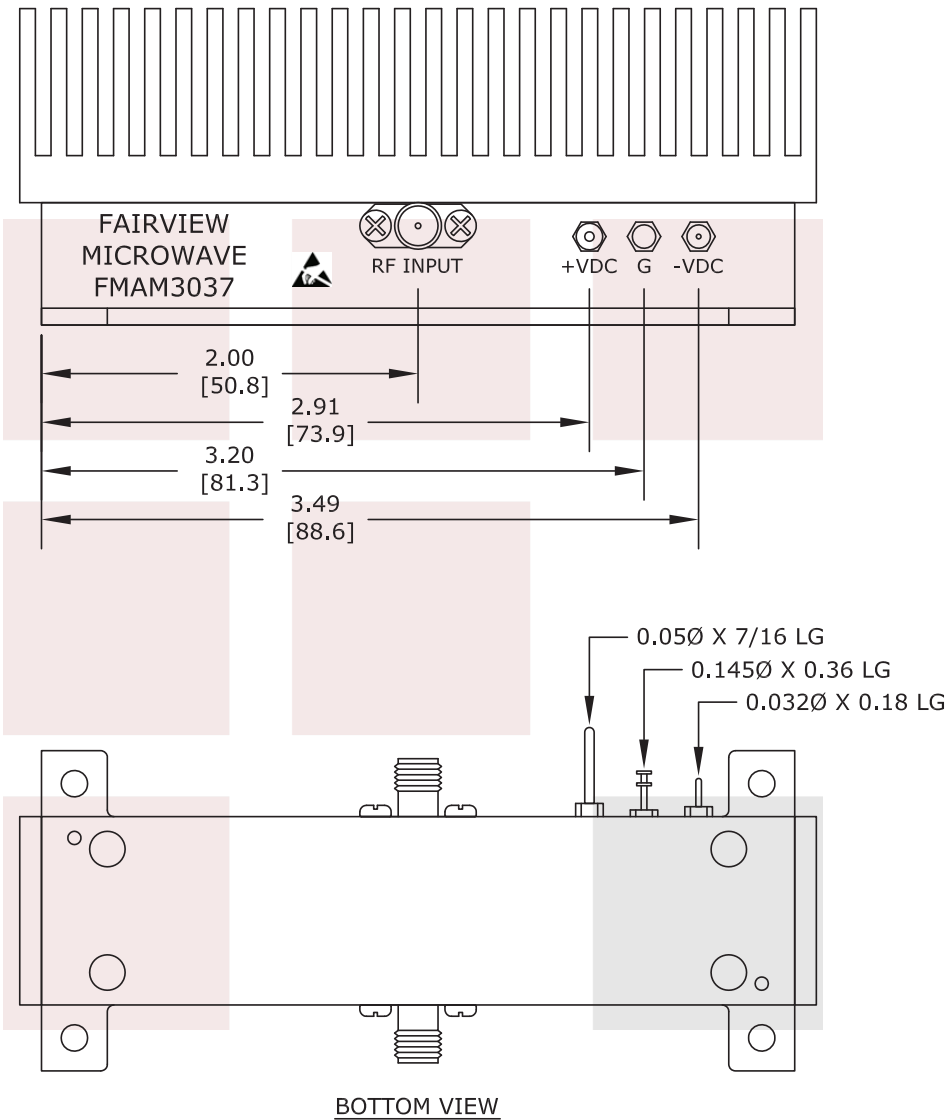

| | | | | | |
|---|--------------------|---|--------------------|-----------|------|
| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | | | |
| TITLE 10 MHz to 15 GHz, Broadband Amplifier with 600 mW, 12 dB Gain and SMA | DWG NO FMAM3037 | | CAGE CODE 3FKR5 | | |
| | CAD FILE 050416 | SHEET | SCALE N/A | SIZE A | 2233 |