

3 dB Fixed Attenuator 75 Ohm N-Type Male (Plug) to 75 Ohm N-Type Female (Jack) DC to 1 GHz rated to 1 Watt Brass Tri-Metal Body 1.25:1 VSWR



## FMAT7752-3

### Features

- DC to 1 GHz Frequency Range
- F-Type Connectorized Design
- Attenuation 3 dB  $\pm$ 0.5 dB
- Max Power 1 Watts (CW)
- Max VSWR of 1.25:1

### Applications

- Instrumentation
- Cable TV and Video Distribution
- Prototyping and Characterization
- Production Systems

### Description

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (or attenuate) a known amount. These attenuator pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock varieties and ships them same day. The FMAT7752-3 is a 3 dB Fixed Attenuator that operates from DC to 1 GHz and is rated to 1 Watt. The versatile coaxial package uses type F male to type F female connectors and is also REACH compliant.

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
Impedance		75		Ohms
Nominal Attenuation		3		dB
Attenuation Accuracy		$\pm$ 0.5		dB
VSWR			1.25:1	
Input Power, CW			1	Watt

### Mechanical Specifications

#### Size

Length	2.03 in [51.56 mm]
Width/Diameter	0.43 in [10.92 mm]
Height	0.43 in [10.92 mm]
Weight	0.04 lbs [18.14 g]
Body Material and Plating	Brass, Tri-Metal

#### Configuration

Design	Fixed, Bidirectional
Design Type	Standard
Package Style	Connectorized

3 dB Fixed Attenuator 75 Ohm N-Type Male (Plug) to 75 Ohm N-Type Female (Jack) DC to 1 GHz rated to 1 Watt Brass Tri-Metal Body 1.25:1 VSWR



## FMAT7752-3

### Connectors

Description	Connector 1	Connector 2
Type	F Male	F Female
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal

### Environmental Specifications

#### Temperature

Operating Range -50 to +80 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

### Typical Performance Data

3 dB Fixed Attenuator 75 Ohm N-Type Male (Plug) to 75 Ohm N-Type Female (Jack) DC to 1 GHz rated to 1 Watt Brass Tri-Metal Body 1.25:1 VSWR from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [3 dB Fixed Attenuator 75 Ohm N-Type Male \(Plug\) to 75 Ohm N-Type Female \(Jack\) DC to 1 GHz rated to 1 Watt Brass Tri-Metal Body 1.25:1 VSWR FMAT7752-3](#)

URL: <https://www.fairviewmicrowave.com/3db-fixed-attenuator-f-male-f-female-1-watt-fmat7752-3-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMAT7752-3 CAD Drawing

3 dB Fixed Attenuator 75 Ohm N-Type Male (Plug) to 75 Ohm N-Type Female (Jack) DC to 1 GHz rated to 1 Watt Brass Tri-Metal Body 1.25:1 VSWR

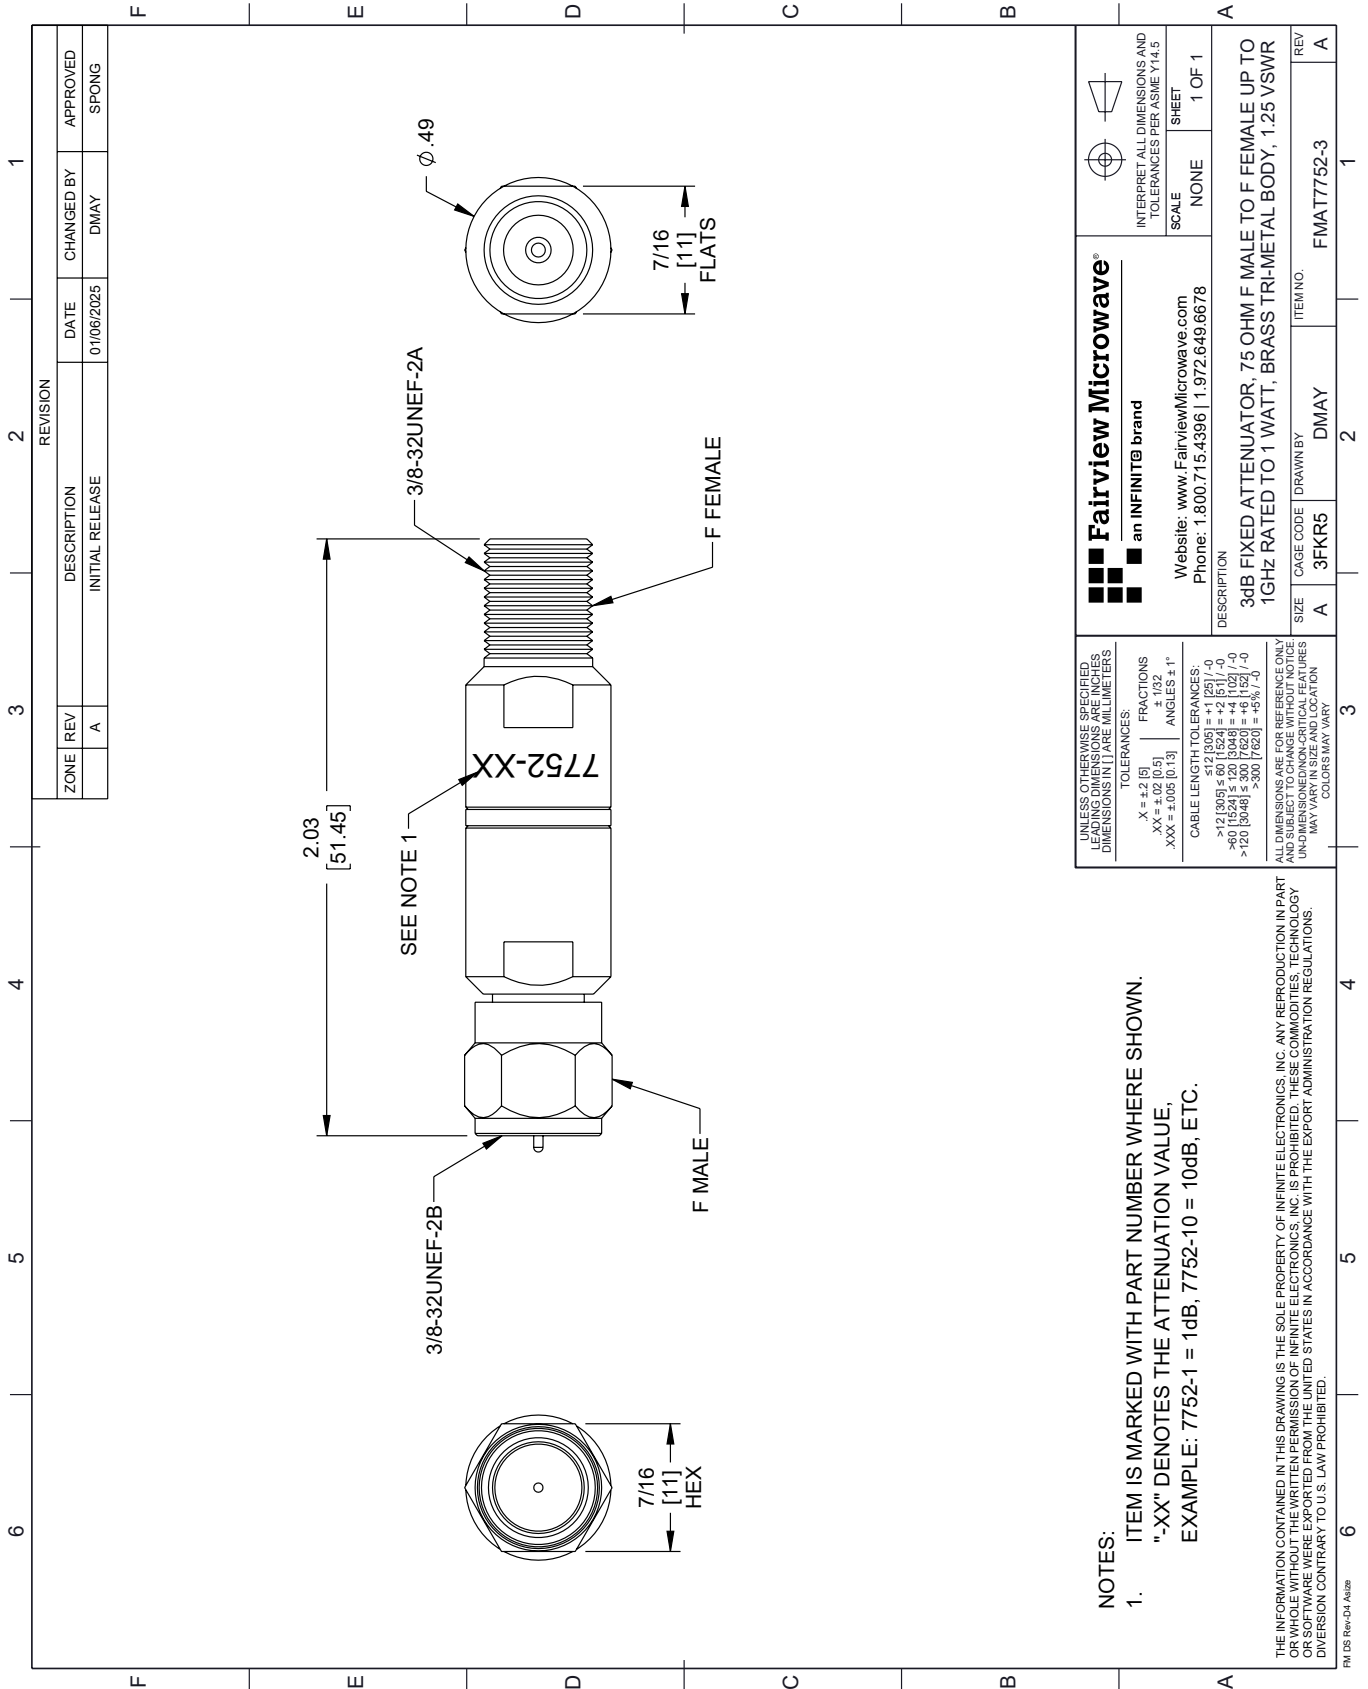

REVISION		DATE	CHANGED BY	APPROVED	
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	01/06/2025	DMAY	SPONG

**Fairview Microwave®**  
an INFINIT® brand

Website: [www.FairviewMicrowave.com](http://www.FairviewMicrowave.com)  
Phone: 1.800.715.4396 | 1.972.649.6678

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE MILLIMETERS.

TOLERANCES:  
 .X = ±.2 (5)  
 .XX = ±.02 (0.5)  
 .XXX = ±.005 (0.13)  
 FRACTIONS ± 1/32  
 ANGLES ± 1°

CABLE LENGTH TOLERANCES:  
 <12 (305) ≤ 60 (1524) = ±.1 (25) / -0  
 >60 (1524) ≤ 120 (3048) = ±.4 (102) / -0  
 >120 (3048) ≤ 300 (7620) = ±.8 (20) / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNDIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE NONE  
SHEET 1 OF 1

DESCRIPTION  
3dB FIXED ATTENUATOR, 75 OHM F MALE TO F FEMALE UP TO 1GHz RATED TO 1 WATT, BRASS TRI-METAL BODY, 1.25 VSWR

SIZE A  
CAGE CODE 3FKR5  
DRAWN BY DMAY  
ITEM NO. FMAT7752-3

REV A

**NOTES:**

- ITEM IS MARKED WITH PART NUMBER WHERE SHOWN.  
"-XX" DENOTES THE ATTENUATION VALUE,  
EXAMPLE: 7752-1 = 1dB, 7752-10 = 10dB, ETC.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

FM DS Rev-D4 A426