

SMA Male to N Male Cable M17/60-RG142 Coax

FMC00184




Configuration

- Connector 1: SMA Male
- Connector 2: N Male
- Cable Type: RG142
- Coax Flex Type: Flexible

Features

- Max Frequency 8 GHz
- Double Shielded
- FEP Jacket

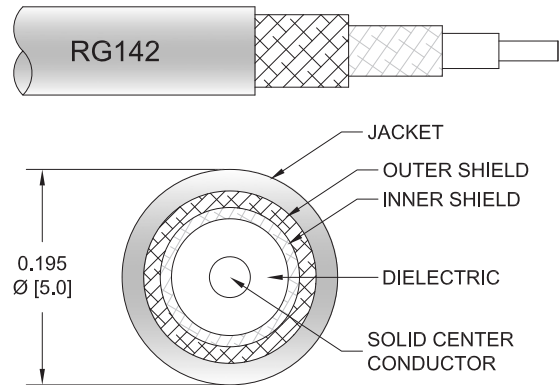

Applications

- General Purpose
- Laboratory Use

Description

The SMA male to type N male cable using M17/60-RG142 coax, part number FMC00184, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to type N cable assembly has a male to male gender configuration with 50 ohm flexible RG142 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC00184 SMA male to type N male cable assembly operates to 8 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Specifications by Frequency

SMA Male to N Male Cable M17/60-RG142 Coax



FMC00184

Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
		Frequency	500	1000	2000	4000	MHz	
FMC00184	Custom Lengths Available	Insertion Loss (Typ.)	0.09	0.14	0.2	0.31	dB/ft	
			0.3	0.45	0.66	1.02	dB/m	
FMC00184-12	12 inch	Insertion Loss (Typ.)	0.29	0.34	0.4	0.51	dB	0.136
FMC00184-24	24 inch	Insertion Loss (Typ.)	0.38	0.48	0.6	0.82	dB	0.179
FMC00184-36	36 inch	Insertion Loss (Typ.)	0.47	0.62	0.8	1.13	dB	0.222
FMC00184-48	48 inch	Insertion Loss (Typ.)	0.56	0.75	1	1.44	dB	0.264
FMC00184-72	72 inch	Insertion Loss (Typ.)	0.74	1.03	1.4	2.06	dB	0.349

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.136 pounds
Additional Weight per Inch:	0.00355 pounds

Mechanical Specifications

Cable Assembly

Weight	0.136 lbs [61.69 g]
--------	---------------------

Cable

Cable Type	RG142
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper
Shield Layer 2	Silver Plated Copper
Jacket Material	FEP, Beige
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	1 in [25.4 mm]

SMA Male to N Male Cable M17/60-RG142 Coax

FMC00184



Connectors

Description	Connector 1	Connector 2
Type	SMA Male	N Male
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles		500
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 µin minimum	ASTM B488
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Nickel
Body Plating Specification	3 µin minimum	QQ-N-290
Coupling Nut Material and Plating	Brass, Gold	Brass, Nickel
Coupling Nut Plating Specification	3 µin minimum	QQ-N-290
Hex Size	5/16 inch	
Torque	3 in-lbs 0.34 Nm	

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMA Male to N Male Cable M17/60-RG142 Coax



FMC00184

Typical Performance Data

How to Order

Part Number Configuration:

FMC00184

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length
Base Number

Example: FMC00184-12 = 12 inches long cable
FMC00184-100cm = 100 cm long cable

SMA Male to N Male Cable M17/60-RG142 Coax from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMA Male to N Male Cable M17/60-RG142 Coax FMC00184](#)

URL: <https://www.fairviewmicrowave.com/sma-male-to-n-male-cable-m17-60-rg142-coax-fmc00184-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMC00184 CAD Drawing
SMA Male to N Male Cable M17/60-RG142 Coax

