

## SMA Female to MMCX Jack Cable RG-316 Coax in 60 Inch

The SMA female to MMCX jack 60 inch cable using RG-316 coax, part number FMC00363-60, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to MMCX cable assembly has a female to jack gender configuration with 50 ohm flexible RG316 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC00363-60 SMA female to MMCX jack cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			250	Vrms
Jacket Spark			2,000	Vrms

### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.75	0.85	1.05	2.1	3.1	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. Insertion Loss is estimated as 0.1 dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length\* 60 in [152.4 cm]

#### Cable

Cable Type RG316  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper Clad Steel, Silver  
 Dielectric Type PTFE  
 Number of Shields 1  
 Shield Layer 1 Silver Plated Copper Braid  
 Jacket Material FEP, Tan  
 Jacket Diameter 0.102 in [2.59 mm]



### Configuration:

- SMA Female
- MMCX Jack
- RG316

### Features:

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

### Applications:

- General Purpose
- Laboratory Use

Fairview Microwave  
 301 Leora Ln., Suite 100  
 Lewisville, TX 75056  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Female	MMCX Jack
Specification	MIL-STD-348A	BS EN 122340
Impedance	50 Ohms	50 Ohms
Contact Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Spec.	50 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Outer Cond Material & Plating	Brass, Gold	
Outer Cond Plating Spec.	3 µin minimum	
Body Material & Plating		Brass, Gold
Body Plating Spec.		3 µin minimum
Hex Size	1/4 inch	

**Environmental Specifications**

**Temperature**

Operating Range -55 to +155 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

- Values at 25°C, sea level.

**How to Order**

Part Number Configuration:

**FMC00363 - xx uu**

cm = Centimeters  
<blank> = Inches  
Length

Example: FMC00363-12 = 12 inches long cable  
FMC00363-100cm = 100 cm long cable


SMA Female to MMCX Jack Cable RG-316 Coax in 60 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [SMA Female to MMCX Jack Cable RG-316 Coax in 60 Inch FMC00363-60](#)

URL: <https://www.fairviewmicrowave.com/sma-female-mmcx-jack-cable-rg316-coax-fmc00363-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/02/20	SELLIS

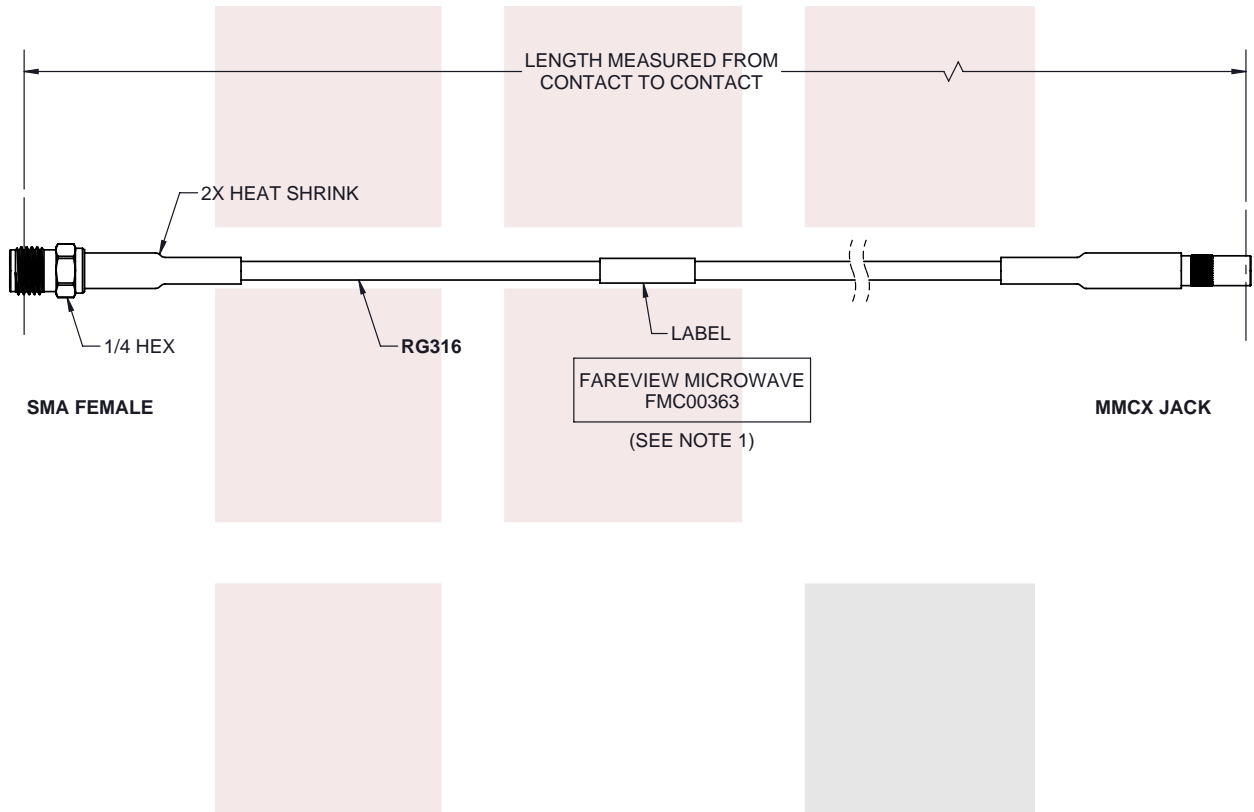

**NOTES:**

1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.  
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END 6.0" FROM THE END OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

<p><b>Fairview Microwave</b> an INFINIT<sup>®</sup> brand</p>	<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p><b>TOLERANCES:</b></p> <table border="0"> <tr> <td>.X = ±.2 [ .508 ]</td> <td>FRACTIONS ± 1/32</td> <td>CABLE LENGTH (L) TOLERANCES:</td> </tr> <tr> <td>.XX = ±.02 [ .51 ]</td> <td></td> <td>L ≤ 12 [305] = +1 [25] / -0</td> </tr> <tr> <td>.XXX = ±.005 [ .13 ]</td> <td>ANGLES ± 1°</td> <td>12 [305] &lt; L ≤ 60 [1524] = +2 [51] / -0</td> </tr> <tr> <td></td> <td></td> <td>60 [1524] &lt; L ≤ 120 [3048] = +4 [102] / -0</td> </tr> <tr> <td></td> <td></td> <td>120 [3048] &lt; L ≤ 300 [7620] = +6 [152] / -0</td> </tr> <tr> <td></td> <td></td> <td>300 [7620] &lt; L = +5%L / -0</td> </tr> </table>		.X = ±.2 [ .508 ]	FRACTIONS ± 1/32	CABLE LENGTH (L) TOLERANCES:	.XX = ±.02 [ .51 ]		L ≤ 12 [305] = +1 [25] / -0	.XXX = ±.005 [ .13 ]	ANGLES ± 1°	12 [305] < L ≤ 60 [1524] = +2 [51] / -0			60 [1524] < L ≤ 120 [3048] = +4 [102] / -0			120 [3048] < L ≤ 300 [7620] = +6 [152] / -0			300 [7620] < L = +5%L / -0	<p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.</p>
	.X = ±.2 [ .508 ]	FRACTIONS ± 1/32	CABLE LENGTH (L) TOLERANCES:																		
.XX = ±.02 [ .51 ]		L ≤ 12 [305] = +1 [25] / -0																			
.XXX = ±.005 [ .13 ]	ANGLES ± 1°	12 [305] < L ≤ 60 [1524] = +2 [51] / -0																			
		60 [1524] < L ≤ 120 [3048] = +4 [102] / -0																			
		120 [3048] < L ≤ 300 [7620] = +6 [152] / -0																			
		300 [7620] < L = +5%L / -0																			
<p>TITLE</p> <p>SMA Female to MMCX Jack Cable RG-316 Coax in 60 Inch</p>	<p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>	<p>SHEET 1 OF 1</p> <p>SCALE N/A</p>																			
<p>SIZE A</p>	<p>CAGE CODE 3FKR5</p>	<p>DRAWN BY BPUCHASKI</p>	<p>ITEM NO. FMC00363</p>	<p>REV A</p>																	

T-Rev.D