

## N Male to N Male Cable LMR-240 Coax in 200 CM with Times Microwave components

The type N male to type N male 200 cm cable using LMR-240 coax, part number FMC00401-200CM, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC00401-200CM type N male to type N male cable assembly operates to 5.8 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

| Description                   | Min | Typ          | Max   | Units                            |
|-------------------------------|-----|--------------|-------|----------------------------------|
| Frequency Range               | DC  |              | 5.8   | GHz                              |
| VSWR                          |     |              | 1.4:1 |                                  |
| Velocity of Propagation       |     | 84           |       | %                                |
| RF Shielding                  | 90  |              |       | dB                               |
| Group Delay                   |     | 1.21 [3.97]  |       | ns/ft [ns/m]                     |
| Capacitance                   |     | 24.2 [79.4]  |       | pF/ft [pF/m]                     |
| Inductance                    |     | 0.06 [0.2]   |       | uH/ft [uH/m]                     |
| DC Resistance Inner Conductor |     | 3.2 [10.5]   |       | $\Omega$ /1000ft [ $\Omega$ /Km] |
| DC Resistance Outer Conductor |     | 3.89 [12.76] |       | $\Omega$ /1000ft [ $\Omega$ /Km] |
| Jacket Spark                  |     |              | 5,000 | Vrms                             |

### Performance by Frequency

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 0.25 | 0.5  | 1    | 2.5  | 5.8  | GHz   |
| Insertion Loss (Typ.) | 0.45 | 0.56 | 0.72 | 1.04 | 1.53 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length\* 78.73 in [199.97 cm]

#### Cable

Cable Type LMR-240  
 Impedance 50 Ohms  
 Inner Conductor Type Solid



### Configuration:

- N Male
- N Male
- LMR-240

### Features:

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

### Applications:

- General Purpose
- Laboratory Use
- Antenna Installations
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

Fairview Microwave  
 301 Leora Ln., Suite 100  
 Lewisville, TX 75056  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

|                                      |                        |
|--------------------------------------|------------------------|
| Inner Conductor Material and Plating | Copper                 |
| Dielectric Type                      | PE (F)                 |
| Number of Shields                    | 2                      |
| Shield Layer 1                       | Aluminum Tape          |
| Shield Layer 2                       | Tinned Copper Braid    |
| Jacket Material                      | PE, Black              |
| Jacket Diameter                      | 0.24 in [6.1 mm]       |
| One Time Minimum Bend Radius         | 0.75 in [19.05 mm]     |
| Repeated Minimum Bend Radius         | 2.5 in [63.5 mm]       |
| Bending Moment                       | 0.25 lbs-ft [0.34 N-m] |
| Flat Plate Crush                     | 20 lbs/in [0.36 Kg/mm] |
| Tensile Strength                     | 80 lbs [36.29 Kg]      |

### Connectors

| Description                     | Connector 1      | Connector 2      |
|---------------------------------|------------------|------------------|
| Type                            | N Male           | N Male           |
| Impedance                       | 50 Ohms          | 50 Ohms          |
| Contact Material & Plating      | Brass, Gold      | Brass, Gold      |
| Dielectric Type                 | PTFE             | PTFE             |
| Body Material & Plating         | Brass, Tri-Metal | Brass, Tri-Metal |
| Coupling Nut Material & Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Hex Size                        | 13/16 inch       | 13/16 inch       |

### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

### Environmental Specifications

#### Temperature

|                 |                  |
|-----------------|------------------|
| Operating Range | -40 to +85 deg C |
| Storage Range   | -70 to +85 deg C |

### Compliance Certifications (see [product page](#) for current document)


### Plotted and Other Data

Notes:

### How to Order

Part Number Configuration:

**FMC00401 - xx uu**

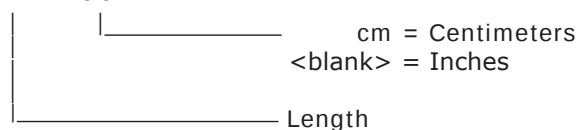

Example: FMC00401-12 = 12 inches long cable  
 FMC00401-100cm = 100 cm long cable

N Male to N Male Cable LMR-240 Coax in 200 CM with Times Microwave components from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: [N Male to N Male Cable LMR-240 Coax in 200 CM with Times Microwave components FMC00401-200CM](#)

URL: <https://www.fairviewmicrowave.com/n-male-n-male-cable-lmr240-coax-fmc00401-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



| REVISIONS |                 |           |          |
|-----------|-----------------|-----------|----------|
| REV.      | DESCRIPTION     | DATE      | APPROVED |
| A         | INITIAL RELEASE | 1/24/2020 | S.ELLIS  |

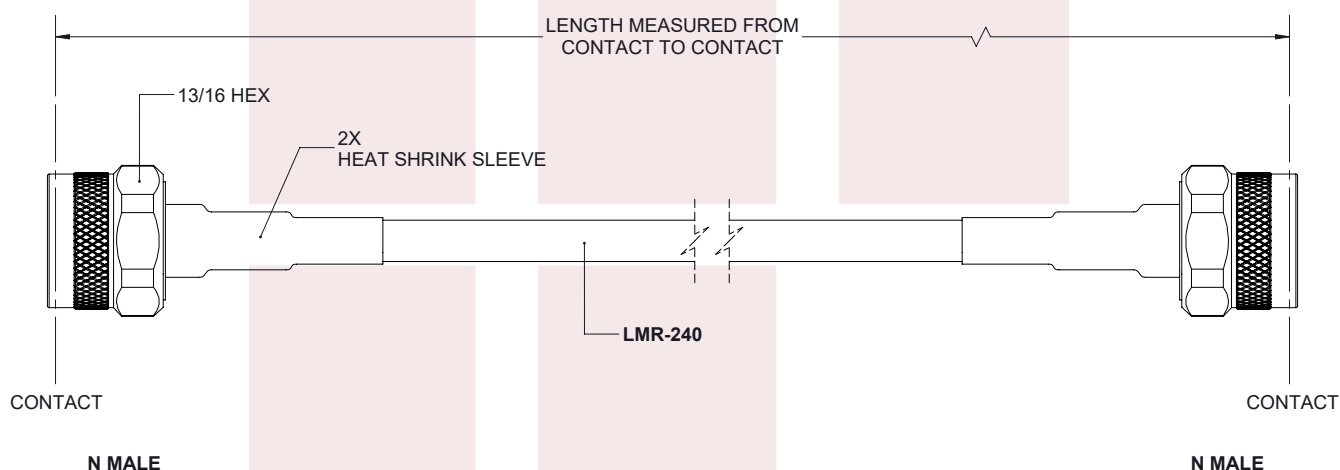

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

|                                                                                      |           |                                                                                                                                                                                        |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
|--------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <p><b>Fairview Microwave</b><br/>an INFINITE brand</p>                               |           | <p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES<br/>DIMENSIONS IN [ ] ARE MILLIMETERS</p>                                                                                  |          | <p>THIRD-ANGLE PROJECTION</p>                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
| <p>TITLE</p>                                                                         |           | <p>TOLERANCES:</p>                                                                                                                                                                     |          | <p>CABLE LENGTH (L) TOLERANCES:</p>                                                                                                                                                                                                                                                                                                                                                                                                              |  |
| <p>N Male to N Male Cable LMR-240 Coax in 200 CM with Times Microwave components</p> |           | <p> <math>.X = \pm .2</math> [5.08] FRACTIONS<br/> <math>.XX = \pm .02</math> [.51] <math>\pm 1/32</math><br/> <math>.XXX = \pm .005</math> [.13] ANGLES <math>\pm 1^\circ</math> </p> |          | <p> <math>L \leq 12</math> [305] = <math>\pm 1</math> [25] / -0<br/> <math>12</math> [305] &lt; <math>L \leq 60</math> [1524] = <math>\pm 2</math> [51] / -0<br/> <math>60</math> [1524] &lt; <math>L \leq 120</math> [3048] = <math>\pm 4</math> [102] / -0<br/> <math>120</math> [3048] &lt; <math>L \leq 300</math> [7620] = <math>\pm 6</math> [152] / -0<br/> <math>300</math> [7620] &lt; <math>L = +5\%L</math> / -0                 </p> |  |
| <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>                                  |           | <p>SCALE</p>                                                                                                                                                                           |          | <p>SHEET 1 OF 1</p>                                                                                                                                                                                                                                                                                                                                                                                                                              |  |
| SIZE                                                                                 | CAGE CODE | DRAWN BY                                                                                                                                                                               | ITEM NO. | REV                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |
| A                                                                                    | 3FKR5     | K.DANG                                                                                                                                                                                 | FMC00401 | A                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |

T-Rev.D